

# ZION

TRACK SYSTEM



## Model No: LM-010-TLCW2\*\*-15W

### TECHNICAL DESCRIPTION

Single head square design, Its solid appearance can provide more luminous flux. It can be rotated 355° horizontally and 90° vertically. Tunable White allows the colour temperature to be continuously adjusted from warm light to cool light.


### INSTALLATION

Track Mounted

### AREAS OF APPLICATION

• Hotel • Club • Supermarket • Store • Office • Residential

### DIAGRAM

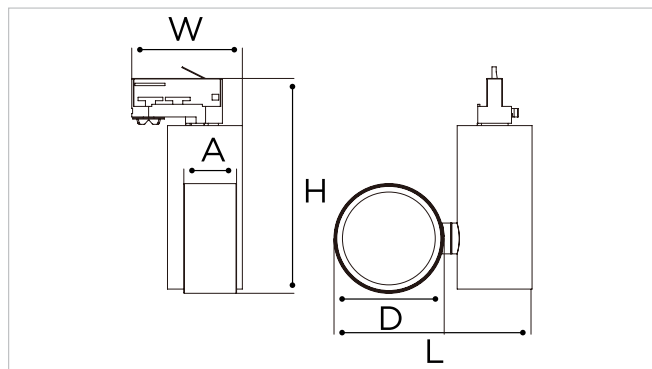


### MODEL NUMBER SELECTION

LM-010-TLCW2     - 15W

S- Non Dimmable  
D - Dali  
A - 0-10, 1-10  
P - Phase  
B - Bluetooth

CW - 6000K  
NW - 4000K  
WW - 3000K

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

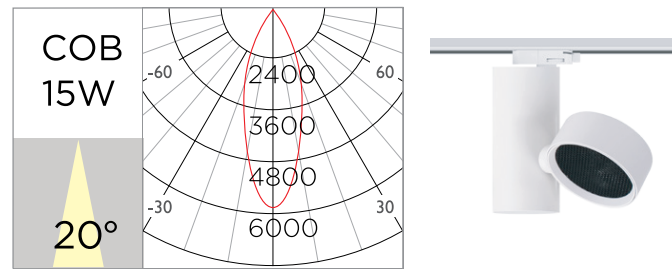

## PHYSICAL CHARACTERISTICS

|                  |                                      |                      |                             |
|------------------|--------------------------------------|----------------------|-----------------------------|
| Installation     | Track Mounted                        | IP-Rating            | IP20                        |
| Driver           | Built In Driver                      | IK-Rating            | IK03                        |
| Dimension        | L188 x W105 x H204 (D104 / A50) (mm) | Standard Finish      | White, Black, White + Black |
| Adjustability    | Tilttable                            | Optional Accessories | Honeycomb                   |
| Rotation         | Non Adjustable                       |                      |                             |
| Fixture Material | Extruded Aluminium                   |                      |                             |

## ELECTRICAL CHARACTERISTICS

|                        |                     |                        |                              |
|------------------------|---------------------|------------------------|------------------------------|
| LED Power              | 15W                 | Dimming Options        | NON-DIM, PHASE, 1-10V, DALI  |
| LED Luminous Flux      | 1200lm              | Power Factor           | 0.9                          |
| Chromaticity Tolerance | SDCM≤3              | UGR                    | <22                          |
| Color Rendering Index  | >80/90              | Driver Options         | LYTEMASTER, TRIDONIC, HELVAR |
| Color Temperature      | 3000K, 4000K, 6000K | Extended Configuration | 2700K, 5000K                 |
| Beam Angle             | 10°/20°/30°         | Options On Request     | Bluetooth                    |

## PRODUCT SPECIFICATION

|               |          |                        |               |
|---------------|----------|------------------------|---------------|
| Mains Volatge | 220-240V | Environmental Temp     | -20°C ~ +40°C |
| Frequency     | 50/60 Hz | Rated Service Life (h) | 55,000        |
| Safety Class  | III      | Certification          | TUV, CE, RoHS |

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.