

ANLOCK RD III

SPOT DOWN SERIES



Model No: LM-C03-ANR3TP-20W**


DESCRIPTION

Bigger size and larger volume provide maximum luminous flux to meet higher and larger space lighting requirements. A variety of different trims and reflectors make the space more harmonious


AREAS OF APPLICATION

- Hotels • Residences • Shopping malls
- Semi Outdoor Spaces • Wet Areas Requiring Anti Fogging.

DIAGRAM

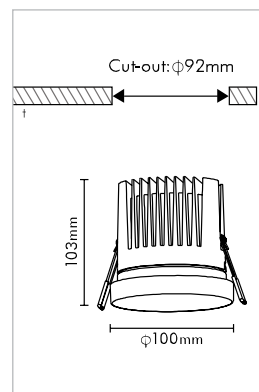

MODEL NUMBER SELECTION

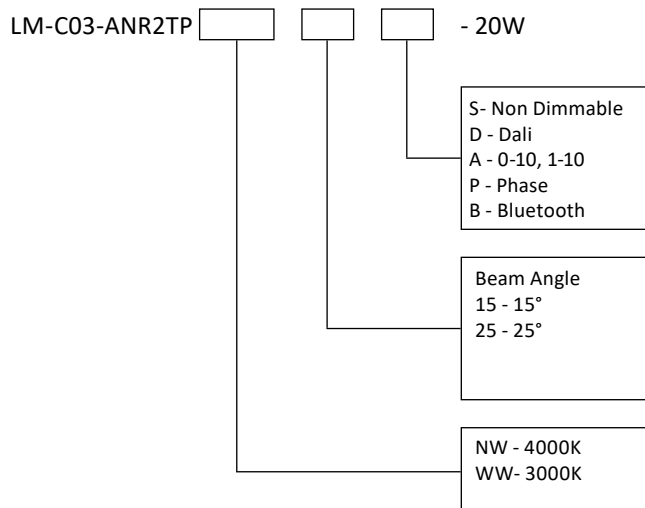

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

20W 15° 3000K Ra90			20W 25° 3000K Ra90		
H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)
1	8105	0.32	1	4899	0.48
2	2026	0.63	2	1225	0.96
3	901	0.95	3	544	1.43
4	507	1.26	4	306	1.91
5	324	1.58	5	196	2.39
HEIGHT	ILLUMINANCE	DIAMETER	HEIGHT	ILLUMINANCE	DIAMETER

PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP54
Cut-Out Size	92 (mm)	IK-Rating	IK03
Dimension	D100 x H103 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black
Reflector	White / Black / Gold	Optional Accessories	Trim with sprin

ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	500mA	Beam Angle	15°/25°
LED Voltage	36V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	18W	Power Factor	0.9W
System Power	20W	UGR	<19
LED Luminous Flux	1415~1459 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.