

SWIZZ IV

SPOT DOWN SERIES





Model No: LM-C04-SZ4T**-12W


DESCRIPTION

The high power round fixed design can help you accurately project light onto object, highlighting individual area or object


AREAS OF APPLICATION

- Hotels Clubs Bars Restaurants Conference Centers
- Residences Shopping Malls

DIAGRAM



MODEL NUMBER SELECTION

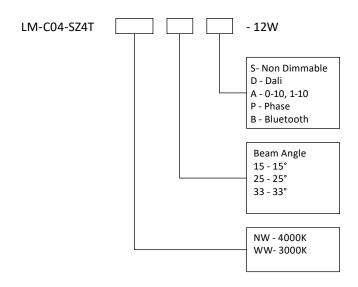



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

12W -	15° 3000K	Ra90	12W 25° 3000K Ra90			12W 33° 3000K Ra90		
H(m)	E(Ix)	D(m)	H(m)	E(Ix)	D(m)	H(m)	E(Ix)	D(m)
1	47 <mark>4</mark> 3	0.30	1	38 <mark>4</mark> 5	0.45	1	2 <mark>61</mark> 7	0.59
2	1 <mark>18</mark> 6	0.60	2	961	0.90	2	654	1.18
3	527	0.90	3	427	1.34	3	291	1.78
4	297	1.20	4	240	1.79	4	164	2.37
5	190	1.50	5	154	2.24	5 <	105	2.96
HEIGHT	ILLUMINANCE	DIAMETER	HEIGHT	ILLUMINANCE	DIAMETER	HEIGHT	ILLUMINANCE	DIAMETER

PHYSICAL CHARACTERISTICS

Recessed	Rotation	Rotatable
Remote	IP-Rating	IP20
80 (mm)	IK-Rating	IK03
D89 x H109 (mm)	Fixture Material	Die Cast Aluminium
Tilt +/-20°	Standard Finish	White / Black
White / Black / Gold	Optional Accessories	Trim with sprin
ELECTRICA	L CHARACTERISTICS	
Citizen	Color Temperature	3000K, 4000K
350mA	Beam Angle	15°/25°/33°
31V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
10.9W	Power Factor	0.9W
12W	UGR	<19
782~917 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
SDCM≤3	Extended Configuration	2700K, 5000K
>80/90	Options On Request	Bluetooth
PRODUC	CT SPECIFICATION	
220-240V	Environmental Temp	-20°C ~ +40°C
50/60 Hz	Rated Service Life (h)	55,000
II	Certification	TUV, CE, RoHS
	Remote 80 (mm) D89 x H109 (mm) Tilt +/-20° White / Black / Gold ELECTRICA Citizen 350mA 31V 10.9W 12W 782~917 lm SDCM≤3 >80/90 PRODUC 220-240V 50/60 Hz	Remote IP-Rating 80 (mm) IK-Rating D89 x H109 (mm) Fixture Material Tilt +/-20° Standard Finish White / Black / Gold Optional Accessories ELECTRICAL CHARACTERISTICS Citizen Color Temperature 350mA Beam Angle 31V Dimming Options 10.9W Power Factor 12W UGR 782~917 lm Driver Options SDCM≤3 Extended Configuration >80 (mm) IK-Rating Poptional Accessories PRODUCT SPECIFICATION Environmental Temp S0/60 Hz Rated Service Life (h)

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.