
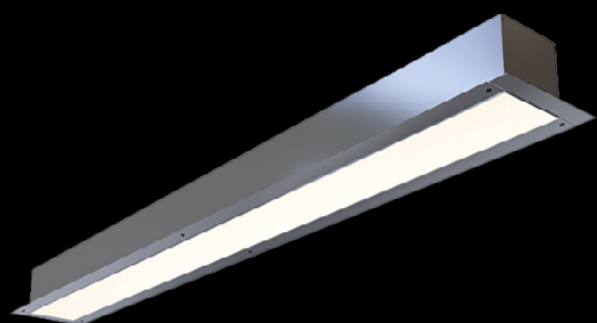


# VEGA

PROFILE SERIES



**Model No: LM-011-V35L4\*\*-20W**

## TECHNICAL DESCRIPTION

Compatible in creating and customizing multiple geometric designs, Being capable of offering seamless connectivity of the diffuser and Micro Prismatic PMMA diffuser as optional, this luminaire meets all design requirements.


## INSTALLATION

Recessed

## AREAS OF APPLICATION

• Villas • Office • Reception

## DIAGRAM

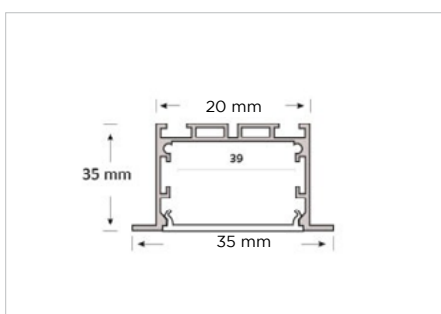


## MODEL NUMBER SELECTION

LM-011-V35L4   -20W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase  
B - Bluetooth

CW - 6000K  
NW - 4000K  
WW - 3000K

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

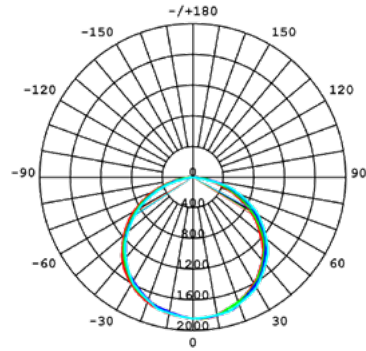

## PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Integrated	IP-Rating	IP40
Cut-Out Size	1190 x 50 (mm)	IK-Rating	IK03
Dimension	L1200 x W35 x H35 (mm)	Fixture Material	Extruded Anodized Aluminium with PC end cap cover
Adjustability	Fixed	Standard Finish	White, Black, White+Black
Reflector	PMMA / Polycarbonate Shock Proof	Optional Accessories	N/A

## ELECTRICAL CHARACTERISTICS

LED Current	550mA	Beam Angle	120°
LED Voltage	36V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	20W	Power Factor	0.9
System Power	19.8W	UGR	<22
LED Luminous Flux	2000lm	Driver Options	LYTEMASTER, TRIDONIC, VOSSLOH SCHWABE
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>85	Options On Request	Bluetooth
Color Temperature	3000K, 4000K, 6000K		

## PRODUCT SPECIFICATION

Mains Volatge	AC 85- 265V, DC 24V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.