

# ZESTA III

FOCUS & SPIKE



**Model No: LM-B03-ZSA2\*\*-30W**

## TECHNICAL DESCRIPTION

Special housing design and high-quality optical components specifically for demanding visual tasks to provide enhanced visual comfort. Discreet and compact aesthetically designed architectural outdoor spotlight, Ideal for Glare-Free Accent Lighting, Flood lighting and Wall washing in Outdoor Area.


## INSTALLATION

Floor/ Wall mounted, Spike mounted, Tree or Pole mounted

## AREAS OF APPLICATION

• Facade • Garden • Focus Light

## DIAGRAM

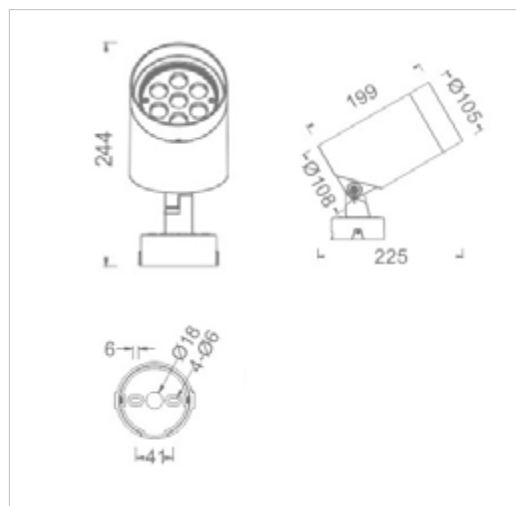

## MODEL NUMBER SELECTION

LM-B03-ZSA2    - 30W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase  
DMX-DMX512/RDM

Beam Angle  
10-10° 55-55°  
15-15° 28\*38-28\*38°  
25-25° 15\*50-15\*50°  
30-30° 20\*45-20\*45°

CW - 6000K  
NW - 4000K  
WW- 3000K  
RGBW-RGBW

## PHYSICAL CHARACTERISTICS

|               |                               |                      |  |
|---------------|-------------------------------|----------------------|--|
| Installation  | Surface, Pole, Spike          | IP-Rating            | IP66                                       |
| Driver        | Integrated                    | IK-Rating            | IK04                                       |
| Dimension     | D: 105, L: 199, H: 244 (mm)   | Fixture Material     | Die Cast Aluminium                         |
| Adjustability | Vertical Tilttable            | Standard Finish      | Silver, Black                              |
| Diffuser      | Tempered Glass                | Optional Accessories | Mounting Brackets, Spike, Honey Comb, Hood |
| Rotation      | Mounting Plate rotatable 355° |                      |  |

## ELECTRICAL CHARACTERISTICS

|                        |                     |                        |   |
|------------------------|---------------------|------------------------|---|
| Light Source           | Bridgelux           | Extended Configuration | 2700K, 5000K, RGBW  |
| LED Power              | 30W                 | Beam Angle             | 10°/15°/25°/30°/45°/55°<br>28°/38°/15°/50°/20°/45°                            |
| LED Luminous Flux      | 2400lm-2550lm       | Dimming Options        | NON-DIM, PHASE, 1-10V, DALI, DMX512/RDM                                       |
| Chromaticity Tolerance | SDCM≤3              | Driver Options         | LYTEMASTER, TRIDONIC, HELVAR  |
| Color Rendering Index  | >80/90              | Options On Request     | Filters, Diffusers, Honeycomb louvers, Refractor for elliptical distribution. |
| Color Temperature      | 3000K, 4000K, 6000K |                        |   |

## PRODUCT SPECIFICATION

|               |          |                        |               |
|---------------|----------|------------------------|---------------|
| Mains Voltage | DC24V    | Environmental Temp     | -20°C ~ +40°C |
| Frequency     | 50/60 Hz | Rated Service Life (h) | 55,000        |
| Safety Class  | II       | Certification          | CE, RoHS      |

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.