

SWIZZ II

SPOT DOWN SERIES



Model No: LM-C04-SZ2TL-8W**


DESCRIPTION

Small size and high power adjustable design can help you accurately project light onto objects, highlighting a single area or object.


AREAS OF APPLICATION

- Hotels • Clubs • Bars • Restaurants • Conference Centers
- Residences • Shopping Malls


DIAGRAM

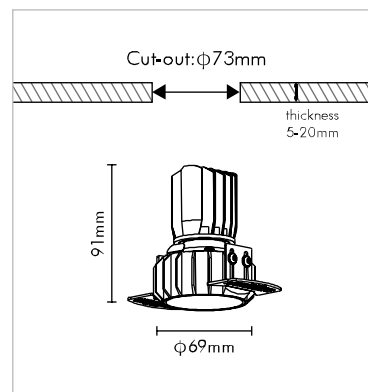

MODEL NUMBER SELECTION

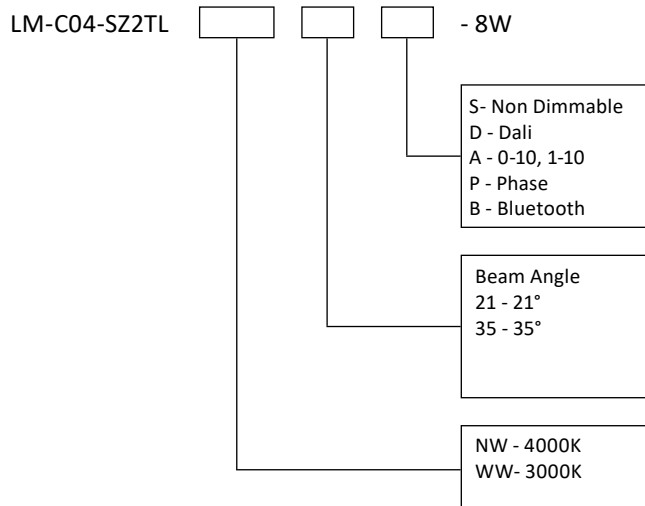

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

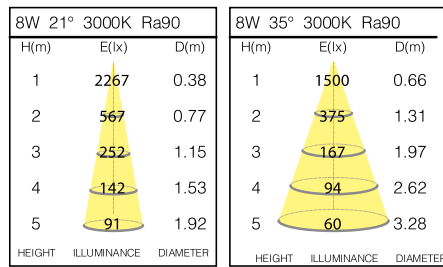

PHYSICAL CHARACTERISTICS

| | | | |
|---------------|----------------------|----------------------|--------------------|
| Installation | Recessed | Rotation | Rotatable |
| Driver | Remote | IP-Rating | IP20 |
| Cut-Out Size | 73 (mm) | IK-Rating | IK03 |
| Dimension | D69 x H91 (mm) | Fixture Material | Die Cast Aluminium |
| Adjustability | Tilt +/-20° | Standard Finish | White / Black |
| Reflector | White / Black / Gold | Optional Accessories | Trim with sprin |

ELECTRICAL CHARACTERISTICS

| | | | |
|------------------------|------------|------------------------|------------------------------|
| Light Source | Citizen | Color Temperature | 3000K, 4000K |
| LED Current | 200mA | Beam Angle | 21°/35° |
| LED Voltage | 36V | Dimming Options | NON-DIM, PHASE, 1-10V, DALI |
| LED Power | 7.2W | Power Factor | 0.9W |
| System Power | 8W | UGR | <19 |
| LED Luminous Flux | 518~526 lm | Driver Options | LYTEMASTER, TRIDONIC, HELVAR |
| Chromaticity Tolerance | SDCM≤3 | Extended Configuration | 2700K, 5000K |
| Color Rendering Index | >80/90 | Options On Request | Bluetooth |

PRODUCT SPECIFICATION

| | | | |
|---------------|----------|------------------------|---------------|
| Mains Volatge | 220-240V | Environmental Temp | -20°C ~ +40°C |
| Frequency | 50/60 Hz | Rated Service Life (h) | 55,000 |
| Safety Class | II | Certification | TUV, CE, RoHS |

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.