




## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

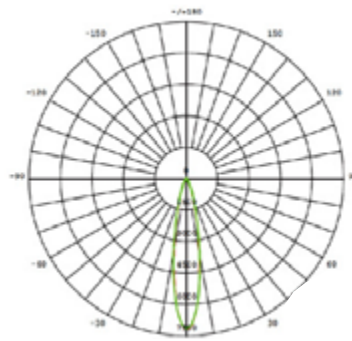

## PHYSICAL CHARACTERISTICS

Installation	Surface	IP-Rating	IP67
Driver	Integrated	IK-Rating	IK08
Dimension	L1000 x W43 x H49 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	Grey, Black
Diffuser	Tempered Glass	Optional Accessories	N/A
Rotation	Fixed		

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux, LUXEON	Beam Angle	120°
LED Power	15W	Dimming Options	NON-DIM, 1-10V, DALI, DMX512
LED Luminous Flux		Power Factor	0.9
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, MEANWELL
Color Rendering Index	≥80/90	Options On Request	Honey comb Louver, Anti Glare Shield
UGR	<22		
Color Temperature	2700K-6000K, RGB, RGBW		

## PRODUCT SPECIFICATION

Input Volatge	DC 24V	Environmental Temp	-25°C ~ +50°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.