
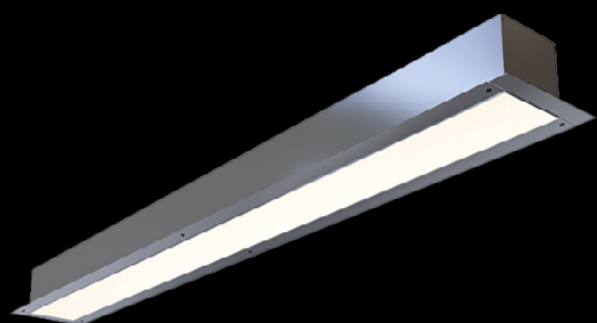


VEGA

PROFILE SERIES



Model No: LM-011-RLL3-30W**

TECHNICAL DESCRIPTION

Compatible in creating and customizing multiple geometric designs, Being capable of offering seamless connectivity of the diffuser and Micro Prismatic PMMA diffuser as optional, this luminaire meets all design requirements.


INSTALLATION

Recessed

AREAS OF APPLICATION

• Villas • Office • Reception

DIAGRAM

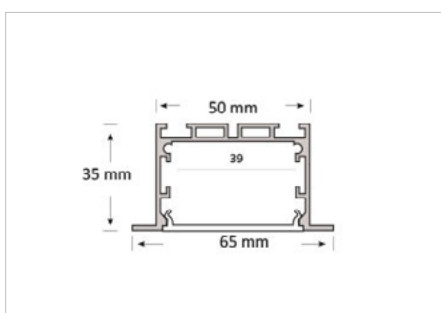


MODEL NUMBER SELECTION

LM-011-RLL3 -30W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase
B - Bluetooth

CW - 6000K
NW - 4000K
WW - 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

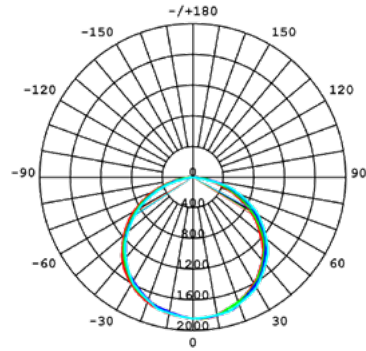

PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Integrated	IP-Rating	IP40
Cut-Out Size	890 x 50 (mm)	IK-Rating	IK03
Dimension	L900 x W65 x H35 (mm)	Fixture Material	Extruded Anodized Aluminium with PC end cap cover
Adjustability	Fixed	Standard Finish	White, Black, White+Black
Reflector	PMMA / Polycarbonate Shock Proof	Optional Accessories	N/A

ELECTRICAL CHARACTERISTICS

LED Current	700mA	Beam Angle	120°
LED Voltage	42V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	30W	Power Factor	0.9
System Power	29.4W	UGR	<22
LED Luminous Flux	4000lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>85	Options On Request	Bluetooth
Color Temperature	3000K, 4000K, 6000K		

PRODUCT SPECIFICATION

Mains Volatge	AC 85- 265V, DC 24V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.