


# ELITE

SURFACE & FACADE LUMINAIRES



**Model No: LM-002-IGWW1\*\*-24W**

## TECHNICAL DESCRIPTION

Surface mounted with accessory brackets, Extruded aluminium alloy body, surface with anodizing treatment, high strength toughened glass, DMX512 interface adopts high reliable bus connect.


## INSTALLATION

Surface mounted with available brackets.


## AREAS OF APPLICATION

- Wall Washer • Uplight


## DIAGRAM

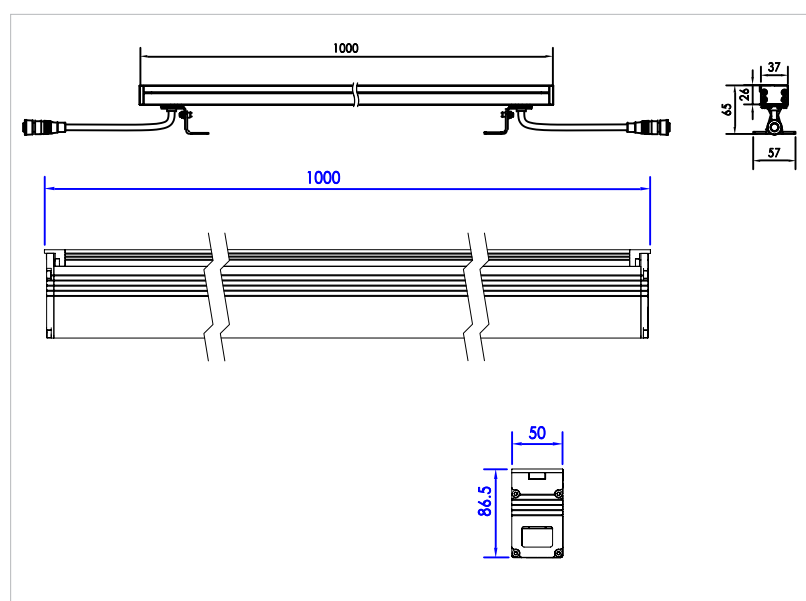

## MODEL NUMBER SELECTION

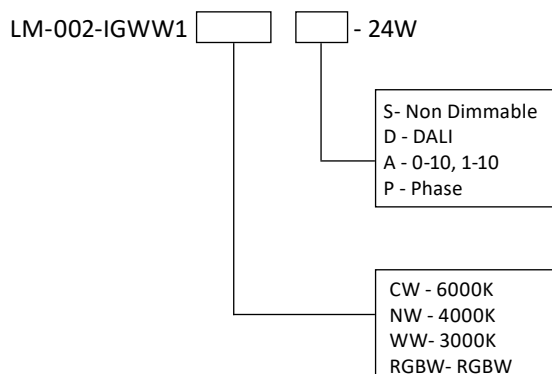

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

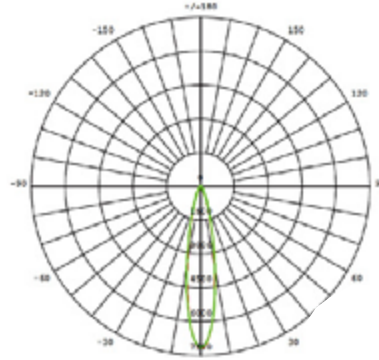

## PHYSICAL CHARACTERISTICS

Installation	Surface	IP-Rating	IP66
Driver	Integrated	IK-Rating	IK08
Dimension	L1000 x W65 x H57 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	Grey, Black
Diffuser	Tempered Glass		
Rotation	180° On Clamp		

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux, LUXEON	Beam Angle	20°/30°/45°/60°/25°x45°
LED Power	24W	Dimming Options	NON-DIM, 1-10V, DALI, DMX512
LED Luminous Flux	2040lm	Power Factor	0.9
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, MEANWELL
Color Rendering Index	≥70/80	Extended Configuration	2700K, 5000K
UGR	<22	Options On Request	Honey comb Louver, Anti Glare Shield
Color Temperature	3000K, 4000K, 6000K, RGB		

## PRODUCT SPECIFICATION

Input Volatge	DC24V	Environmental Temp	-25°C ~ +50°C
Frequency	50/60 Hz	Ambient Humidity	10% ~ 90%
Safety Class	II	Rated Service Life (h)	55,000
		Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.