

# ZPOTO A24

SPOT DOWN SERIES



**Model No: LM-C02-ZPTA24\*\*-72W**


## DESCRIPTION

Nice exterior appearance, 24 heads round integrated design, easy installation. 23mm light outlet diameter, which can hide the lamp perfectly and realize the effect of seeing light but not seeing lighting source. At the same time, it can be integrated as part of the ceiling decoration.

## AREAS OF APPLICATION

- Showrooms • Restaurants • Star-rated
- Hotels • Villas • Residential Buildings

## DIAGRAM

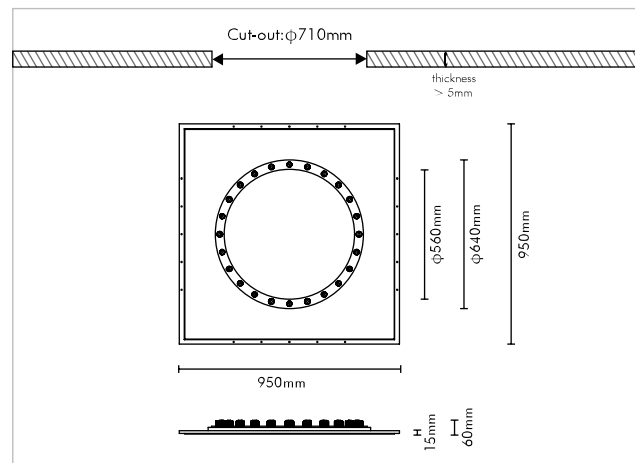

## MODEL NUMBER SELECTION


LM-C02-ZPTA24    - 72W

S - Non Dimmable  
D - Dali  
A - 0-10, 1-10  
P - Phase  
B - Bluetooth

Beam Angle  
15° - 15°  
24° - 24°  
34° - 34°

NW - 4000K  
WW - 3000K

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

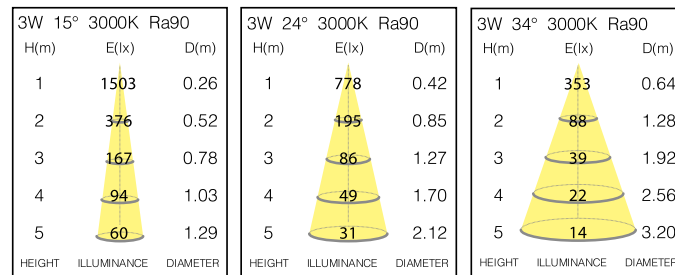

## PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP20
Cut-Out Size	76 (mm)	IK-Rating	IK03
Dimension	D136 x H88 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black
Reflector	Black	Optional Accessories	Exit panel

## ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	700mA	Beam Angle	15°/24°/34°
LED Voltage	3V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	3W x 24	Power Factor	0.9W
System Power	2.5W x 24	UGR	<13
LED Luminous Flux	3648~3768 lm, 4008~4104 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	Bluetooth

## PRODUCT SPECIFICATION

Mains Voltage	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.