


WASSER RD

UNDERWATER SERIES



Model No: LM-202-WASU2-72W**

TECHNICAL DESCRIPTION

Extruded aluminium alloy body, surface with anodizing treatment, high strength toughened glass, DMX512 interface adopts high reliable bus connect.


INSTALLATION

Recessed

AREAS OF APPLICATION

• Swimming Pools • Water Feature

DIAGRAM

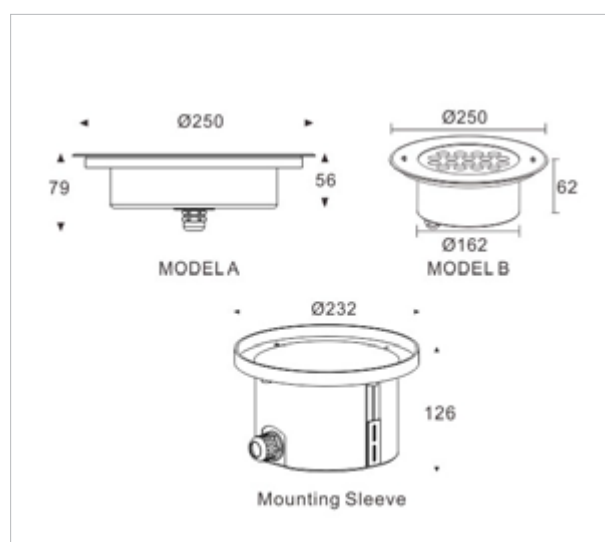

MODEL NUMBER SELECTION

LM-202-WASU2 -72W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase
DMX-DMX512

Beam Angle
15 - 15°
30 - 30°
45 - 45°
60 - 60°
45/35-45/35°

CW - 6000K
NW - 4000K
WW- 3000
RGB-RGBW

PHYSICAL CHARACTERISTICS

Installation	Recessed
Driver	Integrated
Cut-out	232x126 (+3mm)
Dimension	D250 x H79 (mm)
Adjustability	Fixed
Diffuser	Tempered Glass

IP-Rating	IP68
IK-Rating	IK08
Rotation	Fixed
Fixture Material	316 Chrome Plated Stainless Steel
Standard Finish	Stainless Steel
Optional Accessories	N/A

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux
LED Power	18x4W
LED Luminous Flux	5760lm
Chromaticity Tolerance	SDCM≤3
Color Rendering Index	≥85
UGR	<22
Color Temperature	RGBW

Beam Angle	15°, 30°, 45°, 60°
Dimming Options	NON-DIM, 1-10V, DALI, DMX512
Power Factor	0.9
Driver Options	LYTEMASTER / MEANWELL / TRIDONIC
Options On Request	N/A

PRODUCT SPECIFICATION

Mains Volatge	DC24V
Frequency	50/60 Hz
Safety Class	II

Environmental Temp	-25°C ~ +50°C
Rated Service Life (h)	55,000
Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.