

ZESTA III

FOCUS & SPIKE



Model No: LM-B03-ZSA2-26W**

TECHNICAL DESCRIPTION

Special housing design and high-quality optical components specifically for demanding visual tasks to provide enhanced visual comfort. Discreet and compact aesthetically designed architectural outdoor spotlight, Ideal for Glare-Free Accent Lighting, Flood lighting and Wall washing in Outdoor Area.


INSTALLATION

Floor/ Wall mounted, Spike mounted, Tree or Pole mounted

AREAS OF APPLICATION

• Facade • Garden • Focus Light

DIAGRAM

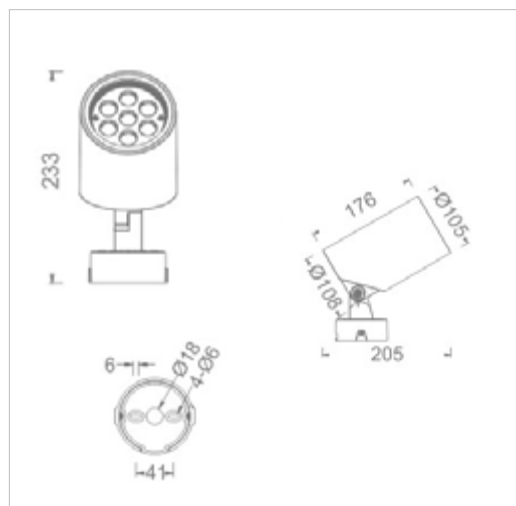

MODEL NUMBER SELECTION

LM-B03-ZSA2 - 26W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase
DMX-DMX512/RDM

Beam Angle
10-10° 55-55°
15-15° 28*38-28*38°
25-25° 15*50-15*50°
30-30° 20*45-20*45°

CW - 6000K
NW - 4000K
WW- 3000K
RGBW-RGBW

PHYSICAL CHARACTERISTICS

Installation	Surface, Pole, Spike	IP-Rating	IP66
Driver	Integrated	IK-Rating	IK04
Dimension	D: 105, L: 176, H: 233 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Vertical Tilttable	Standard Finish	Silver, Black
Diffuser	Tempered Glass	Optional Accessories	Mounting Brackets, Spike, Honey Comb, Hood
Rotation	Mounting Plate rotatable 355°		

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Extended Configuration	2700K, 5000K, RGBW
LED Power	26W	Beam Angle	10°/15°/25°/30°/45°/55° 28°/38°/15°/50°/20°/45°
LED Luminous Flux	1950lm-2080lm	Dimming Options	NON-DIM, PHASE, 1-10V, DALI, DMX512/RDM
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Rendering Index	>80/90	Options On Request	Filters, Diffusers, Honeycomb louvers, Refractor for elliptical distribution.
Color Temperature	3000K, 4000K, 6000K		

PRODUCT SPECIFICATION

Mains Voltage	AC110V AC220V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.