

# ZESTA III

FOCUS & SPIKE



**Model No: LM-B03-ZSA2\*\*-22W**

## TECHNICAL DESCRIPTION

Special housing design and high-quality optical components specifically for demanding visual tasks to provide enhanced visual comfort. Discreet and compact aesthetically designed architectural outdoor spotlight, Ideal for Glare-Free Accent Lighting, Flood lighting and Wall washing in Outdoor Area.


## INSTALLATION

Floor/ Wall mounted, Spike mounted, Tree or Pole mounted

## AREAS OF APPLICATION

• Facade • Garden • Focus Light

## DIAGRAM

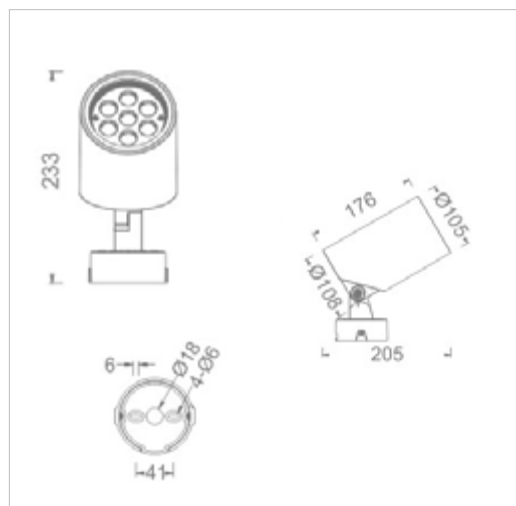

## MODEL NUMBER SELECTION

LM-B03-ZSA2    - 22W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase  
DMX-DMX512/RDM

Beam Angle  
10-10° 55-55°  
15-15° 28\*38-28\*38°  
25-25° 15\*50-15\*50°  
30-30° 20\*45-20\*45°

CW - 6000K  
NW - 4000K  
WW- 3000K  
RGBW-RGBW

## PHYSICAL CHARACTERISTICS

Installation	Surface, Pole, Spike	IP-Rating	IP66
Driver	Integrated	IK-Rating	IK04
Dimension	D: 105, L: 176, H: 233 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Vertical Tilttable	Standard Finish	Silver, Black
Diffuser	Tempered Glass	Optional Accessories	Mounting Brackets, Spike, Honey Comb, Hood
Rotation	Mounting Plate rotatable 355°		

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Extended Configuration	2700K, 5000K, RGBW
LED Power	22W	Beam Angle	10°/15°/25°/30°/45°/55° 28°/38°/15°/50°/20°/45°
LED Luminous Flux	1760lm-1870lm	Dimming Options	NON-DIM, PHASE, 1-10V, DALI, DMX512/RDM
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Rendering Index	>80/90	Options On Request	Filters, Diffusers, Honeycomb louvers, Refractor for elliptical distribution.
Color Temperature	3000K, 4000K, 6000K		

## PRODUCT SPECIFICATION

Mains Voltage	AC110V AC220V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.