

# ONYX

BULKHEAD & WALL LIGHT



**Model No: LM-011-UDLL1\*\*-8W**


## INSTALLATION

Suitable for ceiling or wall installation with 4 fixing points.  
Approved for indoor use or in outdoor areas, protected by a roof.


## AREAS OF APPLICATION

- Supplementary lighting, for Indoor and Outdoor


## DIAGRAM

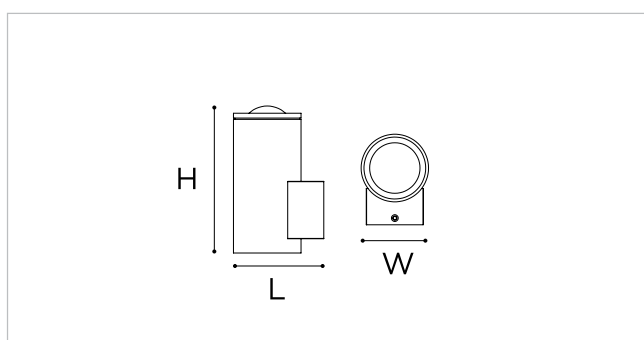

## MODEL NUMBER SELECTION

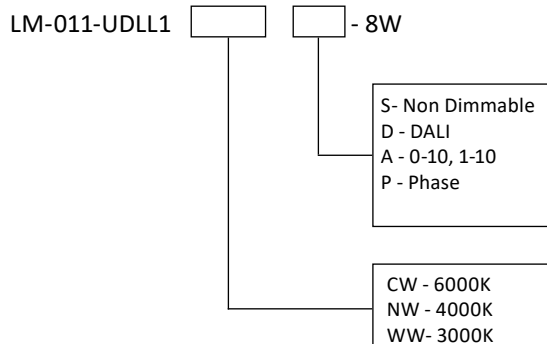

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

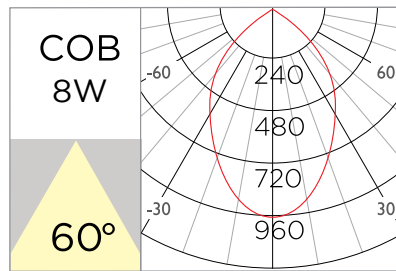

## PHYSICAL CHARACTERISTICS

Installation	Wall Mounted	IP-Rating	IP65
Driver	Integrated	IK-Rating	IK10
Dimension	L99 x W75 x H146 mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White, Black
Lens	PMMA	Optional Accessories	N/A
Rotation	Non Adjustable		

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Beam Angle	90°
LED Power	8W	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Luminous Flux	560lm	Power Factor	0.9
Chromaticity Tolerance	SDCM≤3	UGR	<13
Color Rendering Index	>80/90	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Temperature	3000K, 4000K, 6000K	Extended Configuration	2700K, 5000K
Beam Angle	Adjustable	Options On Request	N/A

## PRODUCT SPECIFICATION

Mains Volatge	85-265V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.