


ASTRIX

SOLAR STREET LIGHTS

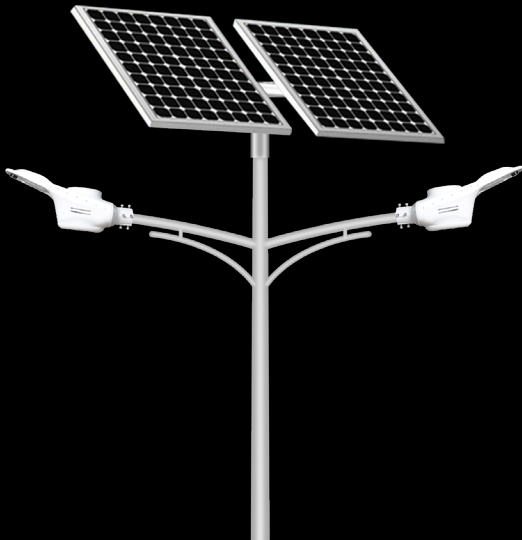

Model No: LM-002-SST5-120W**

TECHNICAL DESCRIPTION

All in One Solar Street light, 100% Powered by solar, Auto On/Off mode, with a back up of 2 rainy days. With built in LiFePO4 Lithium battery with BMS system. With MPPT control and easy installation, No digging, no trenching and save more on labour cost.


INSTALLATION

Pole/Post Mounted, Side Mounted

AREAS OF APPLICATION

• Street Light • Road Light • Area Lighting

DIAGRAM

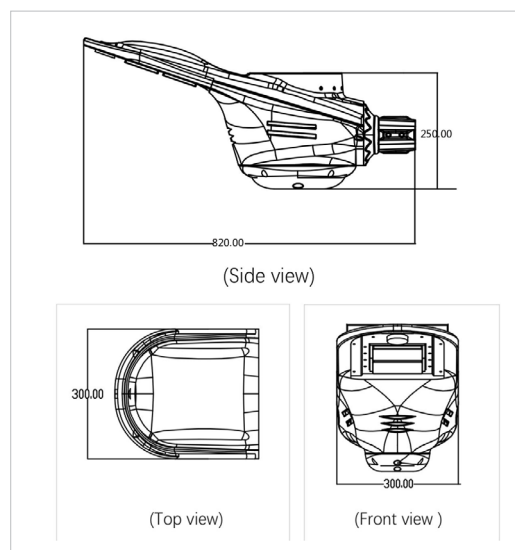


MODEL NUMBER SELECTION

LM-002-SST5 - 120W

CW - 6000K
NW - 4000K
WW - 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PHYSICAL CHARACTERISTICS

Installation	Pole Mounted & Side Mounted	IP-Rating	IP66
Product Dimension	B300 x L800 x H250	IK-Rating	IK10
Adjustability	90°	Solar Panel Size	331 x 1950 (mm)
Diffuser	Tempered Glass	Installation Height	11-12m
Standard Finish	Grey, White, Black	Rotation	Adjustable
Fixture Material	Die Cast Aluminium	Optional Accessories	N/A

ELECTRICAL CHARACTERISTICS

Wattage	120W	ON	Instant light ON
LED Luminous Flux	15600lm	OFF	Instant light OFF
Solar Panel	170W 18V	Light Control	100% 2hr 70% 2hr 20% till dawn
LiFePO4 battery	57AH 12.8V	Time Control	50% 1hr 100% 4hr 50% 3hr 25% 4hr
Color Rendering Index	>70	Super Brightness	100% 6hr 50% 6hr
Color Temperature	3000K, 4000K, 6000K	Microwave Control	100% object move closer 30% object move away
Beam Angle	60°/90°/T2/T3	Time + Microwave Control	100% 2hr 70% 2hr 50% 2hr 50% object move closer 20% object move away
UGR	>22	-20%	Decrease 20% brightness based on original working mode
Driver Options	LYTEMASTER, TRIDONIC, MEAN WELL	+20%	Increase 20% brightness based on original working mode

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	50,000
Safety Class	III	Certification	TUV, CE, RoHS
Autonomy	2 Days	Solar Charging	5-7hrs

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.