

TRODDEN

TRACK SYSTEM



Model No: LM-010-TLR8-20W**

TECHNICAL DESCRIPTION

Single head square design, Its solid appearance can provide more luminous flux. It can be rotated 355° horizontally and 90° vertically. Tunable White allows the colour temperature to be continuously adjusted from warm light to cool light.


INSTALLATION

Track Mounted

AREAS OF APPLICATION

• Hotel • Restaurant • Shopping Mall • Stores • Household

DIAGRAM

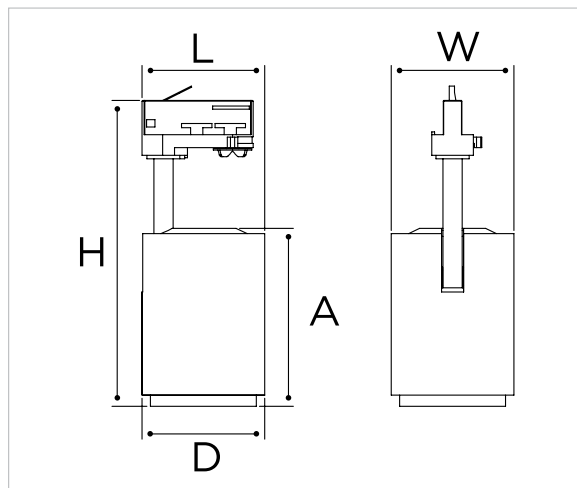


MODEL NUMBER SELECTION

LM-010-TLR8 - 20W

S- Non Dimmable
D - Dali
A - 0-10, 1-10
P - Phase
B - Bluetooth

CW - 6000K
NW - 4000K
WW - 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

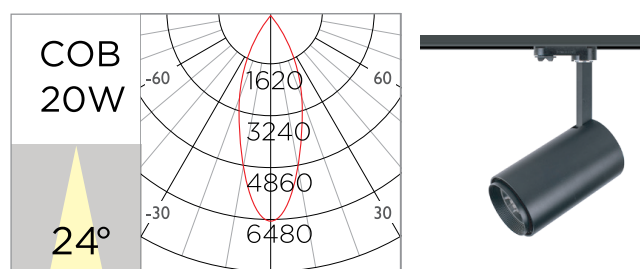

PHYSICAL CHARACTERISTICS

Installation	Track Mounted	IP-Rating	IP20
Driver	Built In Driver	IK-Rating	IK03
Dimension	L95 x W95 x H237 (D95 / A138) (mm)	Standard Finish	White, Black
Adjustability	90° Adjustable Vertical	Optional Accessories	Honeycomb
Rotation	355° on Adapter	Track Adapter	Adaptive to 2 wires, 3 wires, 4 wires tracks
Fixture Material	Die Cast Aluminium		

ELECTRICAL CHARACTERISTICS

LED Power	20W	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Luminous Flux	1700lm	Power Factor	0.9
Chromaticity Tolerance	SDCM≤3	UGR	<22
Color Rendering Index	>80/90	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Temperature	3000K, 4000K, 6000K	Extended Configuration	2700K, 5000K
Beam Angle	15°/24°/38°	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	III	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.