



Model No: LM-C05-STZ3TL**-8W


DESCRIPTION

Accurate light control technology, every beam of light is accurately projected on the necessary place.


AREAS OF APPLICATION

• Star-Rated Hotels • Villas • Residential Buildings

DIAGRAM



MODEL NUMBER SELECTION

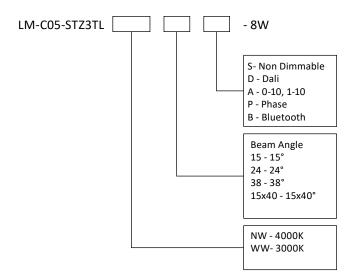



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

7W 15	° 3000K	Ra90	7W 2	0° 3000K F	Ra90	7W 25	° 3000K	Ra90	7W 30	0° 3000K F	Ra90	7W 15	5°x40° 3000	K Ra90
H(m)	E(lx)	D(m)	H(m)	E(Ix)	D(m)	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)
1	3499	0.23	1	2 <mark>67</mark> 9	0.35	1	1951	0.44	1	1469	0.57	1	1348	0.28
2	8 <mark>7</mark> 5	0.45	2	670	0.69	2	488	0.87	2	367	1.14	2	337	0.56
3	389	0.68	3	298	1.04	3	217	1.31	3	163	1.70	3	150	0.85
4	219	0.90	4	168	1.39	4	122	1.74	4	92	2.27	4	84	1.13
5	140	1.13	5	107	1.73	5	78	2.18	5	59	2.84	5	54	1.41
HEIGHT	ILLUMINANCE	DIAMETER	HEIGHT	ILLUMINANCE	DIAMETER	HEIGHT	ILLUMINANCE	DIAMETER	HEIGHT	ILLUMINANCE	DIAMETER	HEIGHT	ILLUMINANCE	DIAMETER

PHYSICAL CHARACTERISTICS

1111313772	HARACIERISTICS	
Recessed	Rotation	Non Adjustable
Remote	IP-Rating	IP20/IP54
78 (mm)	IK-Rating	IK03
D110 x H95 (mm)	Fixture Material	Die Cast Aluminium
Fixed	Standard Finish	White / Black
Specular/Dark Chrome/White/ Golden / Black	Optional Accessories	Honeycomb/Glass/ Trim with spring
ELECTRICAL (CHARACTERISTICS	
Citizen	Color Temperature	3000К, 4000К
250mA	Beam Angle	15°/24°/38°/15x40°
31V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
7.7W	Power Factor	0.5W
8W	UGR	<13
621~671 lm, 642~693 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
SDCM≤3	Extended Configuration	2700K, 5000K
>80/90	Options On Request	Bluetooth
PRODUCT	SPECIFICATION	
220-240V	Environmental Temp	-20°C ~ +40°C
50/60 Hz	Rated Service Life (h)	55,000
II	Certification	TUV, CE, RoHS
	Recessed Remote 78 (mm) D110 x H95 (mm) Fixed Specular/Dark Chrome/White/ Golden / Black ELECTRICAL (Citizen 250mA 31V 7.7W 8W 621~671 Im, 642~693 Im SDCM≤3 >80/90 PRODUCT 220-240V 50/60 Hz	Recessed Rotation Remote IP-Rating 78 (mm) IK-Rating D110 x H95 (mm) Fixture Material Fixed Standard Finish Specular/Dark Chrome/White/Golden / Black Optional Accessories ELECTRICAL CHARACTERISTICS Citizen Color Temperature 250mA Beam Angle 31V Dimming Options 7.7W Power Factor 8W UGR 621~671 lm, 642~693 lm Driver Options SDCM≤3 Extended Configuration >80/90 Options On Request PRODUCT SPECIFICATION 220-240V Environmental Temp Rated Service Life (h)

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.