
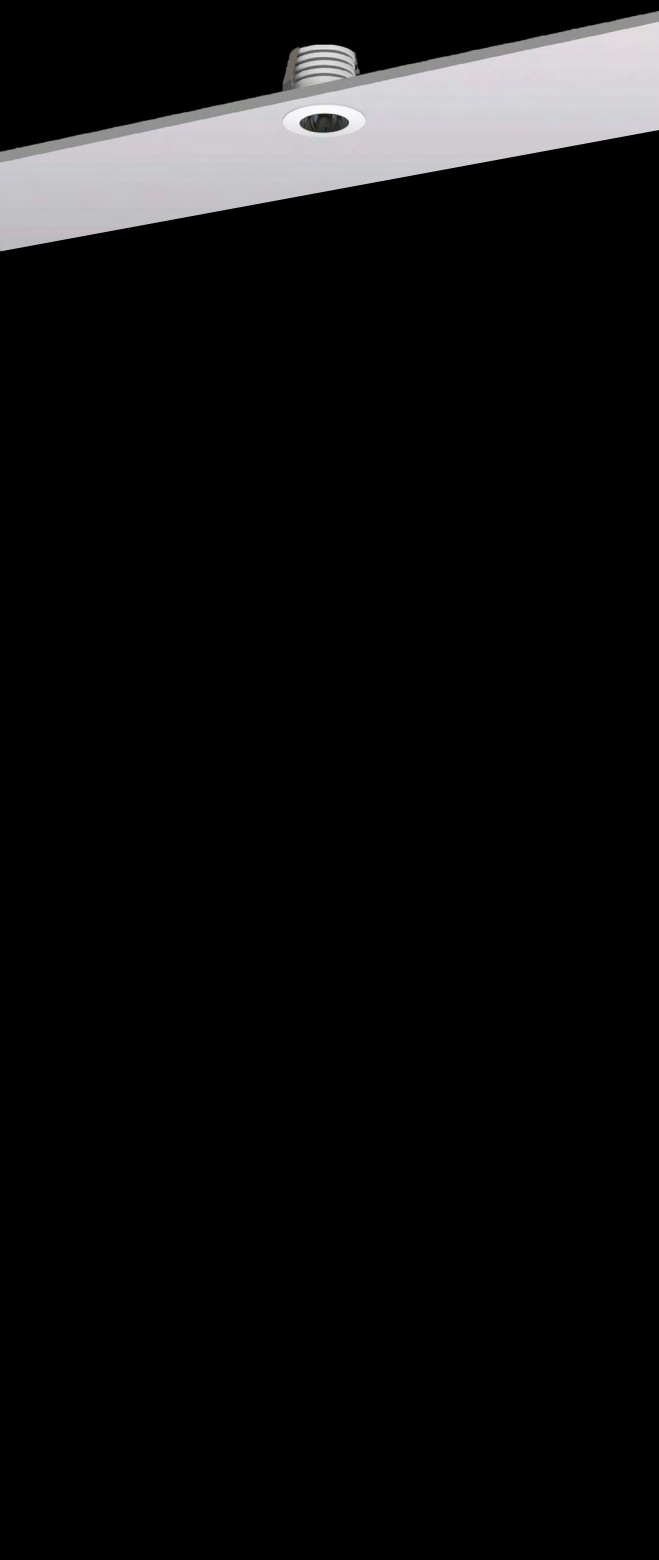


MIKRO III

SPOT DOWN SERIES



Model No: LM-C01-MIK3-3W**


DESCRIPTION

The reflector is plated with black chromium, which completely hides the light source and realizes the effect of no light in sight.


AREAS OF APPLICATION

- Showrooms • Galleries • Restaurants • Museum
- Hotels • Bars • Shopping Centers • Retail Stores


DIAGRAM

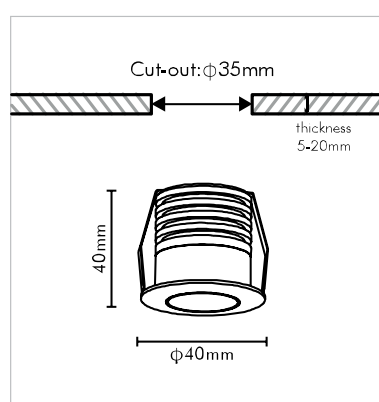

MODEL NUMBER SELECTION

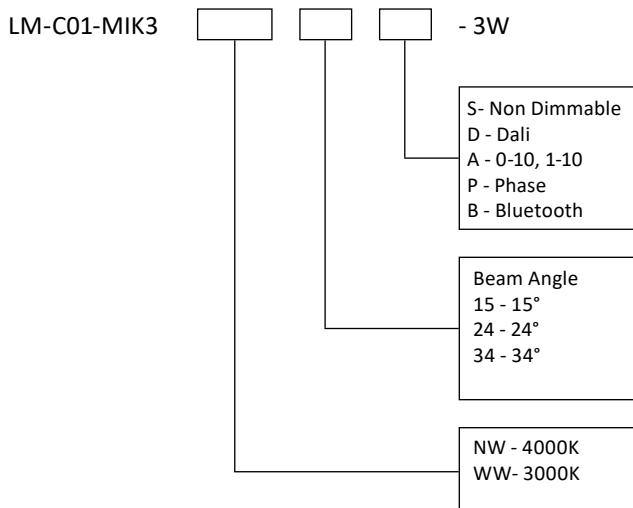

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

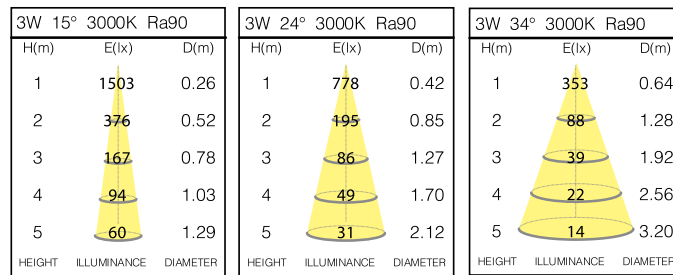

PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP20
Cut-Out Size	35 (mm)	IK-Rating	IK03
Dimension	D40 x H40 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black / Brighter
Reflector	White/Black/Chrome	Optional Accessories	Trim with spring

ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	700mA	Beam Angle	15°/24°/34°
LED Voltage	3V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	3W	Power Factor	0.9W
System Power	3.3W	UGR	<13
LED Luminous Flux	152~157 lm, 167~171 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>90	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.