
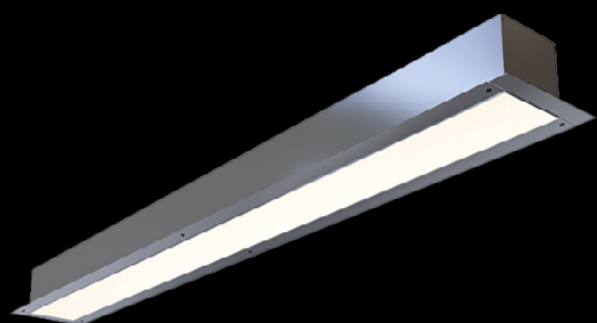


VEGA

PROFILE SERIES



Model No: LM-011-RLL4-40W**

TECHNICAL DESCRIPTION

Compatible in creating and customizing multiple geometric designs, Being capable of offering seamless connectivity of the diffuser and Micro Prismatic PMMA diffuser as optional, this luminaire meets all design requirements.


INSTALLATION

Recessed

AREAS OF APPLICATION

• Villas • Office • Reception

DIAGRAM

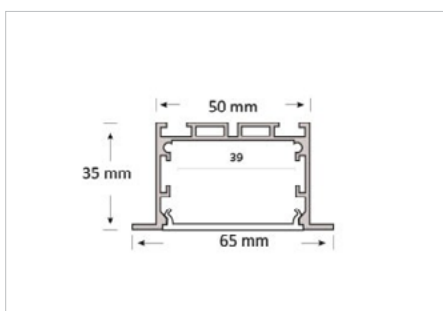


MODEL NUMBER SELECTION

LM-011-RLL4 -40W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase
B - Bluetooth

CW - 6000K
NW - 4000K
WW- 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

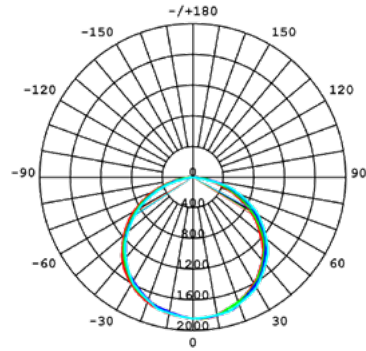

PHYSICAL CHARACTERISTICS

Installation	Recessed
Driver	Integrated
Cut-Out Size	1190 x 50 (mm)
Dimension	L1200 x W65 x H35 (mm)
Adjustability	Fixed
Reflector	PMMA / Polycarbonate Shock Proof

Rotation	Non Adjustable
IP-Rating	IP40
IK-Rating	IK03
Fixture Material	Extruded Anodized Aluminium with PC end cap cover
Standard Finish	White, Black, White+Black
Optional Accessories	N/A

ELECTRICAL CHARACTERISTICS

LED Current	900mA
LED Voltage	44V
LED Power	40W
System Power	39.6W
LED Luminous Flux	4000lm
Chromaticity Tolerance	SDCM≤3
Color Rendering Index	>85
Color Temperature	3000K, 4000K, 6000K

Beam Angle	120°
Dimming Options	NON-DIM, PHASE, 1-10V, DALI
Power Factor	0.9
UGR	<22
Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Extended Configuration	2700K, 5000K
Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	AC 85- 265V, DC 24V
Frequency	50/60 Hz
Safety Class	II

Environmental Temp	-20°C ~ +40°C
Rated Service Life (h)	55,000
Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.