

# BOLD

TRACK SYSTEM



**Model No: LM-010-TLS5\*\*-25W**

## TECHNICAL DESCRIPTION

Single head square design, Its solid appearance can provide more luminous flux. It can be rotated 355° horizontally and 90° vertically. Tunable White allows the colour temperature to be continuously adjusted from warm light to cool light.


## INSTALLATION

Track Mounted

## AREAS OF APPLICATION

• Hotel • Restaurant • Shopping Mall • Stores • Household

## DIAGRAM

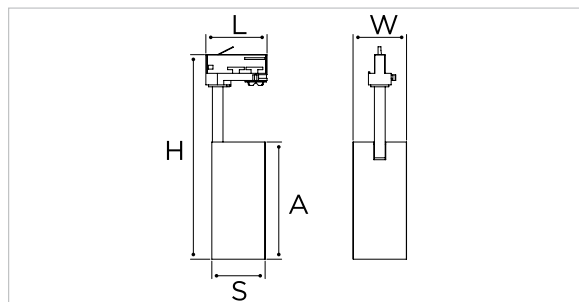

## MODEL NUMBER SELECTION

LM-010-TLS5




- 25W

S- Non Dimmable  
D - Dali  
A - 0-10, 1-10  
P - Phase  
B - Bluetooth

CW - 6000K  
NW - 4000K  
WW- 3000K

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

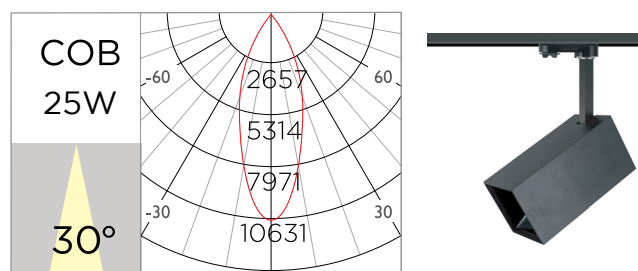

## PHYSICAL CHARACTERISTICS

|                  |                                     |                      |  |
|------------------|-------------------------------------|----------------------|--|
| Installation     | Track Mounted                       | IP-Rating            | IP20   |
| Driver           | Built In Driver                     | IK-Rating            | IK03   |
| Dimension        | L103 x W95 x H308 (S95 / A185) (mm) | Standard Finish      | White, Black                                 |
| Adjustability    | 90° Adjustable Vertical             | Optional Accessories | Honeycomb                                    |
| Rotation         | 355° on Adapter                     | Track Adapter        | Adaptive to 2 wires, 3 wires, 4 wires tracks |
| Fixture Material | Die Cast Aluminium                  |                      |  |

## ELECTRICAL CHARACTERISTICS

|                        |                     |                        |                              |
|------------------------|---------------------|------------------------|------------------------------|
| LED Power              | 25W                 | Dimming Options        | NON-DIM, PHASE, 1-10V, DALI  |
| LED Luminous Flux      | 2125lm              | Power Factor           | 0.9                          |
| Chromaticity Tolerance | SDCM≤3              | UGR                    | <22                          |
| Color Rendering Index  | >80/90              | Driver Options         | LYTEMASTER, TRIDONIC, HELVAR |
| Color Temperature      | 3000K, 4000K, 6000K | Extended Configuration | 2700K, 5000K                 |
| Beam Angle             | 15°/30°/45°         | Options On Request     | Bluetooth                    |

## PRODUCT SPECIFICATION

|               |          |                        |               |
|---------------|----------|------------------------|---------------|
| Mains Volatge | 220-240V | Environmental Temp     | -20°C ~ +40°C |
| Frequency     | 50/60 Hz | Rated Service Life (h) | 55,000        |
| Safety Class  | III      | Certification          | TUV, CE, RoHS |

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.