

TOPAZ

BULKHEAD & WALL LIGHT



Model No: LM-002-WBL4-16W**


INSTALLATION

Suitable for ceiling or wall installation with 4 fixing points.
Approved for indoor use or in outdoor areas, protected by a roof.

AREAS OF APPLICATION

- Supplementary lighting, for Indoor and Outdoor

DIAGRAM

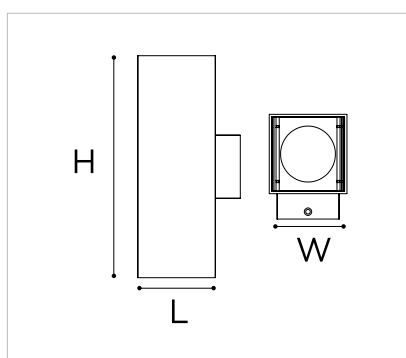


MODEL NUMBER SELECTION

LM-002-WBL4 - 16W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase

CW - 6000K
NW - 4000K
WW - 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

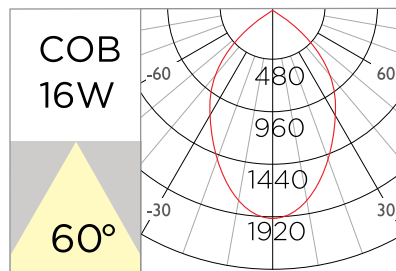

PHYSICAL CHARACTERISTICS

Installation	Wall Mounted	IP-Rating	IP65
Driver	Integrated	IK-Rating	IK10
Dimension	L99 x W75 x H210 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White, Black
Lens	PMMA	Optional Accessories	N/A
Rotation	Non Adjustable		

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	16W	Power Factor	0.9
LED Luminous Flux	1120lm	UGR	<13
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Rendering Index	>80/90	Extended Configuration	2700K, 5000K
Color Temperature	3000K, 4000K, 6000K	Options On Request	N/A
Beam Angle	60°		

PRODUCT SPECIFICATION

Mains Volatge	85-265V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.