


# ZETO V

RECESSED LUMINAIRES

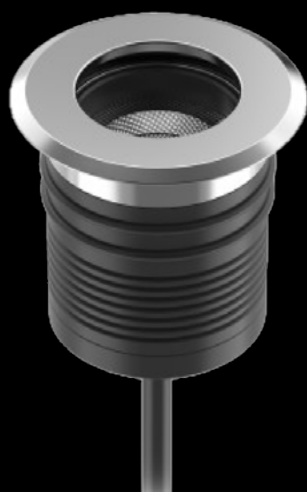

**Model No: LM-B07-ZET5\*\*-3W**

## TECHNICAL DESCRIPTION

Round, floor recessed, Walk-over with integral or remote transformer, different sizes. Polypropylene recessed box and flat stainless steel aluminium frames. Die cast aluminium body sealed to IP67. With a choice of 3 monochromatic colours, dynamic RGB versions for Zeto driven by DMX driver. Other DMX components ordered separately.


## INSTALLATION

Luminaire delivered complete with body, recessed box, frame and glass. All versions are pre-wired. For outdoor applications, 30cm drainage gravel or any equivalent drainage system must be used beneath the housing to ensure water evacuation. The recessed box can be embedded in asphalt with good drainage once the temperature of the asphalt is approximately 80°C.

## AREAS OF APPLICATION

• Uplight • Step Light • Wall Washer

## DIAGRAM

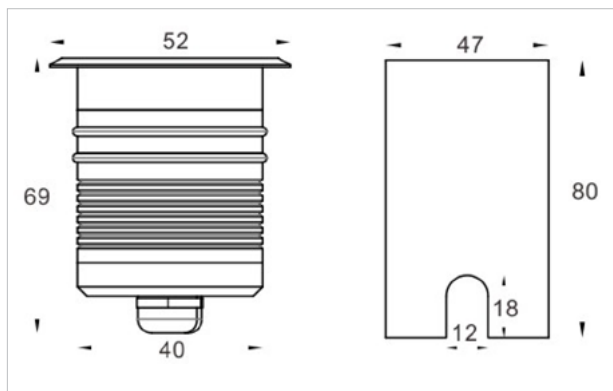

## MODEL NUMBER SELECTION

LM-B07-ZET5    - 3W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase  
DMX - DMX512

Beam Angle		
5-5°	17-17°	10x22-10x22°
8-8°	25-25°	12x45-12x45°
10-10°	40-40°	15x55-15x55°
12-12°	60-60°	

CW - 5700K  
NW - 4000K  
WW - 3000K  
RGBW- RGBW

## PHYSICAL CHARACTERISTICS

Installation	Recessed	IP-Rating	IP67
Driver	Integrated/Remote	IK-Rating	IK04
Dimension	D52x H69 (mm)	Fixture Material	316 Stainless Steel + Die Cast Aluminium
Adjustability	N/A	Standard Finish	Grey, Black
Diffuser	Tempered Glass	Optional Accessories	Honey Comb Louver, Round Mesh Grill, Anti Slip GLas

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Beam Angle	5°/8°/10°/12°/17°/25°/40°/60° 10°x22°/12°x45°/15°x55°
LED Power	3W	Dimming Options	NON-DIM, PHASE, 1-10V, DALI, DMX 512
LED Luminous Flux	240lm	Power Factor	0.9
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, MEANWELL
Color Rendering Index	>80/90	Extended Configuration	5000K, RGBW
Color Temperature	3000K, 4000K, 5700K	Options On Request	N/A

## PRODUCT SPECIFICATION

Input Volatge	12V/24V DC	Environmental Temp	-20°C ~ +50°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.