


# FADE

SURFACE & FACADE LUMINAIRES



## Model No: LM-100-LIN12\*\*-10W

### TECHNICAL DESCRIPTION

Surface mounted with accessory brackets, Extruded aluminium alloy body, surface with anodizing treatment, high strength toughened glass, DMX512 interface adopts high reliable bus connect.


### INSTALLATION

Surface mounted with available brackets.

### AREAS OF APPLICATION

- Wall Washer • Uplight

### DIAGRAM

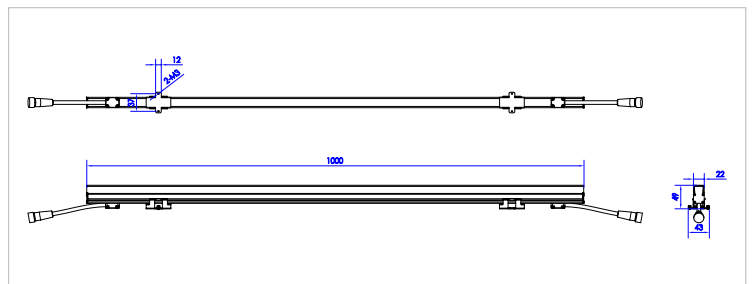


### MODEL NUMBER SELECTION

LM-100-LIN12   - 10W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase  
DMX-DMX512

CW - 6000K  
NW - 4000K  
WW- 3000K  
RGBW- RGBW

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

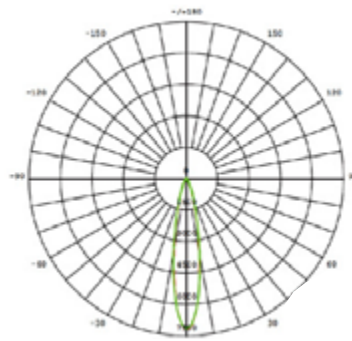

## PHYSICAL CHARACTERISTICS

Installation	Surface
Driver	Integrated
Dimension	L1000 x W43 x H49 (mm)
Adjustability	Fixed
Diffuser	Tempered Glass
Rotation	Fixed

IP-Rating	IP67
IK-Rating	IK08
Fixture Material	Die Cast Aluminium
Standard Finish	Grey, Black
Optional Accessories	N/A

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux, LUXEON
LED Power	10W
LED Luminous Flux	
Chromaticity Tolerance	SDCM≤3
Color Rendering Index	≥80/90
UGR	<22
Color Temperature	2700K-6000K, RGB, RGBW

Beam Angle	120°
Dimming Options	NON-DIM, 1-10V, DALI, DMX512
Power Factor	0.9
Driver Options	LYTEMASTER, TRIDONIC, MEANWELL
Options On Request	Honey comb Louver, Anti Glare Shield

## PRODUCT SPECIFICATION

Input Volatge	DC 24V
Frequency	50/60 Hz
Safety Class	II

Environmental Temp	-25°C ~ +50°C
Rated Service Life (h)	55,000
Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.