

# ZPOTO A1

SPOT DOWN SERIES



**Model No: LM-C02-ZPTA1\*\*-5W**


## DESCRIPTION

Only 23mm light outlet design, hides the lamp perfectly, realizing the effect of invisible light. Gypsum embedded parts and ceiling are perfectly integrated.


## AREAS OF APPLICATION

- Showrooms • Restaurants • Star-rated
- Hotels • Villas • Residential Buildings


## DIAGRAM

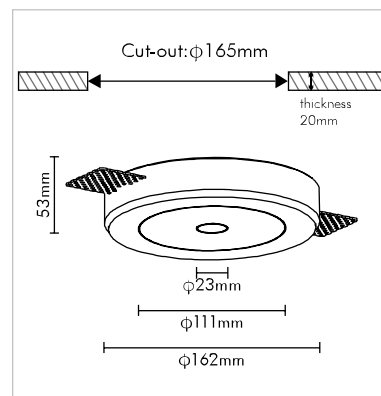

## MODEL NUMBER SELECTION

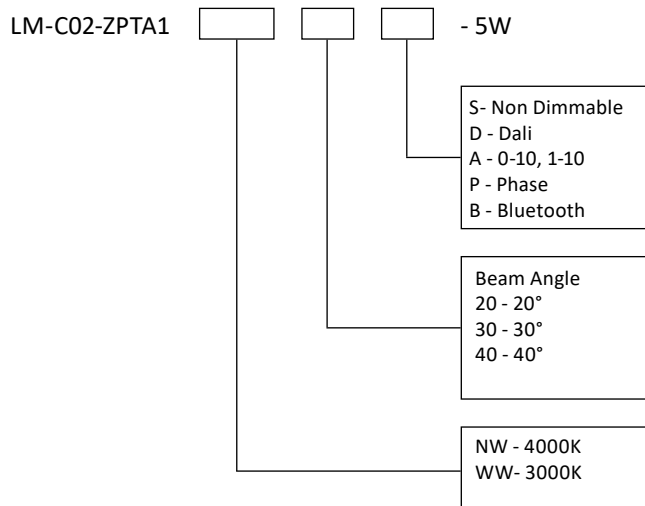

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

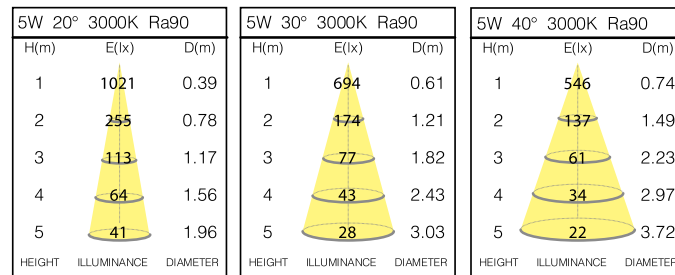

## PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP20
Cut-Out Size	65 (mm)	IK-Rating	IK03
Dimension	D124 x H50 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black
Reflector	Black	Optional Accessories	Exit panel

## ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	350mA	Beam Angle	20°/30°/40°
LED Voltage	12V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	5W	Power Factor	0.9W
System Power	5.1W	UGR	<13
LED Luminous Flux	212~267 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>90	Options On Request	Bluetooth

## PRODUCT SPECIFICATION

Mains Voltage	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.