

# WESTO II

BULKHEAD & WALL LIGHT



**Model No: LM-B13-WST2\*\*-1.5W**

## TECHNICAL DESCRIPTION

Wall recessed Westo II with die-cast black/silver grey aluminium body and opal polycarbonate diffuser. IP65, IK08. All integral in a compact body for easy integration with pre-ordered recessed housing.


## INSTALLATION

Install the recessed housing inside the wall. Connect the light source to the mains supply. fix the body to the recessed housing. Attach the Westo III luminaire to the chosen frame with two torx screws.

## AREAS OF APPLICATION

• Ramp Light • Wall Recessed • Walkway Light

## DIAGRAM

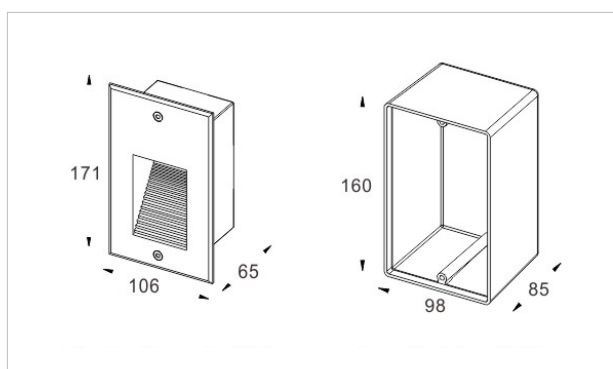

## MODEL NUMBER SELECTION

LM-B13-WST2  - 1.5W

S - Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase  
DMX - DMX512

CW - 6000K  
NW - 4000K  
WW - 3000K

## PHYSICAL CHARACTERISTICS

Installation	Wall Mounted	IP-Rating	IP65
Driver	Integrated	IK-Rating	IK08
Dimension	L171 x B65 x H106 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	Silver, Black
Diffuser	Polycarbonate	Optional Accessories	N/A
Rotation	Non Adjustable		

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Color Rendering Index	>80/90
LED Current	100 mA	Color Temperature	3000K, 4000K, 6000K, R/G/B
LED Voltage	25V	Beam Angle	120°
LED Power	1.5W	Dimming Options	NON-DIM, PHASE, 1-10V, DALI, PWM/DMX512
System Power	1.5W	Power Factor	0.9
LED Luminous Flux	90lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Options On Request	N/A

## PRODUCT SPECIFICATION

Mains Volatge	24V/12V DC 240V/120 AC	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.