
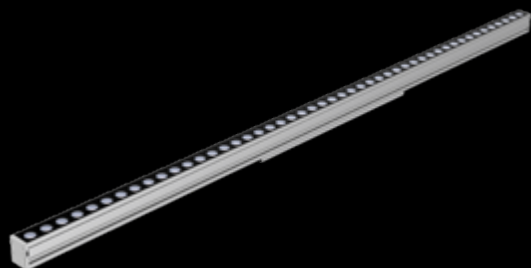


SIEGE

SURFACE & FACADE LUMINAIRES



Model No: LM-021-SISM23-10W**

TECHNICAL DESCRIPTION

Surface mounted with accessory brackets, Extruded aluminium alloy body, surface with anodizing treatment, high strength toughened glass, DMX512 interface adopts high reliable bus connect.


INSTALLATION

Surface mounted with available brackets.

AREAS OF APPLICATION

• Wall Mounted • Outdoor • Pillar Mounted

DIAGRAM

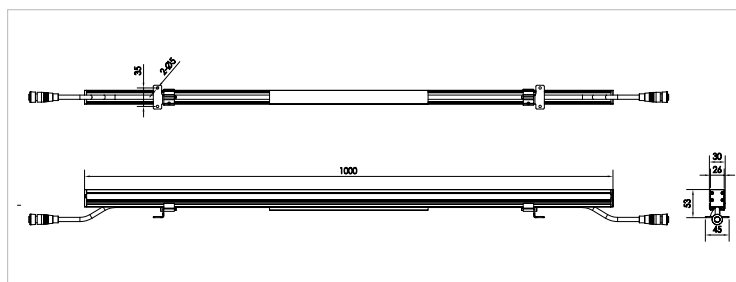


MODEL NUMBER SELECTION

LM-021-SISM23 - 10W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase
DMX-DMX512

CW - 6000K
NW - 4000K
WW - 3000K
RGBW- RGBW

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

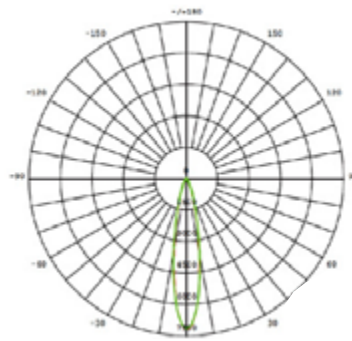

PHYSICAL CHARACTERISTICS

| | | | |
|---------------|------------------------|----------------------|--------------------|
| Installation | Surface | IP-Rating | IP67 |
| Driver | Integrated | IK-Rating | IK08 |
| Dimension | L1000 x W45 x H53 (mm) | Fixture Material | Die Cast Aluminium |
| Adjustability | Fixed | Standard Finish | Grey, Silver |
| Diffuser | Tempered Glass | Optional Accessories | N/A |
| Rotation | Fixed | | |

ELECTRICAL CHARACTERISTICS

| | | | |
|------------------------|-------------------|--------------------|--------------------------------------|
| Light Source | Bridgelux, LUXEON | Beam Angle | 20°/30°/45°/60°/20x40° |
| LED Power | 10W | Dimming Options | NON-DIM, 1-10V, DALI, DMX512 |
| LED Luminous Flux | 800lm | Power Factor | 0.9 |
| Chromaticity Tolerance | SDCM≤3 | Driver Options | LYTEMASTER, TRIDONIC, MEANWELL |
| Color Rendering Index | ≥80/90 | Options On Request | Honey comb Louver, Anti Glare Shield |
| UGR | <22 | | |
| Color Temperature | 2700K-6000K | | |

PRODUCT SPECIFICATION

| | | | |
|---------------|----------|------------------------|---------------|
| Input Volatge | DC 24V | Environmental Temp | -25°C ~ +50°C |
| Frequency | 50/60 Hz | Rated Service Life (h) | 55,000 |
| Safety Class | II | Certification | CE, RoHS |

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.