


SOLO

STRIP & NEON FLEX SERIES

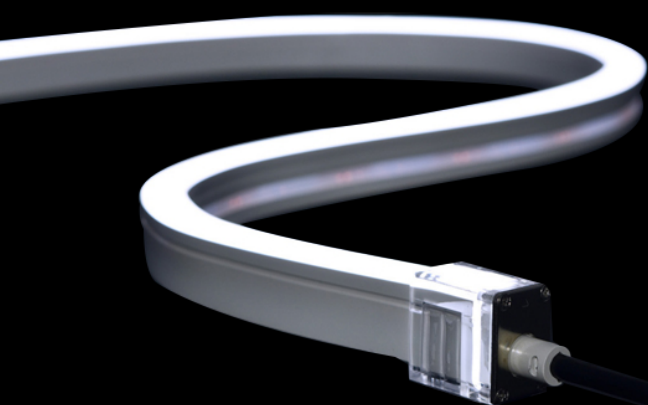

Model No: LM-1010-NFS-****

TECHNICAL DESCRIPTION

Plane shape luminous surface, beam angle 110°. Clear cutting mark, convenience for cutting and positioning. Acid, alkali, salt corrosion resistance, UV resistance. Can be installed flexibly. Small size, concealed installation.


INSTALLATION

Flat, Corner, Arc- Shaped surfaces. inside Cove using a Aluminium Profile or suitable clips.


AREAS OF APPLICATION

- Decoration for showcase • Advertising • Displayer board
- Lighting for hotel • Garden • Bridge • Corridor • Ceiling
- Stair • Path way • Signage • Architecture lighting

DIAGRAM

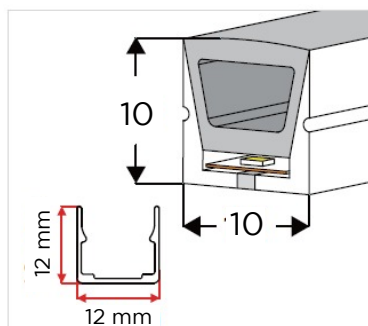

MODEL NUMBER SELECTION

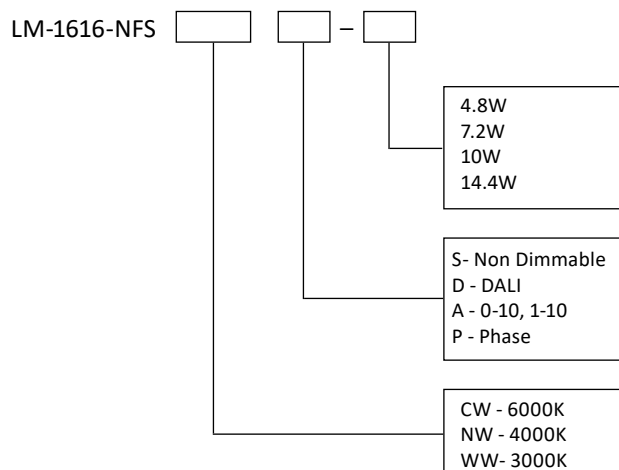

PHYSICAL CHARACTERISTICS

Installation	Profile, Cove, Clips	IP-Rating	IP65/67
Driver	Remote	PCB Cuting	PCB Cuting
Dimension	W10 x H10 (mm) - 5 Meter	Fixture Material	Silicone
Adjustability	N/A	Standard Finish	Milky White Silicone
Diffuser	Silicone	Optional Accessories	Mounting accessories, Connectors on request
Bending	Horizontal		

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Color Temperature	3000K, 4000K, 6000K
LED Power	4.8W/m, 7.2W/m, 10W/m, 14.4W/m	Beam Angle	110°
LED Luminous Flux	85lm/w	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Rendering Index	>80 & 90	Options On Request	Cable Entry: Side, Rear, Bottom

PRODUCT SPECIFICATION

Mains Volatge	DC 24V	Environmental Temp	-20°C ~ +40°C
Frequency	N/A	Rated Service Life (h)	50,000
Safety Class	III	Certification	CE, RoHS



Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.