

Q65

CEILING SURFACE SERIES



Model No: LM-004-Q65U-35W**

TECHNICAL DESCRIPTION

Q65 ceiling surface lights are high quality light fittings designed for long life and low maintenance. Combined with the subtle closed design, this results in a much calmer ceiling appearance with increased efficiency


INSTALLATION

Suitable for installation directly to walls or ceilings, indoors or outdoors.


AREAS OF APPLICATION

• Rooms • Balcony • Boundary Wall • Corridor


DIAGRAM

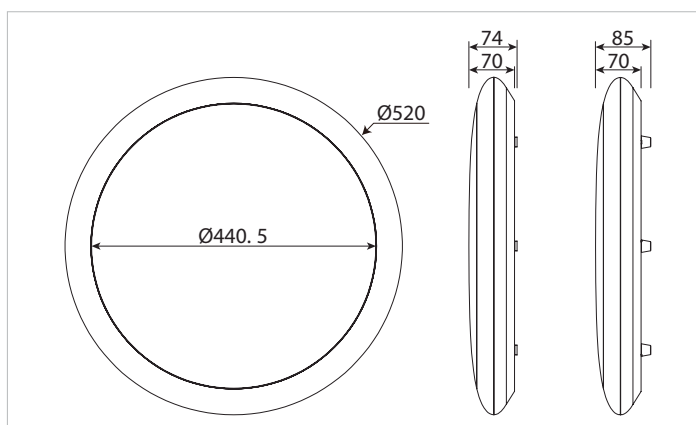

MODEL NUMBER SELECTION

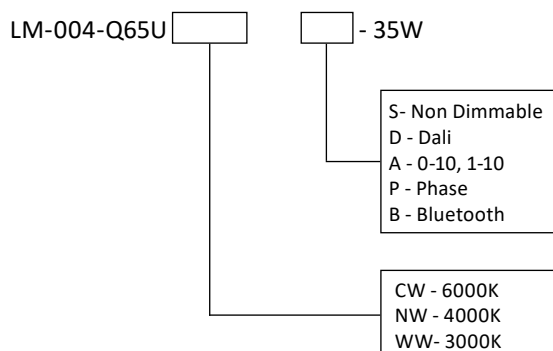

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

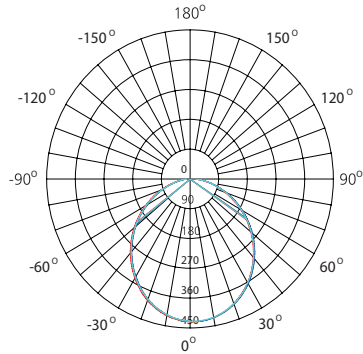

PHYSICAL CHARACTERISTICS

Installation	Ceiling Mounted	IP-Rating	IP65
Driver	Integrated	IK-Rating	IK07
Dimension	D520 x H85 (mm)	Fixture Material	Vandal resistant and V2 self extinguishing polycarbonate UV stabilized
Adjustability	Fixed	Standard Finish	White
Diffuser	Polycarbonate Diffuser	Optional Accessories	N/A
Rotation	Non Adjustable		

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Beam Angle	120°
LED Power	35W	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Luminous Flux	2975lm	Power Factor	0.9
Chromaticity Tolerance	SDCM≤5	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Rendering Index	≥80	Extended Configuration	2700K, 5000K
Color Temperature	3000K, 4000K, 6000K	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	120-277V	Environmental Temp	-10°C ~ +50°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.