

SLING

PROFILE SERIES





Model No: LM-010-PND4**-20W

TECHNICAL DESCRIPTION


Compatible in creating and customizing multiple geometric designs, Sling Direct linear offers eye soothing lighting and lets designers explore their ideas. This Linear with no visible screws offers neat installation. It truly justifies multiple applications ranging from contemporary boardroom environments to workstations. Being capable of offering seamless connectivity of the diffuser and Micro Prismatic PMMA diffuser as optional, this luminaire meets all design requirements.

INSTALLATION


Surface mounted to the ceiling or Suspended from the ceiling using suspension cord / chain the the desired level.

AREAS OF APPLICATION

• Villas • Office • Reception

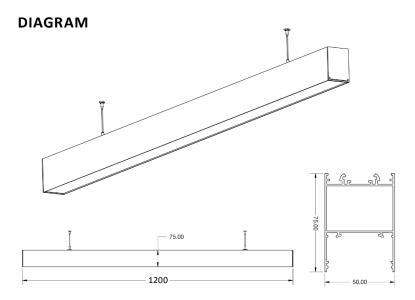


MODEL NUMBER SELECTION





LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PHYSICAL CHARACTERISTICS

Installation	Suspended, Surface	
Driver	Integrated	
Dimension	L1200 x B50 x H75 (mm)	
Adjustability	Fixed	
Diffuser	PMMA, Polycarbonate	
Rotation	Non Adjustable	

IP-Rating	IP40
IK-Rating	IK03
Fixture Material	Extruded Aluminium Powder Coated
Standard Finish	White, Black, White+Black
Optional Accessories	Suspension Cord, Suspension Chain, Mounting Clip, Micro Prismatic PMMA diffuser

ELECTRICAL CHARACTERISTICS

LED Current	550mA
LED Voltage	36V
LED Power	20W
System Power	19.8W
LED Luminous Flux	2000Im
Chromaticity Tolerance	SDCM≤3
Color Rendering Index	>85
Color Temperature	3000K, 4000K, 6000K

Beam Angle	120°	
Dimming Options	NON-DIM, PHASE, 1-10V, DALI	
Power Factor	0.9	
UGR	<19 and 22	
Driver Options	LYTEMASTER, TRIDONIC, HELVAR	
Extended Configuration	2700К, 5000К	
Options On Request	Bluetooth	

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C	
Frequency	50/60 Hz	Rated Service Life (h)	55,000	
Safety Class	II	Certification	TUV, CE, RoHS	

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.