

RIPPLE

STRIP & NEON FLEX SERIES



Model No: LM-011-SR5X-14.4W**


TECHNICAL DESCRIPTION

Optimised solder pads make soldering on site even more reliable and faster. The LED chips have been given an extensive upgrade and guarantee constant luminous flux for a distance of more than five metres.

AREAS OF APPLICATION

- Cove

DIAGRAM

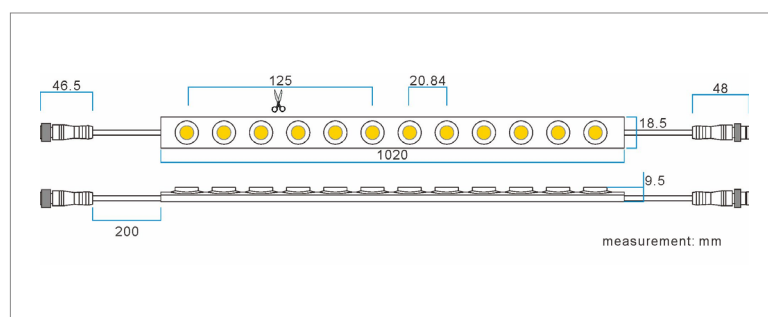

MODEL NUMBER SELECTION

LM-011-SR5X - 14.4W

S- Non Dimmable
D - DALI
A - 0-10, 1-10

CW - 6000K
NW - 4000K
WW - 3000K

PHYSICAL CHARACTERISTICS

Installation	Cove	IP-Rating	IP67
Driver	Remote	IK-Rating	N/A
Dimension	W10 x H4 x L5000 (mm)	Fixture Material	PCB + Silicon
Adjustability	N/A	Standard Finish	Transparent
Rotation	Non Adjustable	Optional Accessories	N/A

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Beam Angle	120°
LED Power	14.4W/Meter	Dimming Options	NON-DIM, 1-10V, DALI
LED Luminous Flux	1440lm/Meter	Power Factor	0.9
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Rendering Index	>90		
Color Temperature	3000K, 4000K, 6000K		

PRODUCT SPECIFICATION

Mains Volatge	DC 24V	Rated Service Life (h)	55,000
Safety Class	III	Certification	CE, RoHS
Environmental Temp	-20°C ~ +40°C		

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.