



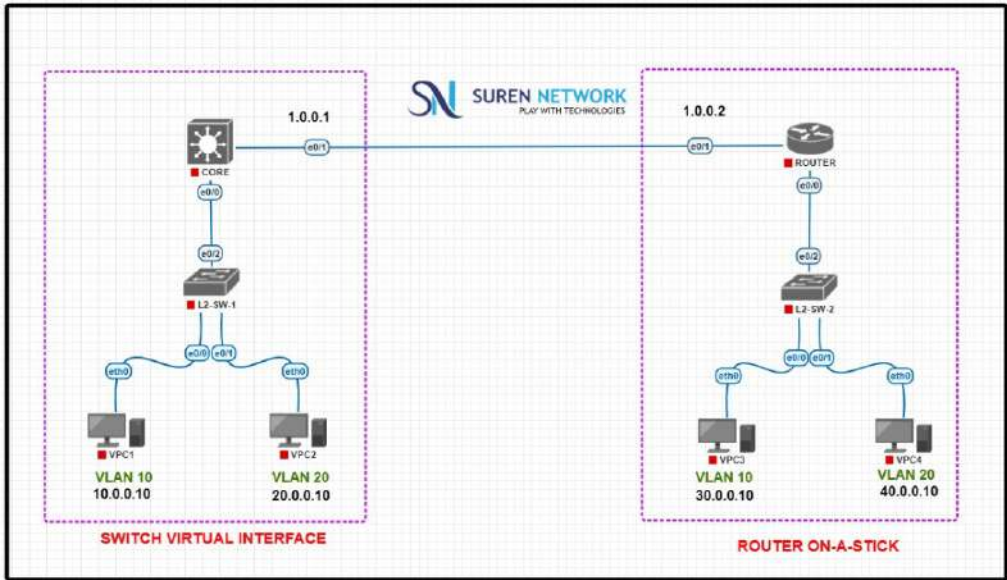

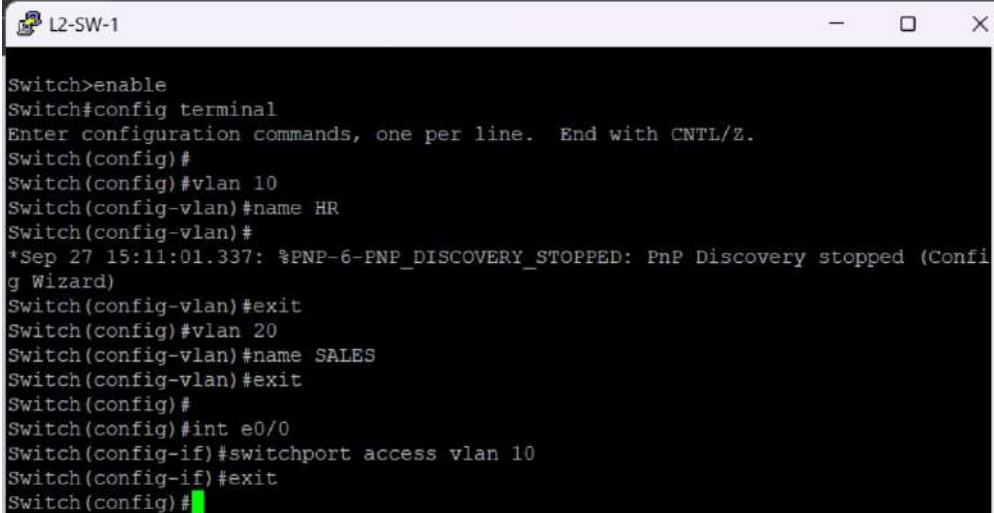

A terminal window titled "L2-SW-1" with standard window controls (minimize, maximize, close). The terminal displays a series of commands and their outputs for configuring a switch. The commands include enabling the terminal, configuring VLANs 10 and 20 with names HR and SALES, and configuring interface e0/0 as an access port for VLAN 10. A system message about PnP discovery is also visible.

```
Switch>enable
Switch#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#
Switch(config)#vlan 10
Switch(config-vlan)#name HR
Switch(config-vlan)#
*Sep 27 15:11:01.337: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name SALES
Switch(config-vlan)#exit
Switch(config)#
Switch(config)#int e0/0
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#
```

CORE

```
CORE#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
CORE(config)#vlan 10
CORE(config-vlan)#exit
CORE(config)#vlan 20
CORE(config-vlan)#exit
CORE(config)#
CORE(config)#int e0/0
CORE(config-if)#switchport trunk encapsulation dot1q
CORE(config-if)#switchport mode trunk
CORE(config-if)#exit
CORE(config)#
*Sep 27 15:15:43.602: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
CORE(config)#interface vlan 10
CORE(config-if)#ip add
*Sep 27 15:15:58.717: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan10, changed state to down
CORE(config-if)#ip add 10.0.0.1 255.0.0.0
CORE(config-if)#no sh
CORE(config-if)#exit
CORE(config)#
*Sep 27 15:16:22.972: %LINK-3-UPDOWN: Interface Vlan10, changed state to up
*Sep 27 15:16:23.973: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan10, changed state to up
CORE(config)#interface vlan 20
CORE(config-if)#ip add
*Sep 27 15:16:35.943: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan20, changed state to down
CORE(config-if)#ip add 20.0.0.1 255.0.0.0
CORE(config-if)#no sh
CORE(config-if)#exit
CORE(config)#
*Sep 27 15:16:57.043: %LINK-3-UPDOWN: Interface Vlan20, changed state to up
*Sep 27 15:16:58.047: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan20, changed state to up
CORE(config)#
CORE(config)#ip routing
CORE(config)#exit
CORE#
```

 L2-SW-2

```
Switch(config)#
Switch(config)#
Switch(config)#vlan 10
Switch(config-vlan)#name HR
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name SALES
Switch(config-vlan)#exit
Switch(config)#
Switch(config)#int e0/0
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#
Switch(config)#
Switch(config)#
```

ROUTER

```
Router#show ip int br
Interface                               IP-Address   OK? Method Status      Prot
locol                                   unassigned   YES unset    up          up
Ethernet0/0                             unassigned   YES unset    up          up
Ethernet0/0.1                           30.0.0.1     YES manual   up          up
Ethernet0/0.2                           40.0.0.1     YES manual   up          up
Ethernet0/1                             unassigned   YES unset    administratively down down
Ethernet0/2                             unassigned   YES unset    administratively down down
Ethernet0/3                             unassigned   YES unset    administratively down down
```

```
Router#show ip route
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR
```

```
Gateway of last resort is not set
```

```

    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       30.0.0.0/8 is directly connected, Ethernet0/0.1
L       30.0.0.1/32 is directly connected, Ethernet0/0.1
    40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       40.0.0.0/8 is directly connected, Ethernet0/0.2
L       40.0.0.1/32 is directly connected, Ethernet0/0.2
```

```
Router#
```

```
Router#
```

```
L2-SW-2
L2-SW-2#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
L2-SW-2(config)#
L2-SW-2(config)#
L2-SW-2(config)#interface e0/2
L2-SW-2(config-if)#switchport trunk encapsulation dot1q
L2-SW-2(config-if)#switchport mode trunk
L2-SW-2(config-if)#no
*Sep 27 16:08:10.073: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to down
L2-SW-2(config-if)#no shutdown
L2-SW-2(config-if)#
*Sep 27 16:08:13.077: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to up
L2-SW-2(config-if)#exit
L2-SW-2(config)#
L2-SW-2(config)#
L2-SW-2(config)#
```

```
VPC1> ip 10.0.0.10 255.0.0.0 10.0.0.1
Checking for duplicate address...
VPC1 : 10.0.0.10 255.0.0.0 gateway 10.0.0.1

VPC1> show ip

NAME       : VPC1[1]
IP/MASK    : 10.0.0.10/8
GATEWAY    : 10.0.0.1
DNS        :
MAC        : 00:50:79:66:68:a5
LPORT     : 20000
RHOST:PORT : 127.0.0.1:30000
MTU        : 1500

VPC1> ping 20.0.0.10

20.0.0.10 icmp_seq=1 timeout
64 bytes from 20.0.0.10 icmp_seq=2 ttl=63 time=3.074 ms
64 bytes from 20.0.0.10 icmp_seq=3 ttl=63 time=3.005 ms
64 bytes from 20.0.0.10 icmp_seq=4 ttl=63 time=2.729 ms
64 bytes from 20.0.0.10 icmp_seq=5 ttl=63 time=3.029 ms
```

```
VPC2
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

VPC2> ip 20.0.0.10 255.0.0.0 20.0.0.1
Checking for duplicate address...
VPC2 : 20.0.0.10 255.0.0.0 gateway 20.0.0.1

VPC2> show ip

NAME       : VPC2[1]
IP/MASK    : 20.0.0.10/8
GATEWAY    : 20.0.0.1
DNS        :
MAC        : 00:50:79:66:68:a6
LPORT      : 20000
RHOST:PORT : 127.0.0.1:30000
MTU        : 1500

VPC2>
```

CORE

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, \* - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP  
a - application route  
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

```
1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    1.0.0.0/8 is directly connected, Ethernet0/1
L    1.0.0.1/32 is directly connected, Ethernet0/1
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/8 is directly connected, Vlan10
L    10.0.0.1/32 is directly connected, Vlan10
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Vlan20
L    20.0.0.1/32 is directly connected, Vlan20
S    30.0.0.0/8 [1/0] via 1.0.0.2
S    40.0.0.0/8 [1/0] via 1.0.0.2
```

CORE#

CORE#

CORE#

 ROUTER

Gateway of last resort is not set

```

      1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       1.0.0.0/8 is directly connected, Ethernet0/1
L       1.0.0.2/32 is directly connected, Ethernet0/1
S       10.0.0.0/8 [1/0] via 1.0.0.1
S       20.0.0.0/8 [1/0] via 1.0.0.1
      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       30.0.0.0/8 is directly connected, Ethernet0/0.1
L       30.0.0.1/32 is directly connected, Ethernet0/0.1
      40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       40.0.0.0/8 is directly connected, Ethernet0/0.2
L       40.0.0.1/32 is directly connected, Ethernet0/0.2
```

ROUTER#

ROUTER#

ROUTER#

ROUTER#

```
VPC3
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

VPC3> ip 30.0.0.10 255.0.0.0 30.0.0.1
Checking for duplicate address...
VPC3 : 30.0.0.10 255.0.0.0 gateway 30.0.0.1

VPC3> show ip
NAME      : VPC3[1]
IP/MASK    : 30.0.0.10/8
GATEWAY    : 30.0.0.1
DNS        :
MAC        : 00:50:79:66:68:a7
LPORT      : 20000
RHOST:PORT : 127.0.0.1:30000
MTU        : 1500
```

```
VPC4
For more information, please visit wiki.freecode.com.cn.
Modified version for EVE-NG.

Press '?' to get help.

Executing the startup file

VPC4> ip 40.0.0.10 255.0.0.0 40.0.0.1
Checking for duplicate address...
VPC4 : 40.0.0.10 255.0.0.0 gateway 40.0.0.1

VPC4> show ip
NAME       : VPC4[1]
IP/MASK     : 40.0.0.10/8
GATEWAY     : 40.0.0.1
DNS         :
MAC         : 00:50:79:66:68:a8
LPORT      : 20000
RHOST:PORT  : 127.0.0.1:30000
MTU         : 1500

VPC4> 
```

VPC1

VPC1>

VPC1>

VPC1> ping 30.0.0.10

84 bytes from 30.0.0.10 icmp\_seq=1 ttl=62 time=5.087 ms

84 bytes from 30.0.0.10 icmp\_seq=2 ttl=62 time=3.703 ms

84 bytes from 30.0.0.10 icmp\_seq=3 ttl=62 time=3.131 ms

84 bytes from 30.0.0.10 icmp\_seq=4 ttl=62 time=3.788 ms

84 bytes from 30.0.0.10 icmp\_seq=5 ttl=62 time=3.165 ms

VPC1> ping 40.0.0.10

84 bytes from 40.0.0.10 icmp\_seq=1 ttl=62 time=5.172 ms

84 bytes from 40.0.0.10 icmp\_seq=2 ttl=62 time=3.280 ms

84 bytes from 40.0.0.10 icmp\_seq=3 ttl=62 time=3.895 ms

84 bytes from 40.0.0.10 icmp\_seq=4 ttl=62 time=3.610 ms

84 bytes from 40.0.0.10 icmp\_seq=5 ttl=62 time=4.485 ms

VPC1>

VPC1>

VPC1>

VPC1>

VPC1>

—

