

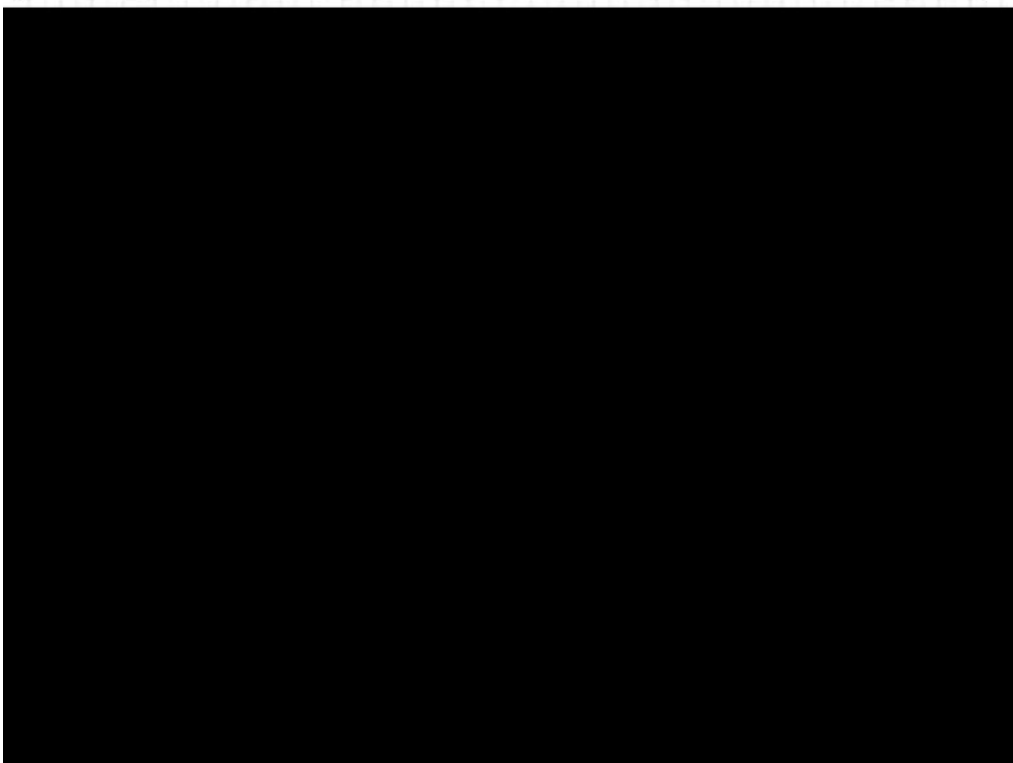
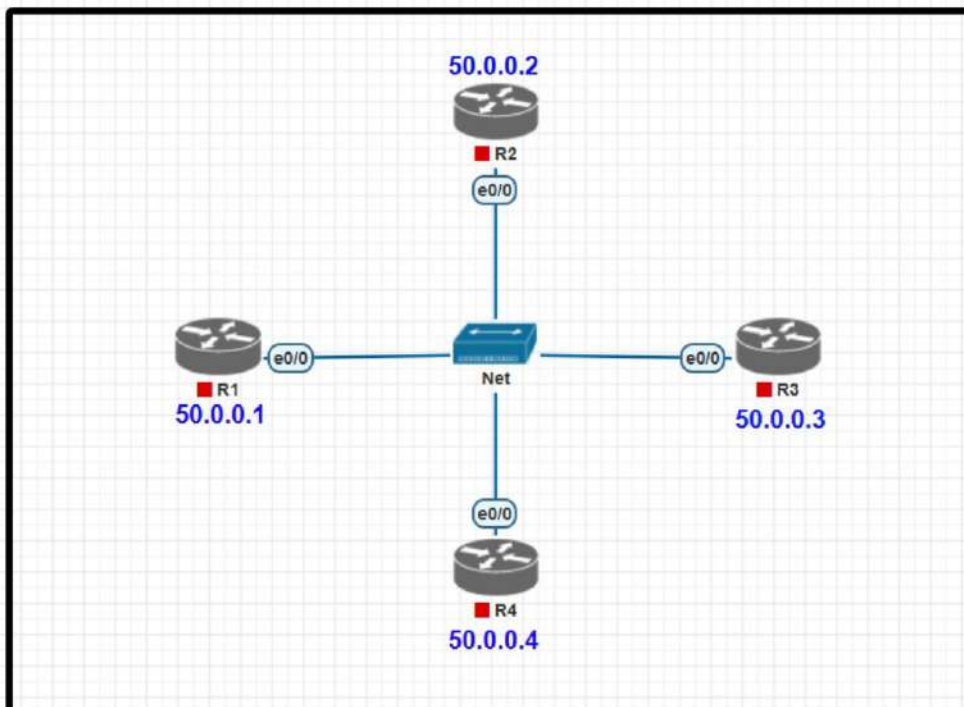




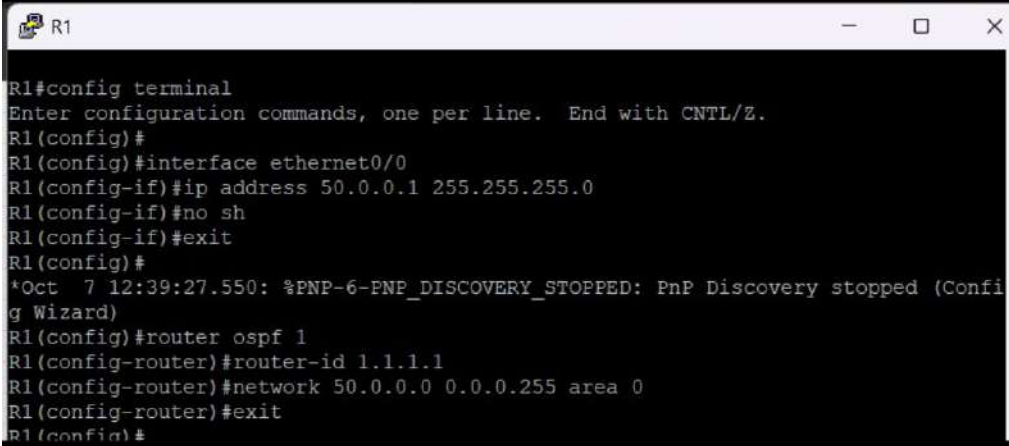

A terminal window titled 'R1' with standard window controls (minimize, maximize, close). The terminal displays a series of configuration commands for a network device. The commands include entering configuration mode, configuring the Ethernet0/0 interface with IP address 50.0.0.1 and subnet mask 255.255.255.0, disabling shutdown, enabling OSPF, setting the router ID to 1.1.1.1, and advertising the 50.0.0.0/25 network. A system message about PnP discovery is also visible.

```
R1#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#
R1(config)#interface ethernet0/0
R1(config-if)#ip address 50.0.0.1 255.255.255.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#
*Oct  7 12:39:27.550: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#router ospf 1
R1(config-router)#router-id 1.1.1.1
R1(config-router)#network 50.0.0.0 0.0.0.255 area 0
R1(config-router)#exit
R1(config)#
```

R2

```
R2#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
R2(config)#interface ethernet0/0
R2(config-if)#ip address 50.0.0.2 255.255.255.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#
```

```
R3
R3#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#interface e
*Oct 7 12:39:42.095: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3(config)#interface ethernet0/0
R3(config-if)#ip address 50.0.0.3 255.255.255.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#router ospf 1
R3(config-router)#router-id 3.3.3.3
R3(config-router)#network 50.0.0.0 0.0.0.255 area 0
R3(config-router)#
*Oct 7 12:44:58.865: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Ethernet0/0 from LOADING to FULL, Loading Done
R3(config-router)#exit
R3(config)#
*Oct 7 12:45:02.527: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on Ethernet0/0 from LOADING to FULL, Loading Done
R3(config)#exit
R3#
*Oct 7 12:46:36.973: %SYS-5-CONFIG_I: Configured from console by console
R3#
```

```
R4
R4#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
R4(config)#
*Oct  7 12:41:05.588: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R4(config)#interface ethernet0/0
R4(config-if)#ip address 50.0.0.4 255.255.255.0
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#router ospf 1
R4(config-router)#router-id 4.4.4.4
R4(config-router)#network 50.0.0.0 0.0.0.255 area 0
R4(config-router)#exit
R4(config)#
*Oct  7 12:45:56.474: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Ethernet0/0 from LOADING to FULL, Loading Done
R4(config)#
*Oct  7 12:46:00.076: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on Ethernet0/0 from LOADING to FULL, Loading Done
R4(config)#exit
R4#
*Oct  7 12:46:15.976: %SYS-5-CONFIG_I: Configured from console by console
R4#
```

```

R1#
R1#
R1#show ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address      Interface
2.2.2.2          1     FULL/BDR        00:00:39   50.0.0.2     Ethernet0/0
3.3.3.3          1     FULL/DROTHER    00:00:33   50.0.0.3     Ethernet0/0
4.4.4.4          1     FULL/DROTHER    00:00:34   50.0.0.4     Ethernet0/0
R1#
R1#show ip ospf database

        OSPF Router with ID (1.1.1.1) (Process ID 1)

        Router Link States (Area 0)

Link ID      ADV Router   Age         Seq#          Checksum Link count
1.1.1.1      1.1.1.1      174         0x80000006   0x00D7DE 1
2.2.2.2      2.2.2.2      173         0x80000007   0x009715 1
3.3.3.3      3.3.3.3      174         0x80000004   0x005F47 1
4.4.4.4      4.4.4.4      173         0x80000003   0x00237B 1

        Net Link States (Area 0)

Link ID      ADV Router   Age         Seq#          Checksum
50.0.0.1     1.1.1.1      174         0x80000003   0x008D43
R1#
R1#show ip route ospf
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

R1#ping 50.0.0.3
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 50.0.0.3, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
R1#
R1#

```

