


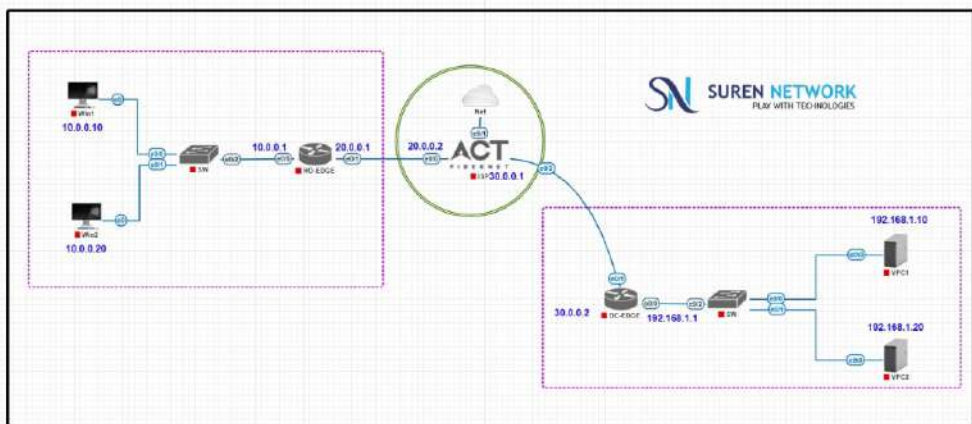






HO-EDGE

```
HO-EDGE#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
HO-EDGE(config)#interface ethernet0/0
HO-EDGE(config-if)#ip address 10.0.0.1 255.0.0.0
HO-EDGE(config-if)#no shutdown
HO-EDGE(config-if)#exit
HO-EDGE(config)#
HO-EDGE(config)#
HO-EDGE(config)#interface ethernet 20.0.0.1 255.0.0.0
      ^
% Invalid input detected at '^' marker.

HO-EDGE(config)#interface ethernet0/1
HO-EDGE(config-if)#
HO-EDGE(config-if)#ip address 20.0.0.1 255.0.0.0
HO-EDGE(config-if)#no shutdown
HO-EDGE(config-if)#exit
HO-EDGE(config)#
HO-EDGE(config)#
HO-EDGE(config)#ip route 0.0.0.0 0.0.0.0 20.0.0.2
HO-EDGE(config)#exit
HO-EDGE#
HO-EDGE#
HO-EDGE#
*Sep 27 12:02:01.081: %SYS-5-CONFIG_I: Configured from console by console
HO-EDGE#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
HO-EDGE(config)#
HO-EDGE(config)#
HO-EDGE(config)#interface ethernet0/0
HO-EDGE(config-if)#ip nat inside
HO-EDGE(config-if)#exit
*Sep 27 12:02:36.902: %LINEPROTO-5-UPDOWN: Line protocol on Interface NVI0, changed state to up
HO-EDGE(config-if)#exit
HO-EDGE(config)#
HO-EDGE(config)#interface ethernet0/1
HO-EDGE(config-if)#ip nat outside
HO-EDGE(config-if)#exit
HO-EDGE(config)#
```

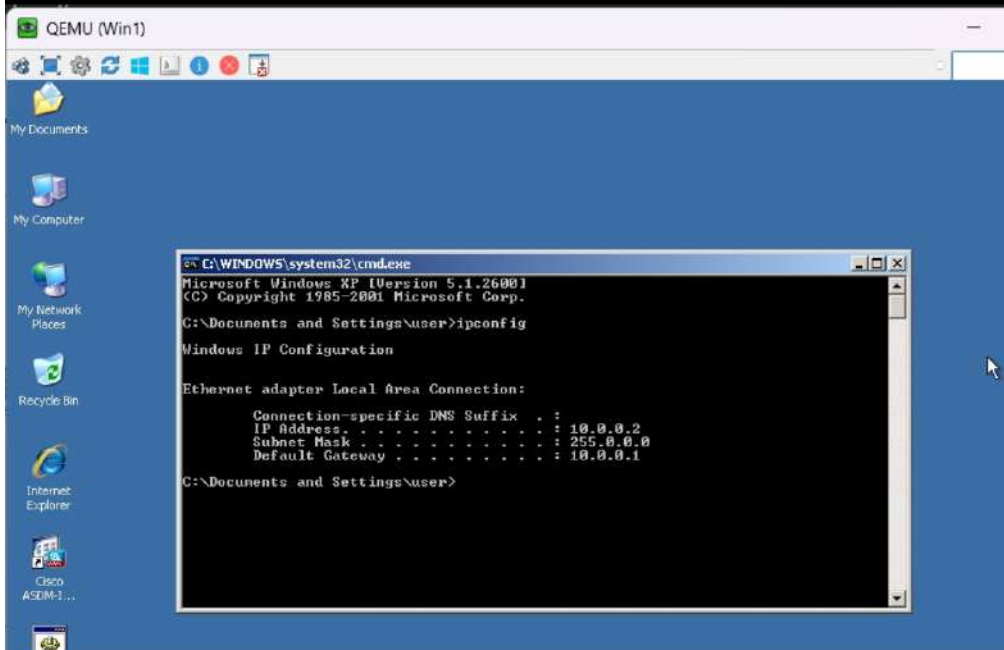

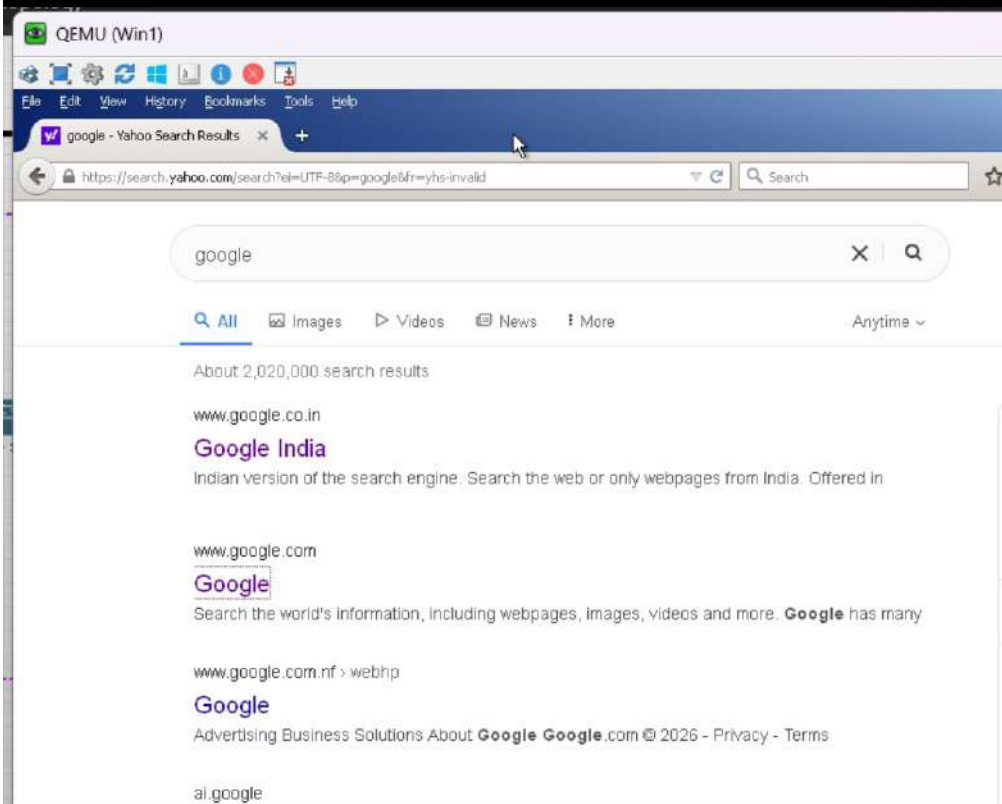

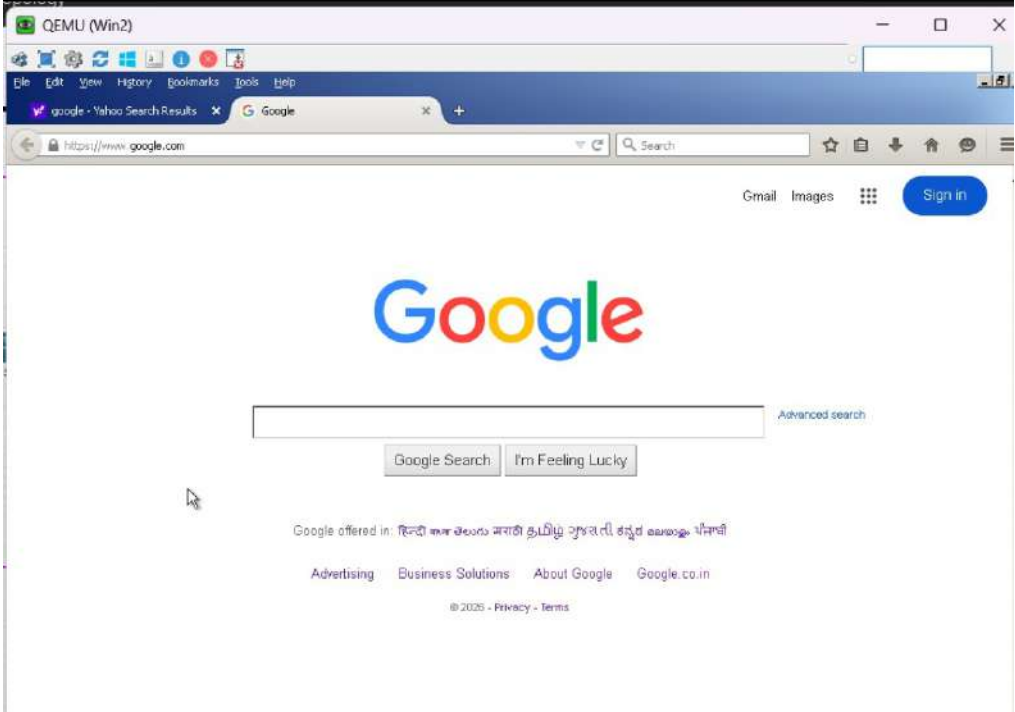

DC-EDGE

```
DC-EDGE#
DC-EDGE#
DC-EDGE#
DC-EDGE#
DC-EDGE#
DC-EDGE#show ip int br
Interface IP-Address OK? Method Status Prot
ocol
Ethernet0/0 192.168.1.1 YES manual up up
Ethernet0/1 30.0.0.2 YES manual up up
Ethernet0/2 unassigned YES TFTP down down
Ethernet0/3 unassigned YES TFTP down down
NV10 192.168.1.1 YES unset up up

DC-EDGE#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is 30.0.0.1 to network 0.0.0.0

S* 0.0.0.0/0 [1/0] via 30.0.0.1
   30.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.2/32 is directly connected, Ethernet0/1
L    30.0.0.10/32 is directly connected, Ethernet0/1
L    30.0.0.11/32 is directly connected, Ethernet0/1
   192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.168.1.0/24 is directly connected, Ethernet0/0
L    192.168.1.1/32 is directly connected, Ethernet0/0
DC-EDGE#
DC-EDGE#
DC-EDGE#
```

