



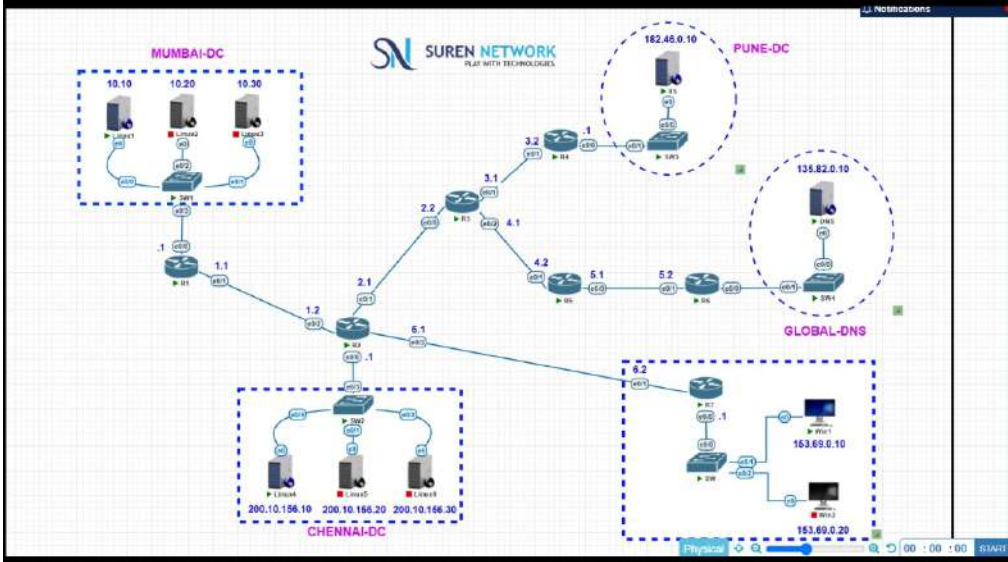

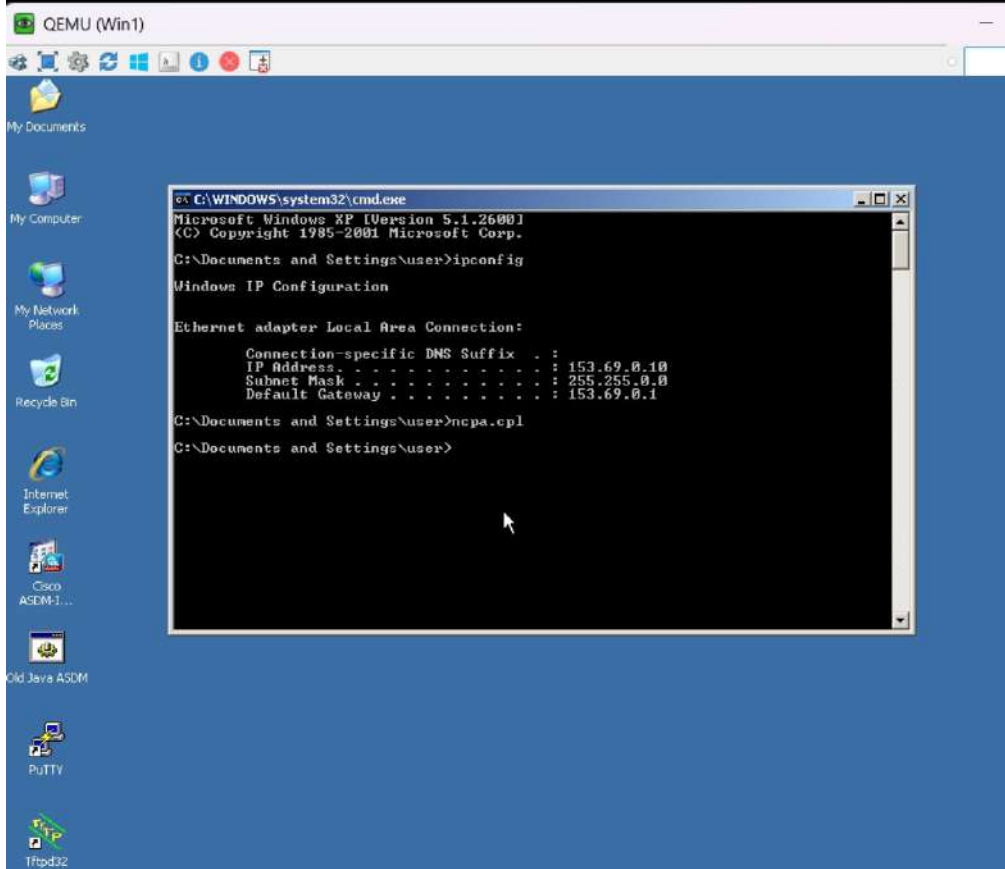

```

R7#show ip int br
Interface                               IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0                             153.69.0.1      YES manual up          up
Ethernet0/1                             6.0.0.2         YES manual up          up
Ethernet0/2                             unassigned      YES TFTP  up          up
Ethernet0/3                             unassigned      YES TFTP  up          up

R7#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    1.0.0.0/8 [1/0] via 6.0.0.1
S    2.0.0.0/8 [1/0] via 6.0.0.1
S    3.0.0.0/8 [1/0] via 6.0.0.1
S    4.0.0.0/8 [1/0] via 6.0.0.1
S    5.0.0.0/8 [1/0] via 6.0.0.1
     6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
       6.0.0.0/8 is directly connected, Ethernet0/1
L     6.0.0.2/32 is directly connected, Ethernet0/1
S    10.0.0.0/8 [1/0] via 6.0.0.1
S    135.82.0.0/16 [1/0] via 6.0.0.1
     153.69.0.0/16 is variably subnetted, 2 subnets, 2 masks
       C     153.69.0.0/16 is directly connected, Ethernet0/0
       L     153.69.0.1/32 is directly connected, Ethernet0/0
S    182.46.0.0/16 [1/0] via 6.0.0.1
R7#

```

```

R2
R2#show ip int br
Interface                IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0              200.10.156.1    YES manual up          up
Ethernet0/1              2.0.0.1         YES manual up          up
Ethernet0/2              1.0.0.2         YES manual up          up
Ethernet0/3              6.0.0.1         YES manual up          up

R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       1.0.0.0/8 is directly connected, Ethernet0/2
L       1.0.0.2/32 is directly connected, Ethernet0/2
    2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       2.0.0.0/8 is directly connected, Ethernet0/1
L       2.0.0.1/32 is directly connected, Ethernet0/1
S       3.0.0.0/8 [1/0] via 2.0.0.2
S       4.0.0.0/8 [1/0] via 2.0.0.2
S       5.0.0.0/8 [1/0] via 2.0.0.2
    6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       6.0.0.0/8 is directly connected, Ethernet0/3
L       6.0.0.1/32 is directly connected, Ethernet0/3
S       10.0.0.0/8 [1/0] via 1.0.0.1
S       135.82.0.0/16 [1/0] via 2.0.0.2
S       153.69.0.0/16 [1/0] via 6.0.0.2
S       182.46.0.0/16 [1/0] via 2.0.0.2
    200.10.156.0/24 is variably subnetted, 2 subnets, 2 masks
C       200.10.156.0/24 is directly connected, Ethernet0/0
L       200.10.156.1/32 is directly connected, Ethernet0/0
R2#
R2#

```

```

R1
R1#show ip int br
Interface                               IP-Address      OK? Method Status      Prot
Ethernet0/0                             10.0.0.1        YES manual  up          up
Ethernet0/1                             1.0.0.1         YES manual  up          up
Ethernet0/2                             unassigned      YES TFTP    up          up
Ethernet0/3                             unassigned      YES TFTP    up          up

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
      C       1.0.0.0/8 is directly connected, Ethernet0/1
      L       1.0.0.1/32 is directly connected, Ethernet0/1
      S       2.0.0.0/8 [1/0] via 1.0.0.2
      S       3.0.0.0/8 [1/0] via 1.0.0.2
      S       4.0.0.0/8 [1/0] via 1.0.0.2
      S       5.0.0.0/8 [1/0] via 1.0.0.2
      S       6.0.0.0/8 [1/0] via 1.0.0.2
    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
      C       10.0.0.0/8 is directly connected, Ethernet0/0
      L       10.0.0.1/32 is directly connected, Ethernet0/0
      S      135.82.0.0/16 [1/0] via 1.0.0.2
      S      153.69.0.0/16 [1/0] via 1.0.0.2
      S      182.46.0.0/16 [1/0] via 1.0.0.2
R1#
R1#
R1#
R1#
R1#
R1#

```

```

R3
R3#show ip int br
Interface                               IP-Address      OK? Method Status      Prot
Ethernet0/0                             2.0.0.2         YES manual up          up
Ethernet0/1                             3.0.0.1         YES manual up          up
Ethernet0/2                             4.0.0.1         YES manual up          up
Ethernet0/3                             unassigned      YES TFTP  up          up

R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from Pfr

Gateway of last resort is not set

S    1.0.0.0/8 [1/0] via 2.0.0.1
    2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    2.0.0.0/8 is directly connected, Ethernet0/0
L    2.0.0.2/32 is directly connected, Ethernet0/0
    3.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    3.0.0.0/8 is directly connected, Ethernet0/1
L    3.0.0.1/32 is directly connected, Ethernet0/1
    4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    4.0.0.0/8 is directly connected, Ethernet0/2
L    4.0.0.1/32 is directly connected, Ethernet0/2
S    5.0.0.0/8 [1/0] via 4.0.0.2
S    6.0.0.0/8 [1/0] via 2.0.0.1
S    10.0.0.0/8 [1/0] via 2.0.0.1
S    135.82.0.0/16 [1/0] via 4.0.0.2
S    153.69.0.0/16 [1/0] via 2.0.0.1
S    182.46.0.0/16 [1/0] via 3.0.0.2
R3#
R3#

```

R4

Press RETURN to get started.

R4#show ip int br

Interface	IP-Address	OK?	Method	Status	Prot
ocol					
Ethernet0/0	182.46.0.1	YES	manual	up	up
Ethernet0/1	3.0.0.2	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	up	up
Ethernet0/3	unassigned	YES	TFTP	up	up

R4#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

```
S    1.0.0.0/8 [1/0] via 3.0.0.1
S    2.0.0.0/8 [1/0] via 3.0.0.1
      3.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    3.0.0.0/8 is directly connected, Ethernet0/1
L    3.0.0.2/32 is directly connected, Ethernet0/1
S    4.0.0.0/8 [1/0] via 3.0.0.1
S    5.0.0.0/8 [1/0] via 3.0.0.1
S    6.0.0.0/8 [1/0] via 3.0.0.1
S    10.0.0.0/8 [1/0] via 3.0.0.1
S    135.82.0.0/16 [1/0] via 3.0.0.1
S    153.69.0.0/16 [1/0] via 3.0.0.1
      182.46.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    182.46.0.0/16 is directly connected, Ethernet0/0
L    182.46.0.1/32 is directly connected, Ethernet0/0
S    200.10.156.0/24 [1/0] via 3.0.0.1
```

R4#

R4#

```

R5#
R5#show ip int br

```

Interface	IP-Address	OK?	Method	Status	Prot
Ethernet0/0	5.0.0.1	YES	manual	up	up
Ethernet0/1	4.0.0.2	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	up	up
Ethernet0/3	unassigned	YES	TFTP	up	up

```

R5#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    1.0.0.0/8 [1/0] via 4.0.0.1
S    2.0.0.0/8 [1/0] via 4.0.0.1
S    3.0.0.0/8 [1/0] via 4.0.0.1
     4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    4.0.0.0/8 is directly connected, Ethernet0/1
L    4.0.0.2/32 is directly connected, Ethernet0/1
     5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    5.0.0.0/8 is directly connected, Ethernet0/0
L    5.0.0.1/32 is directly connected, Ethernet0/0
S    6.0.0.0/8 [1/0] via 4.0.0.1
S    10.0.0.0/8 [1/0] via 4.0.0.1
S    135.82.0.0/16 [1/0] via 5.0.0.2
S    153.69.0.0/16 [1/0] via 4.0.0.1
S    182.46.0.0/16 [1/0] via 4.0.0.1
R5#
R5#

```

```

R6
Press RETURN to get started.

R6#
R6#show ip int br
Interface                IP-Address      OK? Method Status      Prot
-----
Ethernet0/0              135.82.0.1      YES manual up          up
Ethernet0/1              5.0.0.2         YES manual up          up
Ethernet0/2              unassigned      YES TFTP  up          up
Ethernet0/3              unassigned      YES TFTP  up          up


R6#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    1.0.0.0/8 [1/0] via 5.0.0.1
S    2.0.0.0/8 [1/0] via 5.0.0.1
S    3.0.0.0/8 [1/0] via 5.0.0.1
S    4.0.0.0/8 [1/0] via 5.0.0.1
C    5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
      5.0.0.0/8 is directly connected, Ethernet0/1
L    5.0.0.2/32 is directly connected, Ethernet0/1
S    6.0.0.0/8 [1/0] via 5.0.0.1
S    10.0.0.0/8 [1/0] via 5.0.0.1
C    135.82.0.0/16 is variably subnetted, 2 subnets, 2 masks
      135.82.0.0/16 is directly connected, Ethernet0/0
L    135.82.0.1/32 is directly connected, Ethernet0/0
S    153.69.0.0/16 [1/0] via 5.0.0.1
S    182.46.0.0/16 [1/0] via 5.0.0.1


R6#
R6#


```

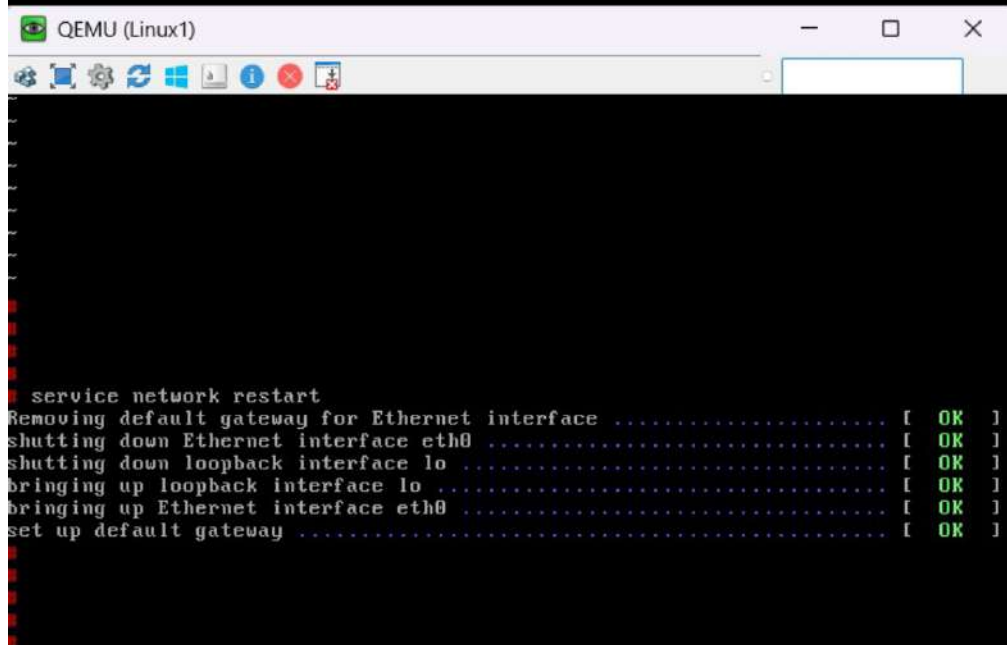

The image shows a terminal window titled "QEMU (Linux1)". The terminal output displays the execution of the "service network restart" command, which performs several network-related actions. Each action is followed by a status indicator in brackets, all of which are "OK".

```
service network restart
Removing default gateway for Ethernet interface ..... [ OK ]
shutting down Ethernet interface eth0 ..... [ OK ]
shutting down loopback interface lo ..... [ OK ]
bringing up loopback interface lo ..... [ OK ]
bringing up Ethernet interface eth0 ..... [ OK ]
set up default gateway ..... [ OK ]
```

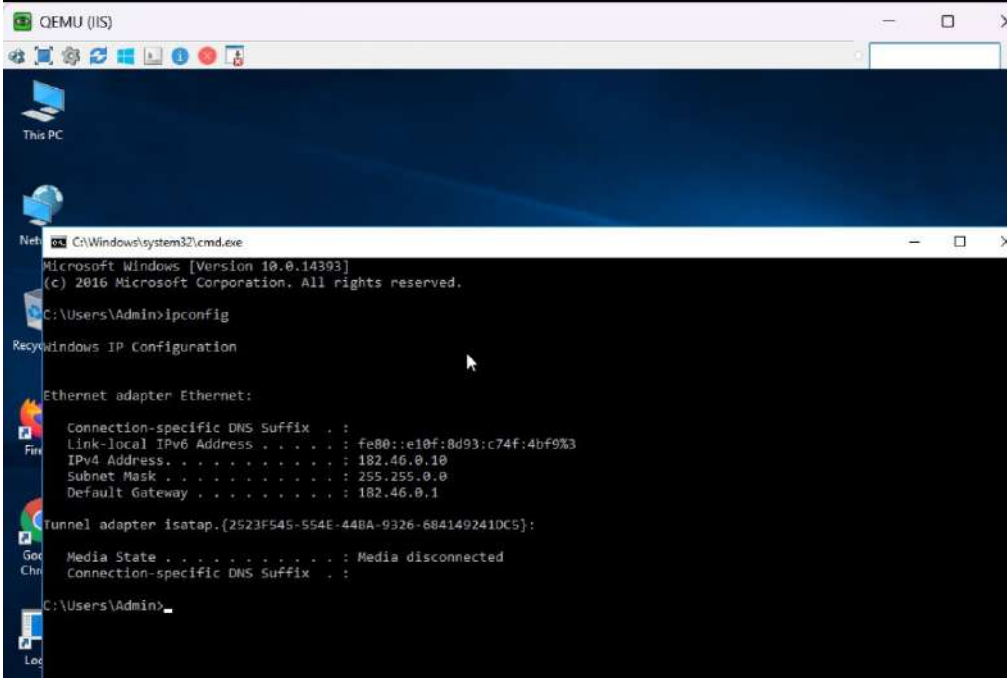

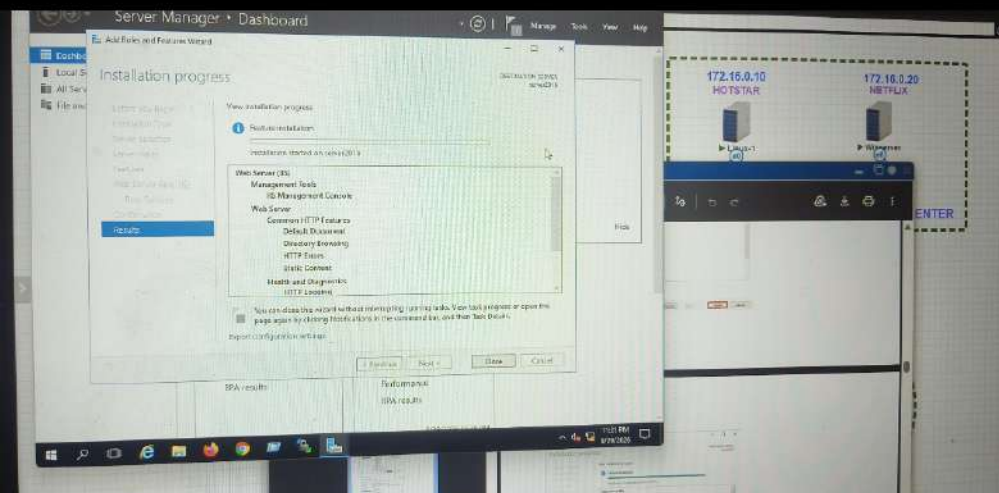

QEMU (IIS)

Server Manager

Server Manager • Dashboard

ManageToolsViewHelp

Dashboard

Local Server

All Servers

File and Storage Services >

IIS

WELCOME TO SERVER MANAGER

QUICK START

WHAT'S NEW

LEARN MORE

1

Configure this local server

2

Add roles and features

3

Add other servers to manage

4

Create a server group

5

Connect this server to cloud services

Hide

ROLES AND SERVER GROUPS

Roles: 2 | Server groups: 1 | Servers total: 1

File and Storage Services

1

Manageability

Events

Performance

BPA results

IIS

1


Manageability

Events

Services

Performance

BPA results

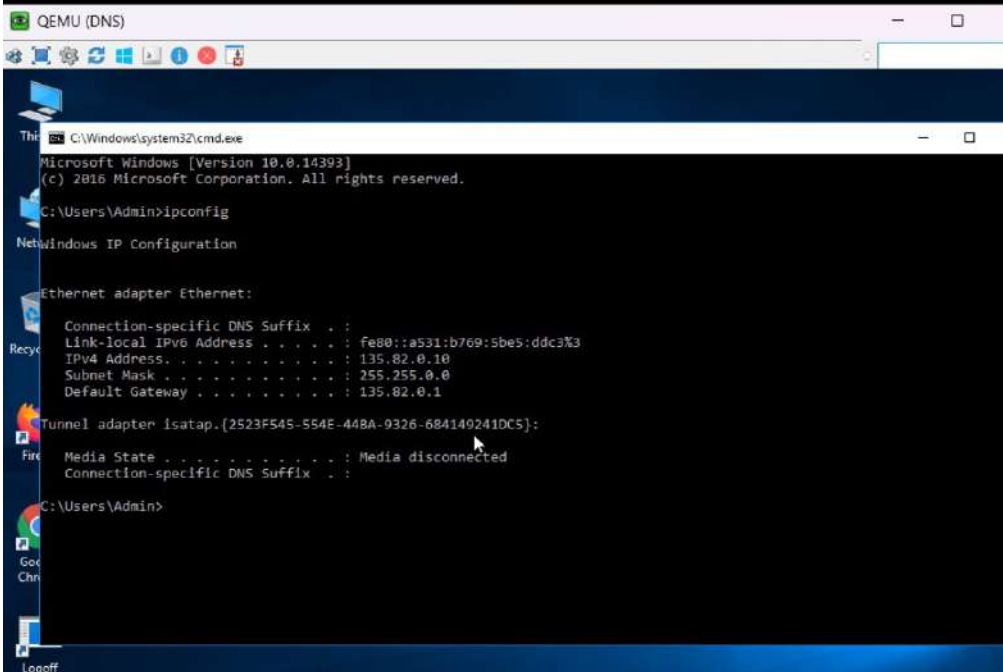

MO (DNS)



Add Roles and Features Wizard

Installation progress

- Before you begin
- Installation Type
- Server Selection
- Server Roles
- Features
- DNS Server
- Confirmation
- Results**

View installation progress



Feature installation

Installation started on server2016

DNS Server
Remote Server Administration Tools
Role Administration Tools
DNS Server Tools



You can close this wizard without interrupting running tasks. View task progress on the taskbar again by clicking Notifications in the command bar, and then Task Details.

Export configuration settings

< Previous

Next >

Close

Performance
BPA results

1

Services

Performance
BPA results

8/20/2016 11:27 PM

QEMU (DNS)

Server Manager

Server Manager Dashboard

Dashboard

Local Server

All Servers

DNS

File and Storage Services

WELCOME TO SERVER MANAGER

QUICK START

WHAT'S NEW

LEARN MORE

1

Configure this local server

2

Add roles and features

3

Add other servers to manage

4

Create a server group

5

Connect this server to cloud services

Hide

ROLES AND SERVER GROUPS

Roles: 2 | Server groups: 1 | Servers total: 1

DNS

1

Manageability

Events

Services

Performance

BPA results

File and Storage Services


1

Manageability

Events

Performance

BPA results



QEMU (DNS)

Server Manager

DNS Manager

File Action View Help

DNS

- SERVER2016
 - Forward Lookup Zones
 - com
 - hotstar
 - Netflix
 - (same as parent folder)
 - (same as parent folder)
 - Reverse Lookup Zones
 - Trust Points
 - Conditional Forwarders

Name	Type	Data
hotstar		
Netflix		
(same as parent folder)	Start of Authority (SOA)	[5], server2016, hostmaster, server2016.
(same as parent folder)	Name Server (NS)	

Hide

