



10,000 RS

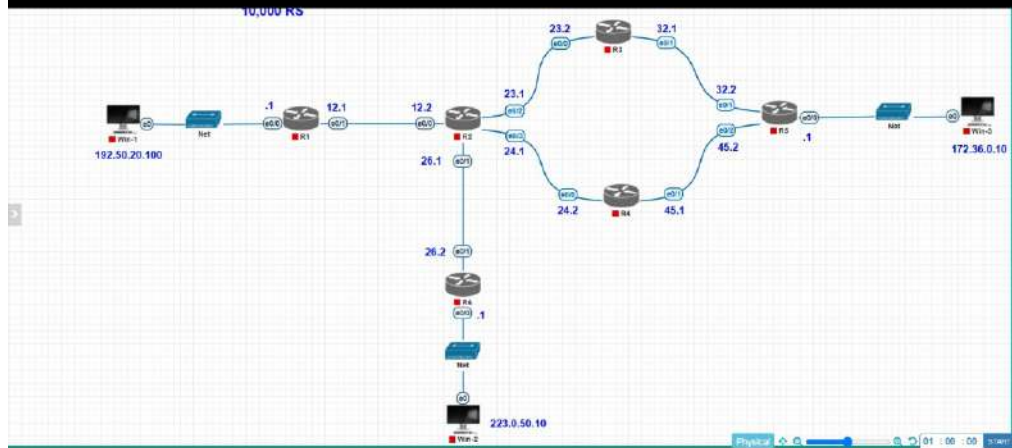

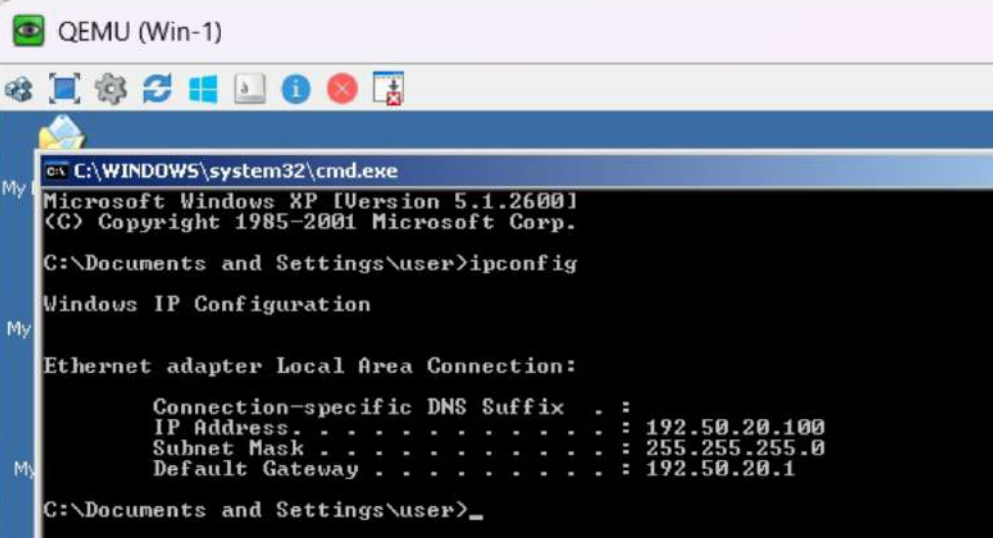

```
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 192.50.20.100
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.50.20.1

C:\Documents and Settings\user>_
```

QEMU (Win-2)



My Documents

My Computer

My Network Places

Recycle Bin

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.


C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 223.0.50.10
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 223.0.50.1

C:\Documents and Settings\user>
```

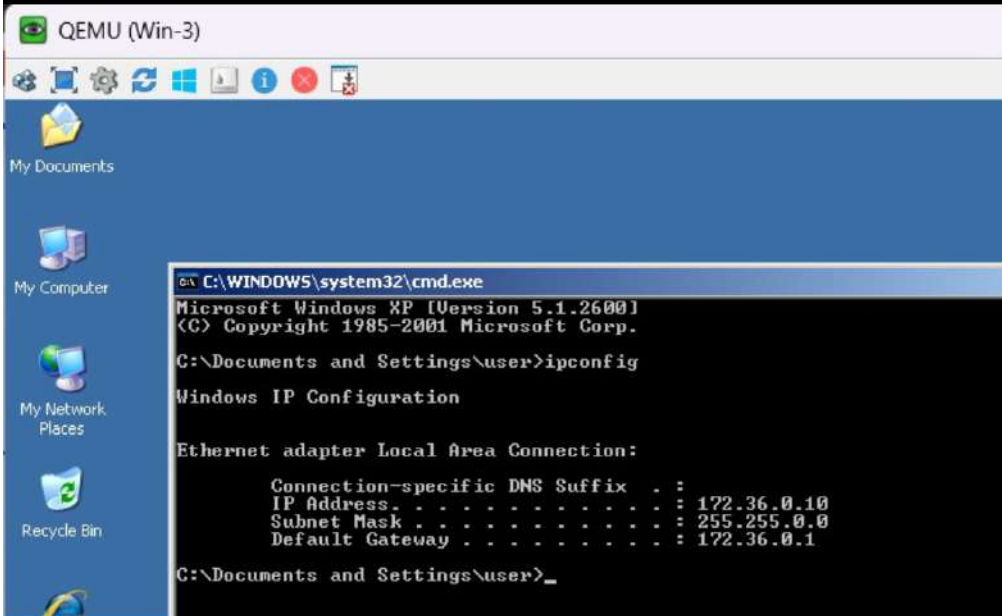

R1

```
R1#show ip int br
Interface                               IP-Address    OK? Method Status    Prot
ocol
Ethernet0/0                             192.50.20.1   YES manual up        up
Ethernet0/1                             12.0.0.1      YES manual up        up
Ethernet0/2                             unassigned    YES TFTP  down      down
Ethernet0/3                             unassigned    YES TFTP  down      down

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       12.0.0.0/8 is directly connected, Ethernet0/1
L       12.0.0.1/32 is directly connected, Ethernet0/1
S       23.0.0.0/8 [1/0] via 12.0.0.2
S       24.0.0.0/8 [1/0] via 12.0.0.2
S       26.0.0.0/8 [1/0] via 12.0.0.2
S       32.0.0.0/8 [1/0] via 12.0.0.2
S       45.0.0.0/8 [1/0] via 12.0.0.2
S       172.36.0.0/16 [1/0] via 12.0.0.2
    192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.50.20.0/24 is directly connected, Ethernet0/0
L       192.50.20.1/32 is directly connected, Ethernet0/0
S       223.0.50.0/24 [1/0] via 12.0.0.2
R1#
```

```

R2
R2#show ip int br
Interface                IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0              12.0.0.2        YES manual up          up
Ethernet0/1              26.0.0.1        YES manual up          up
Ethernet0/2              23.0.0.1        YES manual up          up
Ethernet0/3              24.0.0.1        YES manual up          up

R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       12.0.0.0/8 is directly connected, Ethernet0/0
L       12.0.0.2/32 is directly connected, Ethernet0/0
    23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       23.0.0.0/8 is directly connected, Ethernet0/2
L       23.0.0.1/32 is directly connected, Ethernet0/2
    24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       24.0.0.0/8 is directly connected, Ethernet0/3
L       24.0.0.1/32 is directly connected, Ethernet0/3
    26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       26.0.0.0/8 is directly connected, Ethernet0/1
L       26.0.0.1/32 is directly connected, Ethernet0/1
S       32.0.0.0/8 [1/0] via 23.0.0.2
S       45.0.0.0/8 [1/0] via 23.0.0.2
S       172.36.0.0/16 [1/0] via 24.0.0.2
           [1/0] via 23.0.0.2
S       192.50.20.0/24 [1/0] via 12.0.0.1
S       223.0.50.0/24 [1/0] via 26.0.0.2
R2#

```

R3

R3#show ip int br

Interface	IP-Address	OK?	Method	Status	Prot
Ethernet0/0	23.0.0.2	YES	manual	up	up
Ethernet0/1	32.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

R3#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 23.0.0.1
23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 23.0.0.0/8 is directly connected, Ethernet0/0
L 23.0.0.2/32 is directly connected, Ethernet0/0
S 24.0.0.0/8 [1/0] via 23.0.0.1
S 26.0.0.0/8 [1/0] via 23.0.0.1
32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 32.0.0.0/8 is directly connected, Ethernet0/1
L 32.0.0.1/32 is directly connected, Ethernet0/1
S 45.0.0.0/8 [1/0] via 32.0.0.2
S 172.36.0.0/16 [1/0] via 32.0.0.2
S 192.50.20.0/24 [1/0] via 23.0.0.1
S 223.0.50.0/24 [1/0] via 32.0.0.2

R3#

R3#

```

R4#show ip int br
Interface                               IP-Address    OK? Method Status    Prot
ocol
Ethernet0/0                             24.0.0.2      YES manual  up        up
Ethernet0/1                             45.0.0.1      YES manual  up        up
Ethernet0/2                             unassigned    YES TFTP    down      down
Ethernet0/3                             unassigned    YES TFTP    down      down

R4#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 24.0.0.1
S    23.0.0.0/8 [1/0] via 24.0.0.1
C    24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
     C    24.0.0.0/8 is directly connected, Ethernet0/0
     L    24.0.0.2/32 is directly connected, Ethernet0/0
S    26.0.0.0/8 [1/0] via 24.0.0.1
S    32.0.0.0/8 [1/0] via 45.0.0.2
C    45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
     C    45.0.0.0/8 is directly connected, Ethernet0/1
     L    45.0.0.1/32 is directly connected, Ethernet0/1
S    172.36.0.0/16 [1/0] via 45.0.0.2
S    192.36.0.0/24 [1/0] via 24.0.0.1
S    192.50.0.0/24 [1/0] via 45.0.0.2
     [1/0] via 24.0.0.1
S    223.0.50.0/24 [1/0] via 24.0.0.1
R4#

```

R5

```
R5#show ip int br
Interface                               IP-Address    OK? Method Status    Prot
ocol
Ethernet0/0                             172.36.0.1    YES manual up        up
Ethernet0/1                             32.0.0.2      YES manual up        up
Ethernet0/2                             45.0.0.2      YES manual up        up
Ethernet0/3                             unassigned    YES TFTP  down      down

R5#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 32.0.0.1
S    23.0.0.0/8 [1/0] via 32.0.0.1
S    24.0.0.0/8 [1/0] via 45.0.0.1
S    26.0.0.0/8 [1/0] via 32.0.0.1
     32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     32.0.0.0/8 is directly connected, Ethernet0/1
L     32.0.0.2/32 is directly connected, Ethernet0/1
     45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     45.0.0.0/8 is directly connected, Ethernet0/2
L     45.0.0.2/32 is directly connected, Ethernet0/2
     172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C     172.36.0.0/16 is directly connected, Ethernet0/0
L     172.36.0.1/32 is directly connected, Ethernet0/0
S    192.50.0.0/24 [1/0] via 45.0.0.1
           [1/0] via 32.0.0.1
S    192.50.20.0/24 [1/0] via 32.0.0.1
S    223.0.50.0/24 [1/0] via 45.0.0.1
R5#
```

```

R6#show ip int br
Interface                               IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0                             223.0.50.1      YES manual up          up
Ethernet0/1                             26.0.0.2        YES manual up          up
Ethernet0/2                             unassigned      YES TFTP  down        down
Ethernet0/3                             unassigned      YES TFTP  down        down

R6#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 26.0.0.1
S    23.0.0.0/8 [1/0] via 26.0.0.1
S    24.0.0.0/8 [1/0] via 26.0.0.1
     26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     26.0.0.0/8 is directly connected, Ethernet0/1
L     26.0.0.2/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 26.0.0.1
S    45.0.0.0/8 [1/0] via 26.0.0.1
S    172.36.0.0/16 [1/0] via 26.0.0.1
S    192.50.20.0/24 [1/0] via 26.0.0.1
     223.0.50.0/24 is variably subnetted, 2 subnets, 2 masks
C     223.0.50.0/24 is directly connected, Ethernet0/0
L     223.0.50.1/32 is directly connected, Ethernet0/0
R6#
R6#

```

