


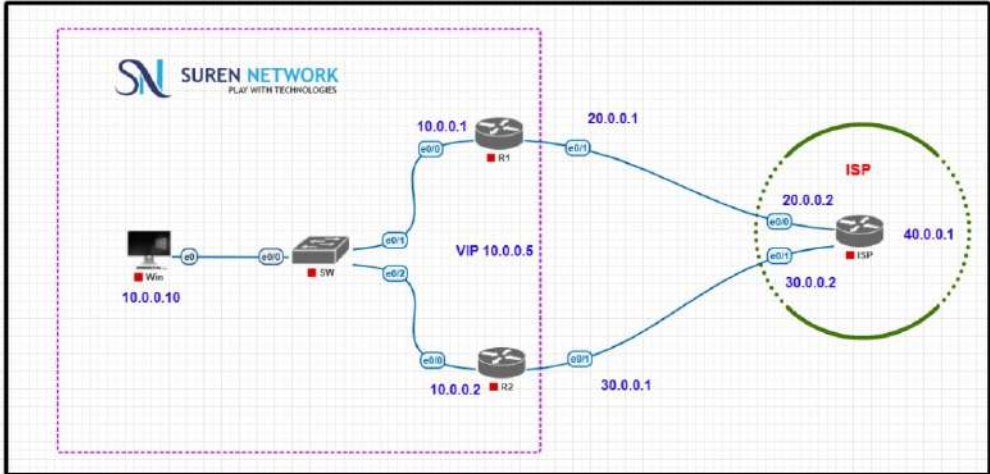

```

R1
R1(config)#
R1(config)#
R1(config)#int e0/0
R1(config-if)#standby 1 ip 10.0.0.5
R1(config-if)#exit
R1(config)#
R1(config)#
R1(config)#
R1(config)#exit
R1#
R1#
R1#show
*Sep 27 16:47:28.084: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip int br
Interface                IP-Address      OK? Method Status      Prot
-----
o0c1
Ethernet0/0              10.0.0.1        YES TFTP   up          up
Ethernet0/1              20.0.0.1        YES TFTP   up          up
Ethernet0/2              unassigned      YES TFTP   administratively down down
Ethernet0/3              unassigned      YES TFTP   administratively down down
NVI0                     10.0.0.1        YES unset  up          up
R1#
*Sep 27 16:47:39.236: %HSRP-5-STATECHANGE: Ethernet0/0 Grp 1 state Standby -> Active
R1#
R1#
R1#show standby
Ethernet0/0 - Group 1
  State is Active
    2 state changes, last state change 00:02:19
  Virtual IP address is 10.0.0.5
  Active virtual MAC address is 0000.0c07.ac01
    Local virtual MAC address is 0000.0c07.ac01 (v1 default)
  Hello time 3 sec, hold time 10 sec
    Next hello sent in 0.480 secs
  Preemption disabled
  Active router is local
  Standby router is 10.0.0.2, priority 100 (expires in 10.608 sec)
  Priority 100 (default 100)
  Group name is "hsrp-Et0/0-1" (default)
R1#
R1#

```

```

R2#
R2#
R2#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#
R2(config)#int e0/0
R2(config-if)#standby 1 ip 10.0.0.5
R2(config-if)#exit
R2(config)#
R2(config)#exit
R2#
R2#
R2#show
*Sep 27 16:49:05.834: %SYS-5-CONFIG_I: Configured from console by console
R2#show ip int br
Interface IP-Address OK? Method Status Prot
ocol
Ethernet0/0 10.0.0.2 YES TFTP up up
Ethernet0/1 30.0.0.1 YES TFTP up up
Ethernet0/2 unassigned YES TFTP administratively down down
Ethernet0/3 unassigned YES TFTP administratively down down
NVI0 10.0.0.2 YES unset up up
R2#
R2#
R2#show
*Sep 27 16:49:20.288: %HSRP-5-STATECHANGE: Ethernet0/0 Grp 1 state Speak -> Standby
R2#show standby
Ethernet0/0 - Group 1
State is Standby
1 state change, last state change 00:00:10
Virtual IP address is 10.0.0.5
Active virtual MAC address is 0000.0c07.ac01
Local virtual MAC address is 0000.0c07.ac01 (vl default)
Hello time 3 sec, hold time 10 sec
Next hello sent in 0.880 secs
Preemption disabled
Active router is 10.0.0.1, priority 100 (expires in 9.280 sec)
Standby router is local
Priority 100 (default 100)
Group name is "hsrp-Et0/0-1" (default)
R2#

```

