
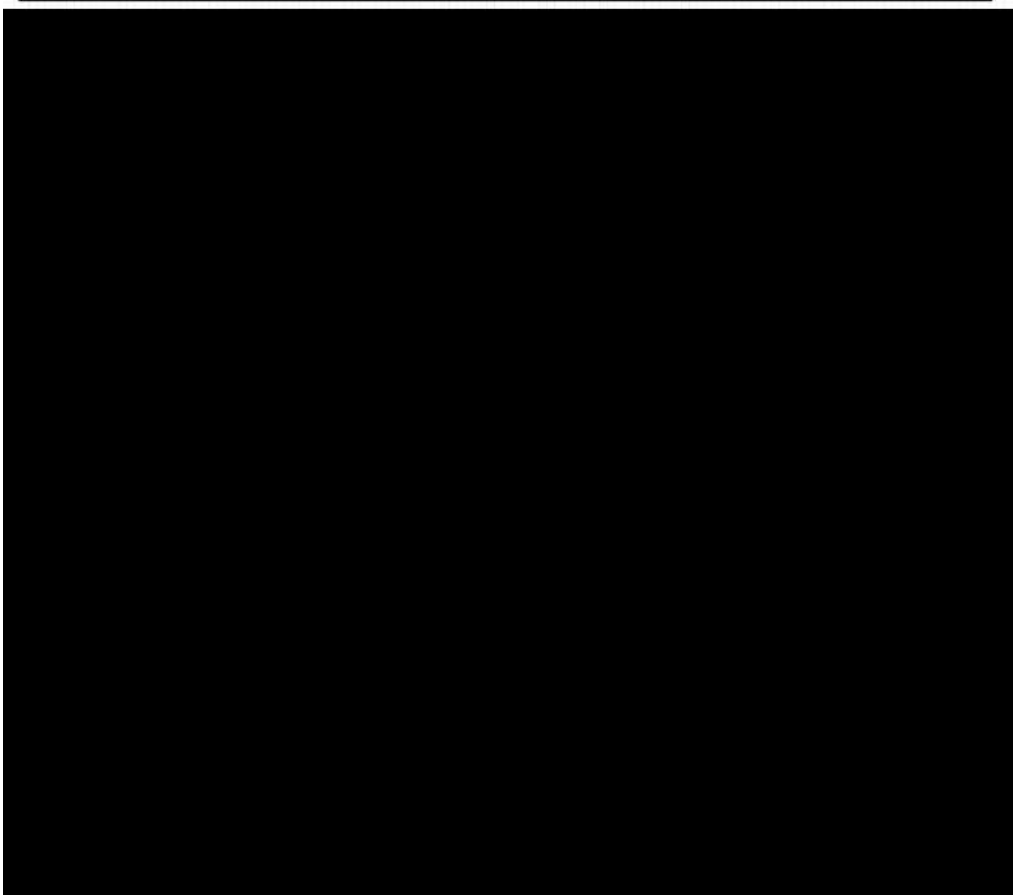
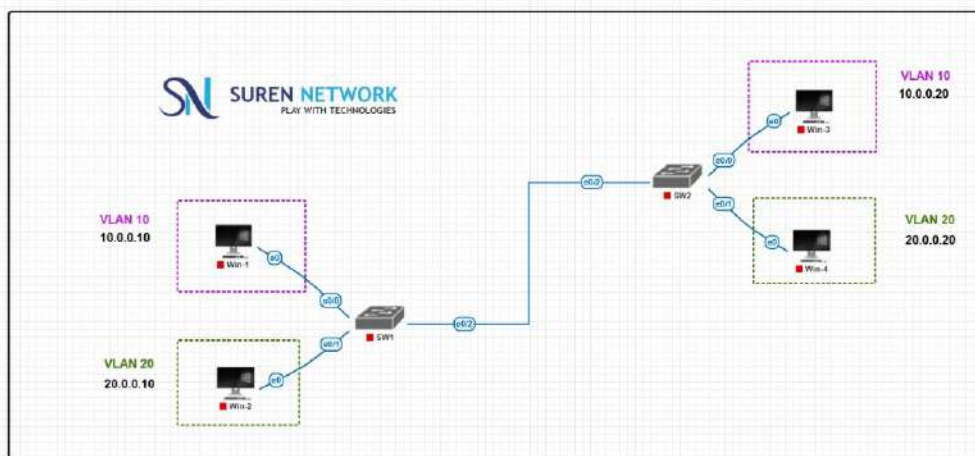




```

*Sep 15 06:16:01.282: %LINK-3-UPDOWN: Interface Ethernet0/3, changed state to do
wn
*Sep 15 06:16:02.282: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
3, changed state to down
SW1#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
SW1(config)#
SW1(config)#vlan 10
SW1(config-vlan)#name HR
SW1(config-vlan)#exit
SW1(config)#vlan 20
SW1(config-vlan)#name SALES
SW1(config-vlan)#exit
SW1(config)#
SW1(config)#int e0/0
SW1(config-if)#switchport access vlan 10
SW1(config-if)#exit
SW1(config)#int e0/1
SW1(config-if)#switchport access vlan 20
SW1(config-if)#
^
% Invalid input detected at '^' marker.

SW1(config-if)#exit
SW1(config)#
SW1(config)#
SW1(config)#int e0/1
SW1(config-if)#switchport access vlan 20
SW1(config-if)#exit
SW1(config)#
SW1(config)#
SW1(config)#exit
SW1#
SW1#
SW1#
*Sep 15 06:18:15.693: %SYS-5-CONFIG_I: Configured from console by console
SW1#show vlan brief

VLAN Name                Status    Ports
-----
1    default                active    Et0/2, Et0/3
10   HR                      active    Et0/0
20   SALES                   active    Et0/1

```

SW2

```
SW2#
SW2#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
SW2(config)#
SW2(config)#
SW2(config)#vlan 10
SW2(config-vlan)#name HR
SW2(config-vlan)#exit
SW2(config)#vlan 20
SW2(config-vlan)#name SALES
SW2(config-vlan)#exit
SW2(config)#
SW2(config)#int e0/0
SW2(config-if)#switchport access vlan 10
SW2(config-if)#exit
SW2(config)#
SW2(config)#int e0/1
SW2(config-if)#switchport access vlan 20
SW2(config-if)#exit
SW2(config)#
SW2(config)#
SW2(config)#int e0/2
SW2(config-if)#switchport trunk encapsulation dot1q
SW2(config-if)#switchport mode trunk
SW2(config-if)#exit
SW2(config)#
SW2(config)#
SW2(config)#exit
SW2#show
*Sep 15 06:29:14.586: %SYS-5-CONFIG_I: Configured from console by console
SW2#show interface trunk

Port      Mode           Encapsulation  Status        Native vlan
Et0/2     on             802.1q         trunking      1

Port      Vlans allowed on trunk
Et0/2     1-4094

Port      Vlans allowed and active in management domain
Et0/2     1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Et0/2     1,10,20
SW2#
SW2#
SW2#
```

