Design and Configure an internetwork using wireless router DHCP server and internet cloud

EXT NO: 10b
Date: 3/10/26

Aim:


To design and Configure an internetwork using wireless router, DHCP server and internet cloud in cisco packet Tracer.

Procedure:

- Open cisco packet tracer and create the required network topology.
- Connect PC, laptop, wireless router, cable modem, Internet cloud and Server.
- Configure the wireless router with SSID homenetwork and enable DHCP
- Connect the laptop to the wireless network and PC to DHCP.
- Configure the server with IP 208.67.220.220 and enable DHCP and DNS.
- Verify connectivity using ip config and ping cisco.com

Result:

The Internetwork was successfully designed and Configured using a wireless router, DHCP server and Internet cloud. Connectivity was verified by pinging cisco.com.

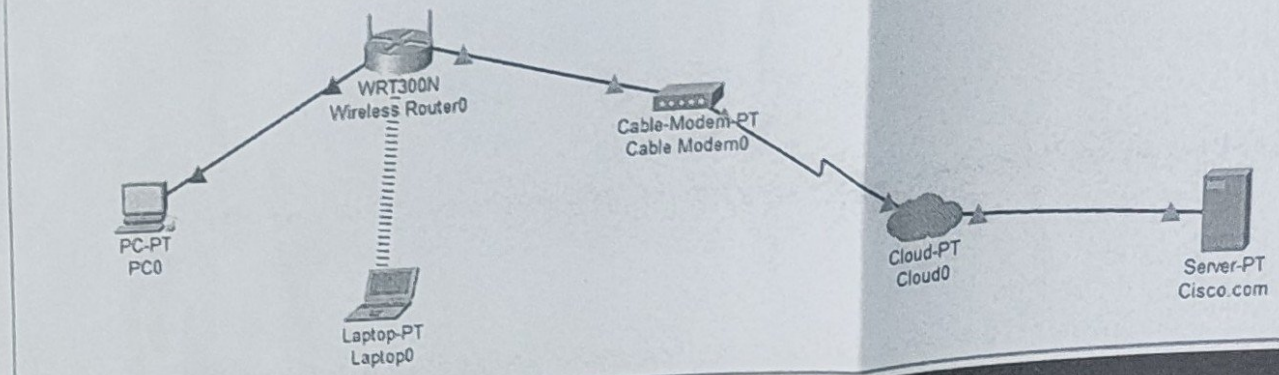


```
C:\>ping Cisco.com

Pinging 208.67.220.220 with 32 bytes of data:

Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=18ms TTL=127

Ping statistics for 208.67.220.220:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 18ms, Average = 5ms

C:\>
```