Simulate static routing configuration using Cisco Packet Tracer.

EXP NO: 11 a


Date : 3/10/26

Aim:

To simulate static routing configuration using Cisco Packet Tracer.

Procedure:

- Open Cisco Packet Tracer and create the given network topology.
- Connect 3 routers and PC's using suitable cable.
- Configure IP address for routers and PC's
- Enable all router interface using no shutdown
- Set main and backup paths using different administrative distance values.
- Test connectivity.
- Use tracert to verify the routing path
- Disconnect the main link and verify that the backup router works.
- Thus a static routing is successfully configured and verified.

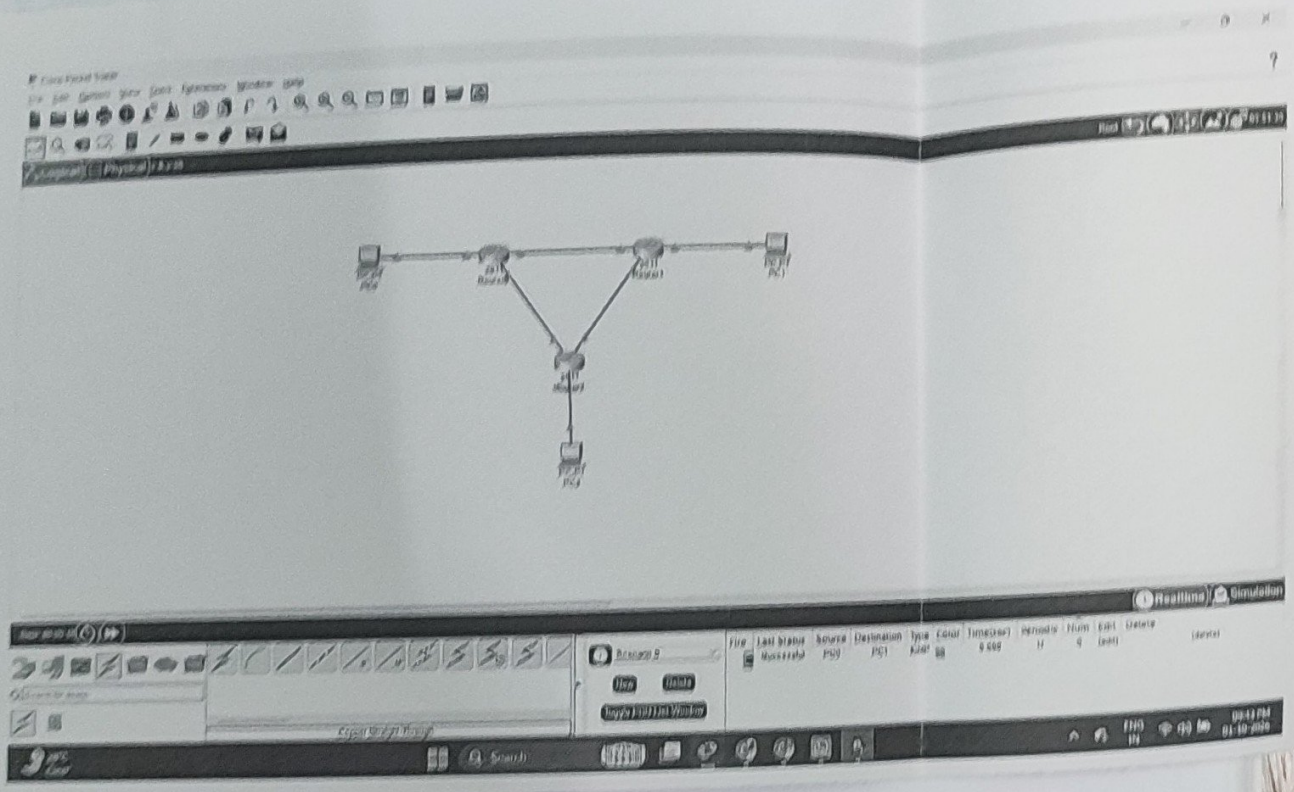

```
C:\>ping 30.0.0.100

Pinging 30.0.0.100 with 32 bytes of data:

Reply from 30.0.0.100: bytes=32 time<1ms TTL=126
Reply from 30.0.0.100: bytes=32 time<1ms TTL=126
Reply from 30.0.0.100: bytes=32 time<1ms TTL=126
Reply from 30.0.0.100: bytes=32 time<1ms TTL=126

Ping statistics for 30.0.0.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>tracert 30.0.0.100

Tracing route to 30.0.0.100 over a maximum of 30 hops:

  1    0 ms      3 ms      0 ms      10.0.0.1
  2    *         *         *         Request timed out.
  3    0 ms      0 ms      0 ms      20.0.0.2
  4    0 ms      0 ms      0 ms      30.0.0.100

Trace complete.
```