Simulate RIP using CISCO packet Tra


EXP NO: 11 b
Date : 3/10/26


Aim:


To simulate RIP using (3 routers and 2PC's) cisco Packet tracer.

Procedure:

- Create the topology with 3 routers and 2PC's
- Connect the device using suitable cable
- Assign the given IP address to bot PC's
- Configure fastEthernet and serial interf of all routers
- Enable interface using no shutdown
- Enable RIP on all routers using router RIP
- Add directly connected network using the network command.
- Test connectivity using ping 20.0.0.2
- Use tracer to 20.0.0.2 to verify the selected route.
- Disconnect the direct router 0 - router 2 link and use tracert again to verify RIP selects the alternate route.

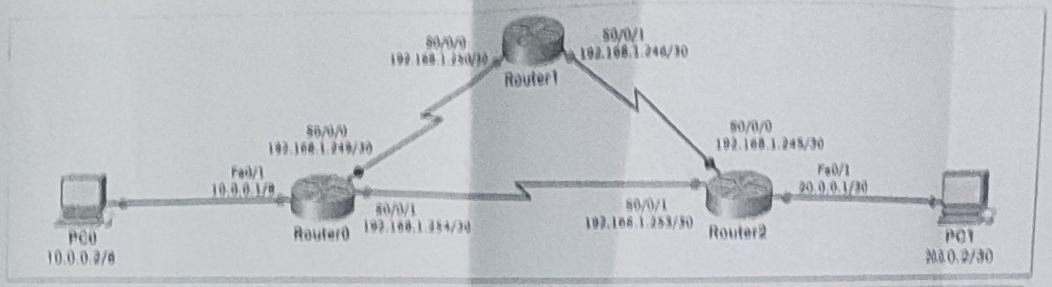

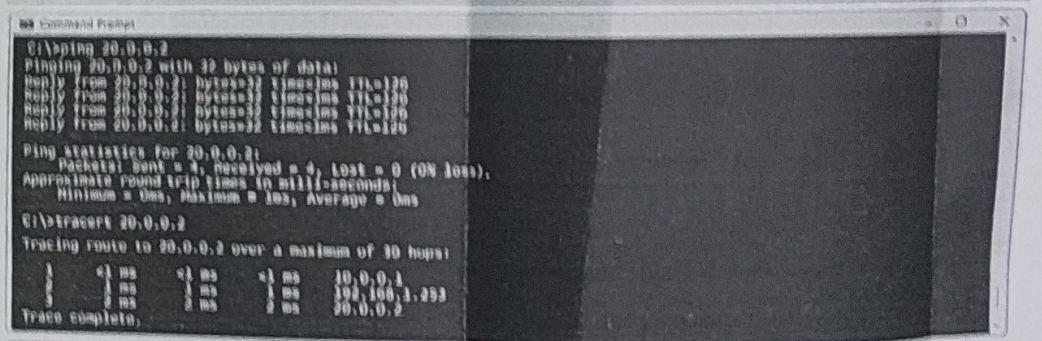

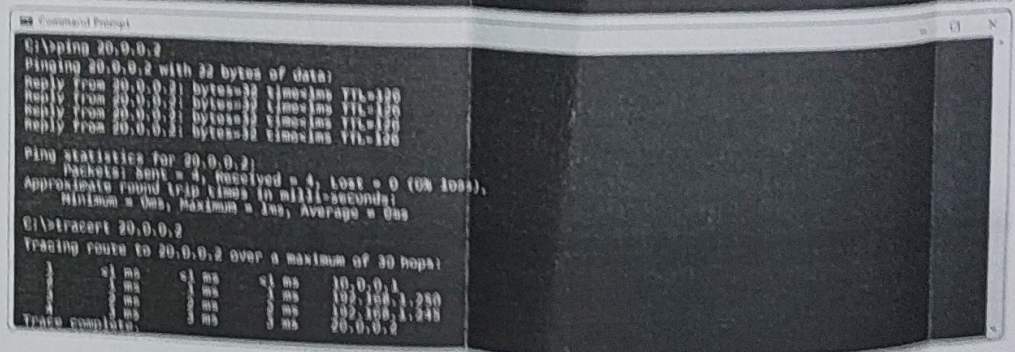

RESULT:

Thus RIP using CISCO packet Tracer has been studied.