Aim

Study of different types of network Cable

a) Understand different types of network cables

Different type of cables used in networking are:



1. Unshielded Twisted Pair (UTP) Cable
2. Shielded Twisted Pair (STP) Cable
3. Coaxial Cable
4. Fibre optic Cable

b) Make Your Own Ethernet Cross-Over Cable / Straight cable

Tools and parts needed:

* Ethernet Cabling. CAT5e is certified for gigabit support, but CAT5 Cabling works as well. Just over shorter distances

* A Crimping tool. This is an all-in-one networking tool shaped to push down the pins in the plugs and strip and cut the shielding off the Cable

Cable type	Category	Maximum Data Transmission	Advantages/ Disadvantages	Application/Use	Image
UTP	Category 3	10 bps	**Advantages** • Cheaper in cost • Easy to install as they have a smaller overall diameter. **Disadvantages** • More prone to (EMI) Electromagnetic interference and noise	10Base-T Ethernet	
	Category 5	Up to 100 Mbps		Fast Ethernet, Gigabit Ethernet	
	Category 5e	1Gbps		Fast Ethernet, Gigabit Ethernet	
STP	Category6,6a	10Gbps	**Advantages** • Shielded. • Faster than UTP. • Less susceptible to noise and interference **Disadvantages** • Expensive • Greater installation effort	Gigabit Ethernet, 10G Ethernet (55m) Widely used in data centres	
SSTP	Category 7	10Gbps		Gigabit Ethernet, 10G Ethernet (100m)	

Coaxial cable	RG-6 RG-59 RG-11	10-100Mbps	• High bandwidth • Immune to interference • Low loss bandwidth • Versatile • **Disadvantages** • Limited distance • Cost • Size is bulky	Speed of signal is 500m Television network High speed internet connections	
fibre optics cable	Single mode Multi mode	100Gbps	**Advantages** • High speed • High bandwidth • High security • Long distance **Disadvantages** • Expensive • Requires skilled installers	• Maximum distance of fibre optics cable is around 100meters	

* Two RJ45 plugs
* Optional two plug shields


Procedure


Step 1: To start Construction of the device, begin by threading shields onto the Cable.

Step 2: Next, strip approximately 1.5cm of cable shielding from both ends. The Crimping tool has a round area to Complete this task.

Step 3: After, you will need to untangle the wires; there should be four "twisted pairs". Referencing back to the sheet, arrange them from top to bottom. One end should be in arrangement A and the other in B.

Step 4: Once the order is Correct, bunch them together in a line, and if there are any that stick out further than others, snip them back to Create an even level. The difficult aspect is Placing these into the RJ45 plug without messing up the order. To do so, hold the plug

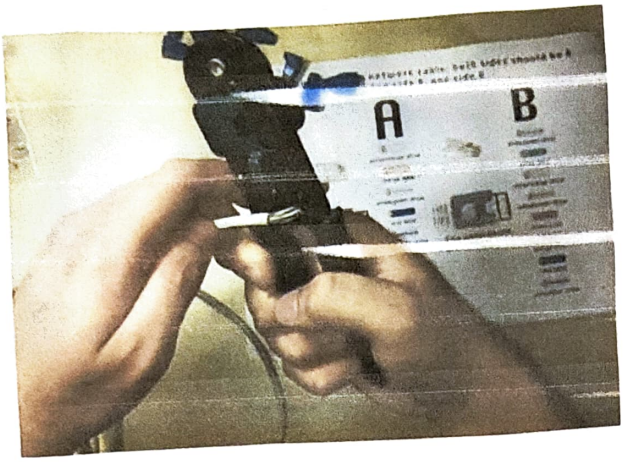

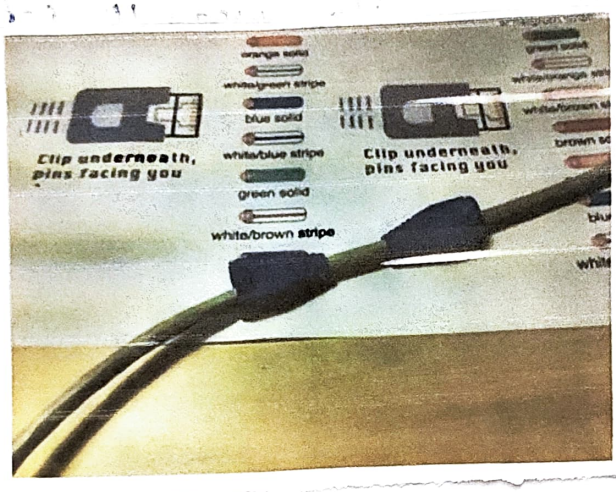

PC0

Physical Config Desktop Custom Interface

IP Configuration

IP Configuration

DHCP Static

IP Address	10.1.1.1
Subnet Mask	255.0.0.0
Default Gateway	
DNS Server	

IPv6 Configuration

DHCP Auto Config Static

IPv6 Address	
Link Local Address	FE80::2D0:97FF:FED5:2EB5
IPv6 Gateway	
IPv6 DNS Server	

with the clip side facing away from you and have the gold pins facing towards you.

Step5: Next, push the cable right in. the notch at the end of the plug needs to be just over the cable shielding and if it isn't that means that you stripped off too much shielding. Simply strip the cables back a little more

Step6: After the wires are securely sitting inside the plug, insert it into the crimping tool and push down.


It should be shaped correctly, but pushing too hard can crack the fragile plastic plug.


Step7:


Lastly, repeat for the other end using diagram A using diagram

B- to make a crossover cables


A- to make a straight through cables

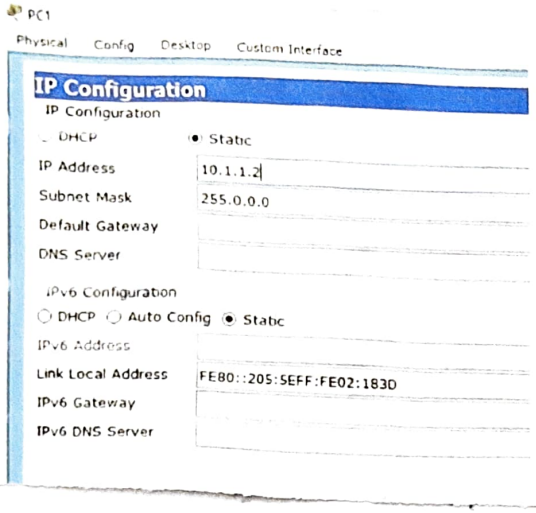


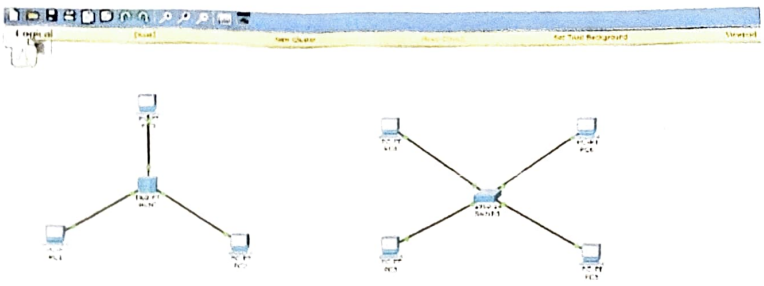

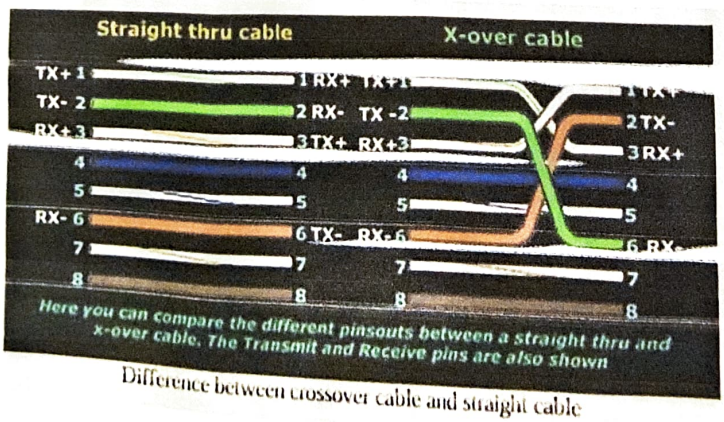

Difference between crossover cable and straight cable

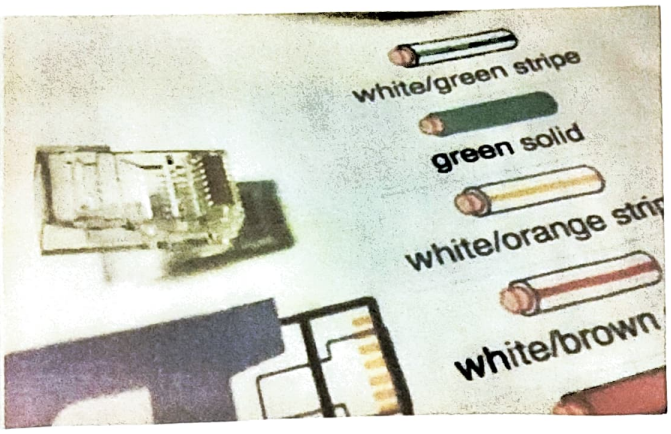


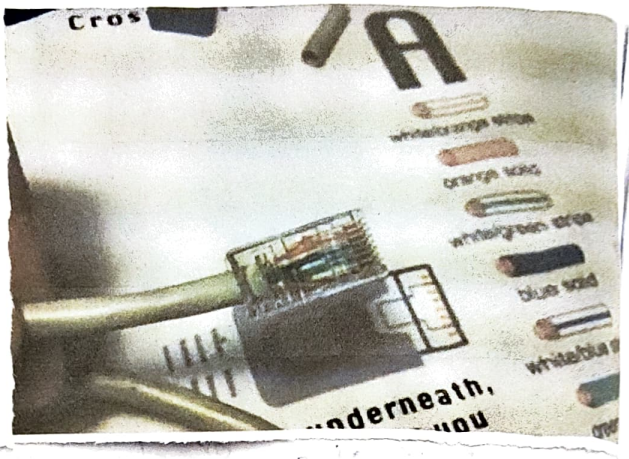



Take a print out the diagram below or have it handy as a reference

Straight through network cable: both sides should be A
Crossover cable: One side A, one side B

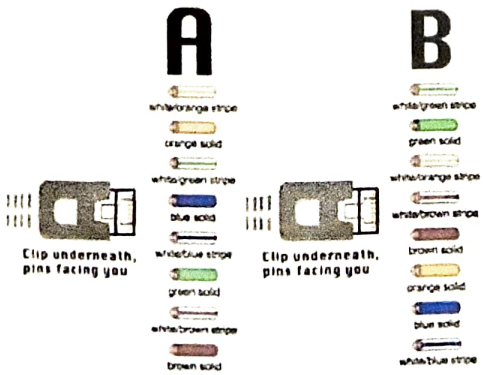

Result:

Thus the study of different type of network cables is done successfully.