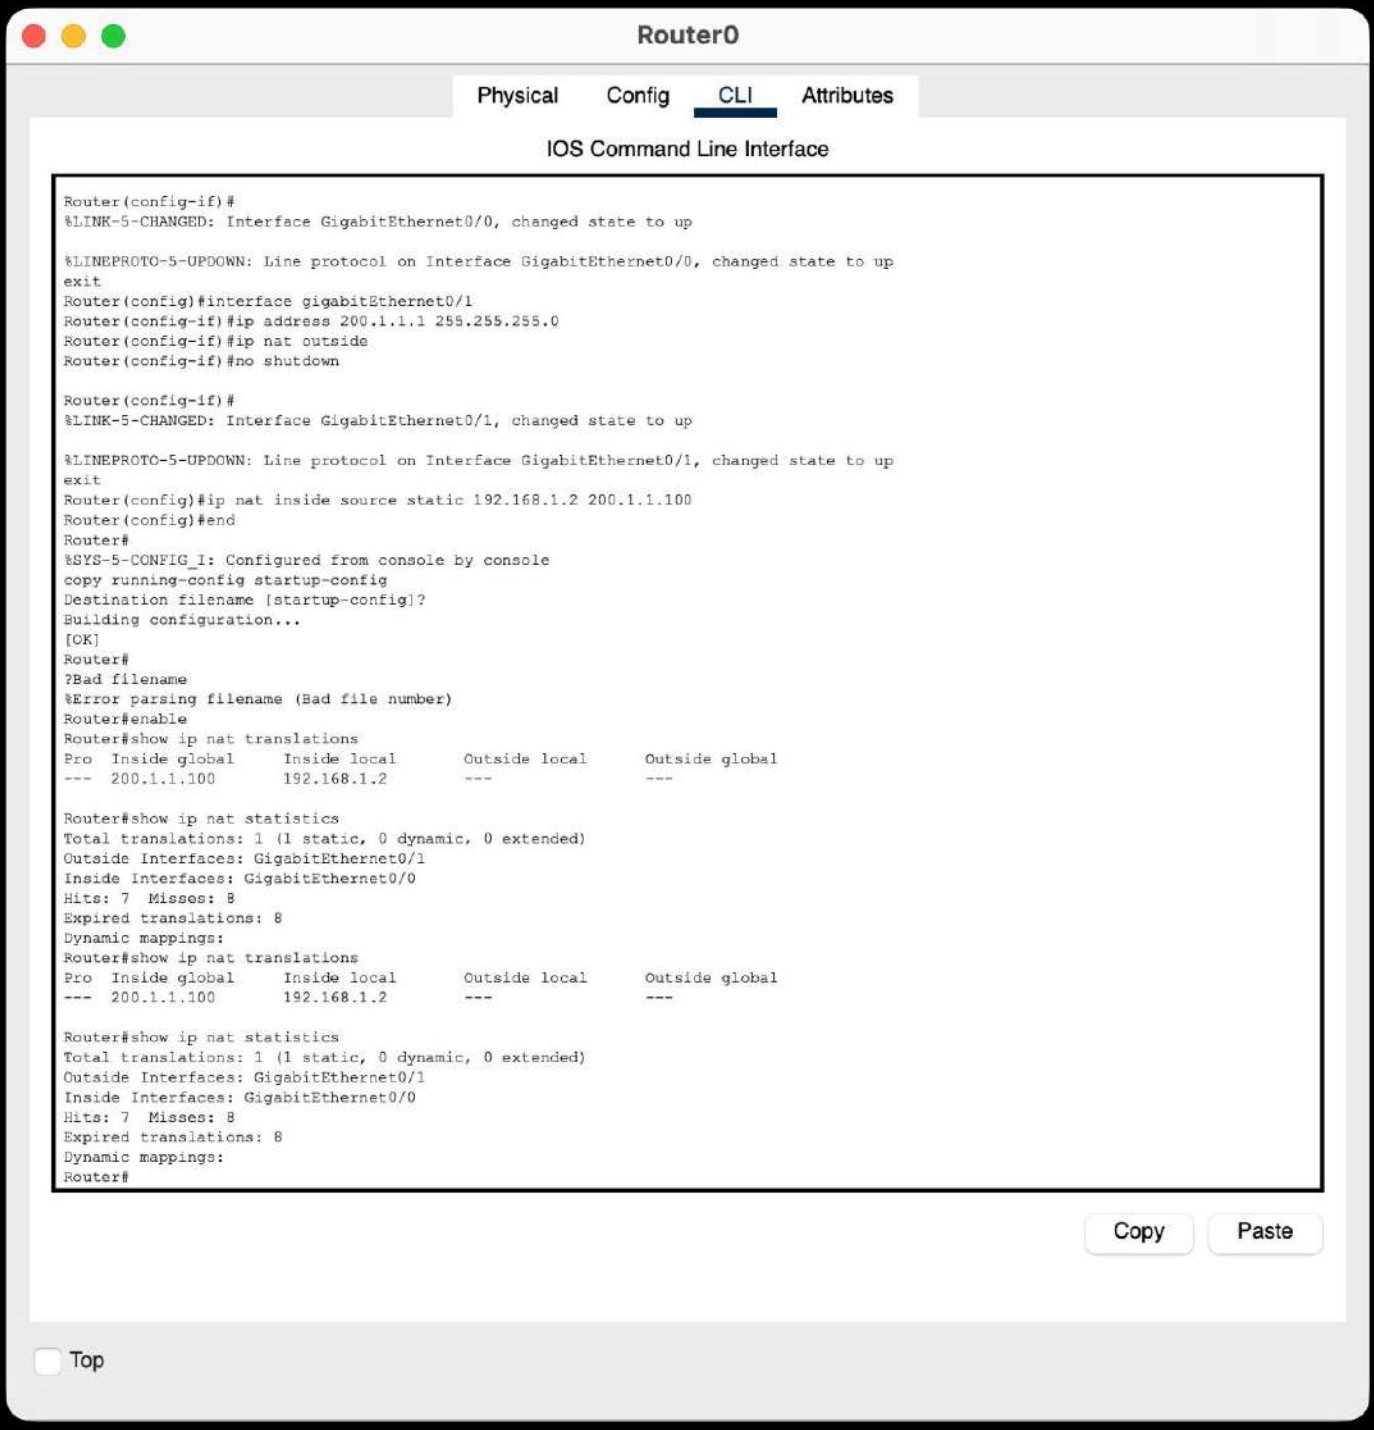
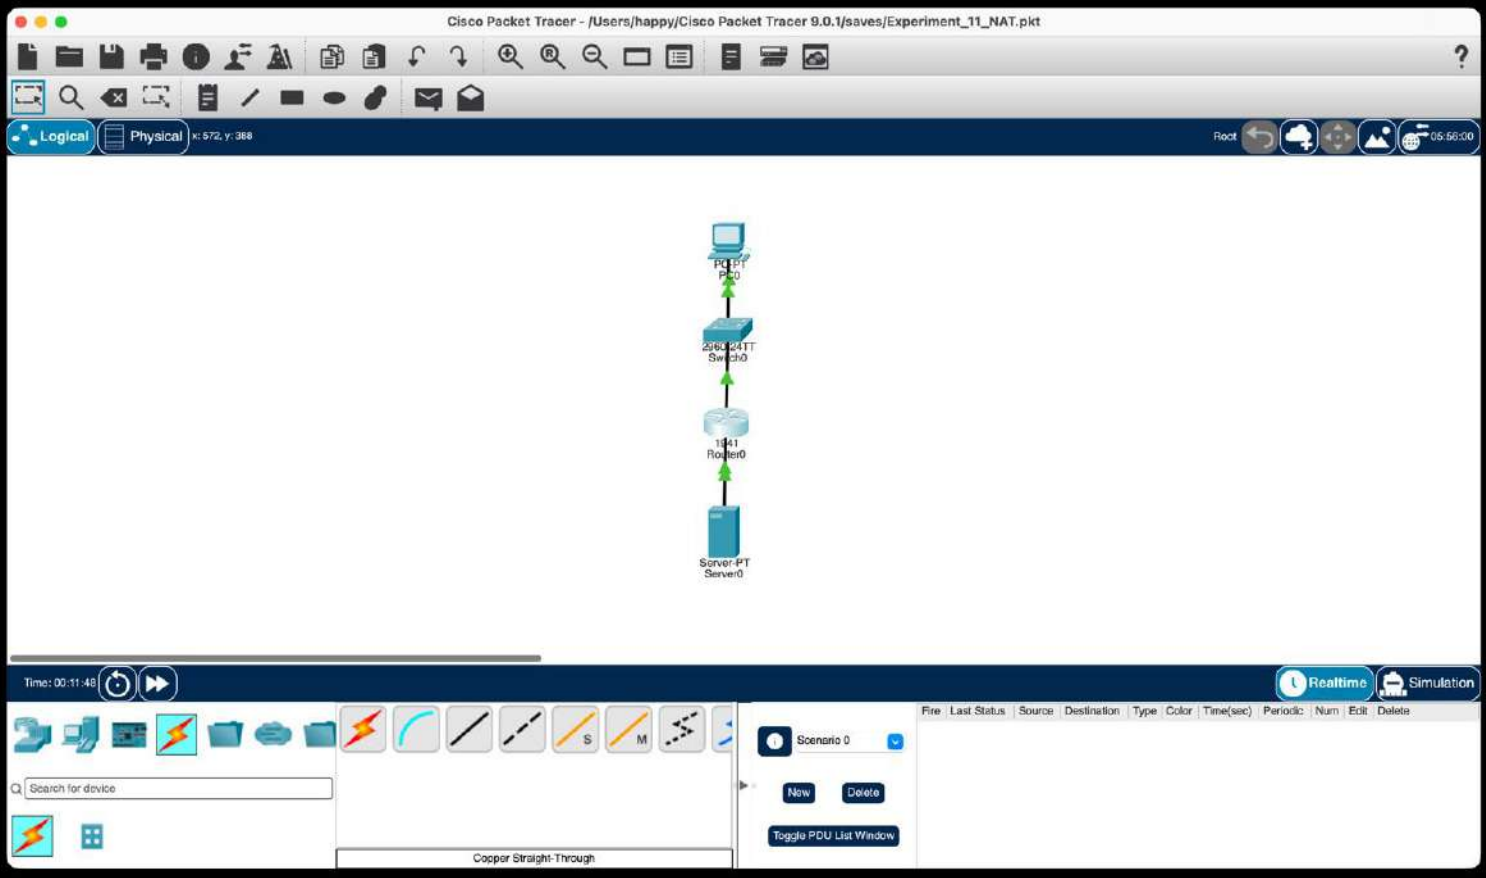
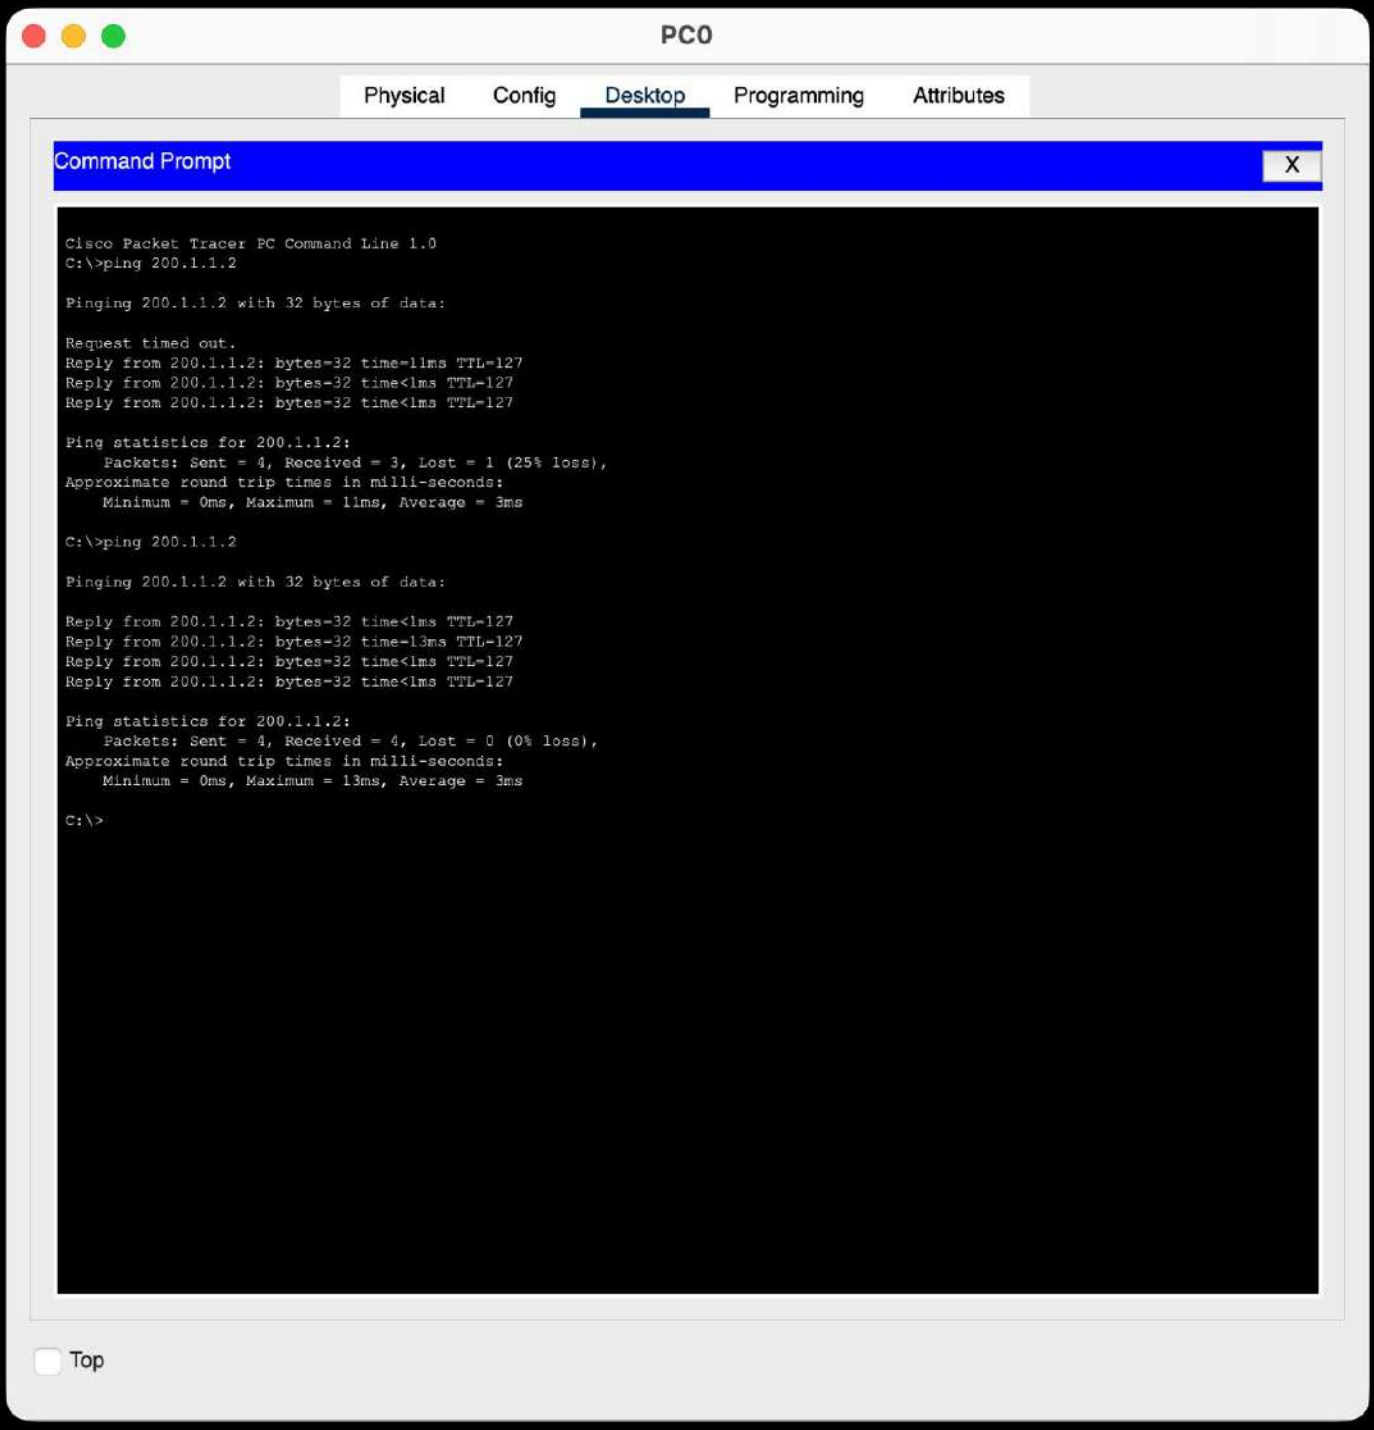

Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
exit
Router(config)#interface gigabitEthernet0/1
Router(config-if)#ip address 200.1.1.1 255.255.255.0
Router(config-if)#ip nat outside
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
exit
Router(config)#ip nat inside source static 192.168.1.2 200.1.1.100
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#
?Bad filename
%Error parsing filename (Bad file number)
Router#enable
Router#show ip nat translations
Pro Inside global Inside local Outside local Outside global
--- 200.1.1.100 192.168.1.2 --- ---
Router#show ip nat statistics
Total translations: 1 (1 static, 0 dynamic, 0 extended)
Outside Interfaces: GigabitEthernet0/1
Inside Interfaces: GigabitEthernet0/0
Hits: 7 Misses: 8
Expired translations: 8
Dynamic mappings:
Router#show ip nat translations
Pro Inside global Inside local Outside local Outside global
--- 200.1.1.100 192.168.1.2 --- ---
Router#show ip nat statistics
Total translations: 1 (1 static, 0 dynamic, 0 extended)
Outside Interfaces: GigabitEthernet0/1
Inside Interfaces: GigabitEthernet0/0
Hits: 7 Misses: 8
Expired translations: 8
Dynamic mappings:
Router#
Copy
Paste
Top


Cisco Packet Tracer - /Users/happy/Cisco Packet Tracer 9.0.1/saves/Experiment_11_NAT.pkt
Logical
Physical
x: 572, y: 368
Root
05:56:00
PC-PT
PC0
2960-24TT
Switch0
1841
Router0
Server-PT
Server0
Time: 00:11:48
Realtime
Simulation
Search for device
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete


PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 200.1.1.2
Pinging 200.1.1.2 with 32 bytes of data:
Request timed out.
Reply from 200.1.1.2: bytes=32 time=11ms TTL=127
Reply from 200.1.1.2: bytes=32 time<1ms TTL=127
Reply from 200.1.1.2: bytes=32 time<1ms TTL=127
Ping statistics for 200.1.1.2:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 11ms, Average = 3ms
C:\>ping 200.1.1.2
Pinging 200.1.1.2 with 32 bytes of data:
Reply from 200.1.1.2: bytes=32 time<1ms TTL=127
Reply from 200.1.1.2: bytes=32 time=13ms TTL=127
Reply from 200.1.1.2: bytes=32 time<1ms TTL=127
Reply from 200.1.1.2: bytes=32 time<1ms TTL=127
Ping statistics for 200.1.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 13ms, Average = 3ms
C:\>
Top