Berg Trailers

GRAIN TRAILERS

STEEL SERIES



STEEL TRIDEM



STEEL TANDEM

ALUMINUM SERIES



SILVER TRIDEM



ALUMINUM SUPER B

bergtrailers.net

Berg Trailers

ABOUT BERG TRAILERS

BUILT FOR THE ROAD. BUILT TO LAST.

Based in Winkler, Manitoba, **Berg Trailers** specializes in commercial trailers designed for demanding transportation and agricultural applications.

From steel and aluminum grain trailers to specialized hauling equipment, our focus is on practical design, durability and dependable performance.



DURABLE CONSTRUCTION

PRACTICAL DESIGN

DEPENDABLE PERFORMANCE

WINKLER, MANITOBA · CANADA

EXPLORE OUR CATALOG

Discover our trailer range, components and technical references.

01 TRAILERS
Steel, Aluminum, Super B & TAG



02 AXLES & SUSPENSION
Axles, Hubs, Brakes & Suspension



03 LANDING GEAR
Diamond Steel & Aluminum



04 TIRES & WHEELS
Longmarch Commercial Tires



05 TARP SYSTEMS
Michel's Select & Maximizer



06 ELECTRICAL SYSTEMS
Sealco & Grote Wiring



07 PARTS & COMPONENTS
Parts catalogs & technical references



08 ROLLER CHUTE
Controlled Bottom Discharge



// bergtrailers.net

BERG AXLE

AIR SUSPENSION SYSTEM

HEAVY DUTY TRAILER SOLUTIONS



SPECIFICATIONS

- Designed to fit your trailer
- Industry-standard geometry and components
- Engineering support for custom configurations
- Designed for standard 5-inch round axle tube
- Disc and drum brake compatible
- 6.5 - 19 inch ride height options
- 25,000 lb capacities
- Designed for multi-axle trailers
- Lift kit option available

TECHNICAL REFERENCE

SPECIFICATIONS | PARTS & ASSEMBLY DETAILS



TECHNICAL SPECIFICATIONS

Axle Manufacturer / Model	2028
Axle Capacity	25,000 lbs
Suspension Configuration	Multiable
Brake System	Air

Berg Trailers

DIAMOND LANDING GEAR

STEEL VERSION

DURABLE SUPPORT FOR YOUR TRAILER



RUGGED & RELIABLE
Heavy-duty construction for long-lasting performance in demanding conditions.

DURABLE FINISH
Heavy-duty coating for extended service life.

75,000 LBS CAPACITY
Provides strong and stable support for loaded trailers.


EASY MAINTENANCE
Simple, serviceable design for reduced downtime.



GEAR HOUSING
Robust, sealed gearbox for reliable operation.



MOUNTING PLATE
Multiple mounting holes for versatile installation.

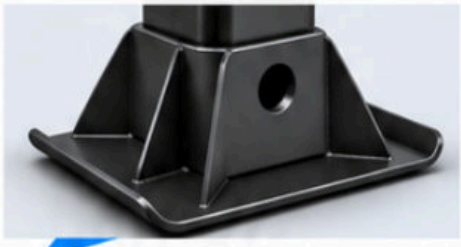


FOOT PLATE
Wide, reinforced base for maximum stability and surface area.

PRODUCT SPECIFICATIONS

Product	Diamond Landing Gear – Steel Version
Application	Trailers (Dump, Hopper, Flatdeck, etc.)
Type	Constant mesh gear – 2 speed
Construction	Heavy-Duty Steel
Finish	Heavy-Duty Coating (Black)
Features	Manual Crank Operation Reinforced Bracing Heavy-Duty Mounting Brackets 75,000 lbs Capacity Long Service Life

DIAMOND LANDING GEAR

STEEL VERSION | PARTS CATALOG

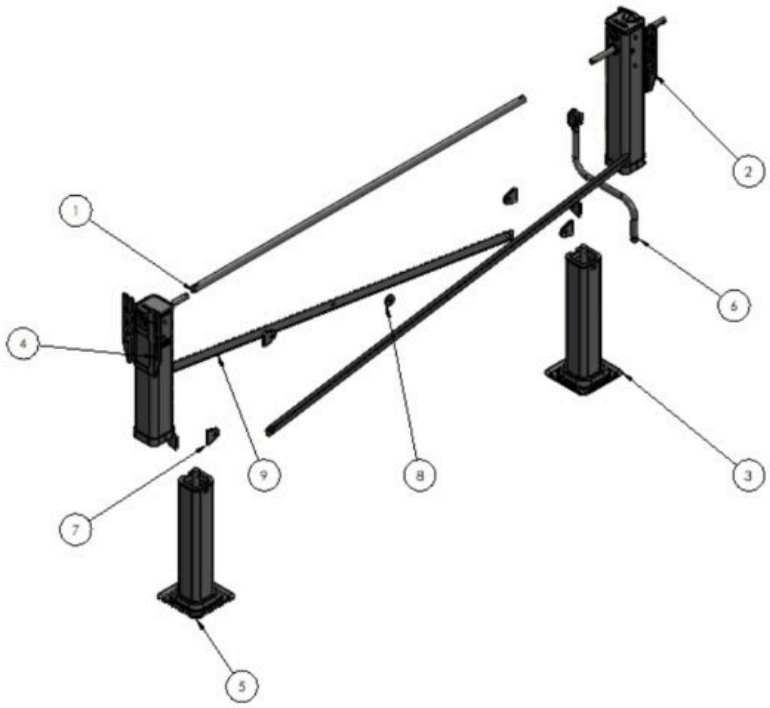


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	GT-072	Landing Gear Tube	1
2	A401L-17-UPPER_DEV08_1-1	LANDING GEAR PART	1
3	G3-17-LOWER_2-1	LANDING GEAR PART	1
4	A401L-17-UPPER_DEV08_1-1	BRACKET, LANDING GEAR	1
5	G3-17-LOWER_3-1	BOTTOM PART, LANDING GEAR	1
6	Crank	CRANK, LANDING GEAR	1
7	GT2368-078	LANDING GEAR STRUT SUPPORT	6
8	GT2308-171	SPACER, GT LANDING GEAR	1
9	GT2308-170	CROSS BRACE LANDING GEAR	2

ELIte™ ELECTRONIC LOCK INDICATOR

Holland® SAF-HOLLAND Group

Easily Retrofitted to the Popular HOLLAND FW35 Fifth Wheel

Retrofit Kits available through the SAF-HOLLAND Original Parts Distributor Network.

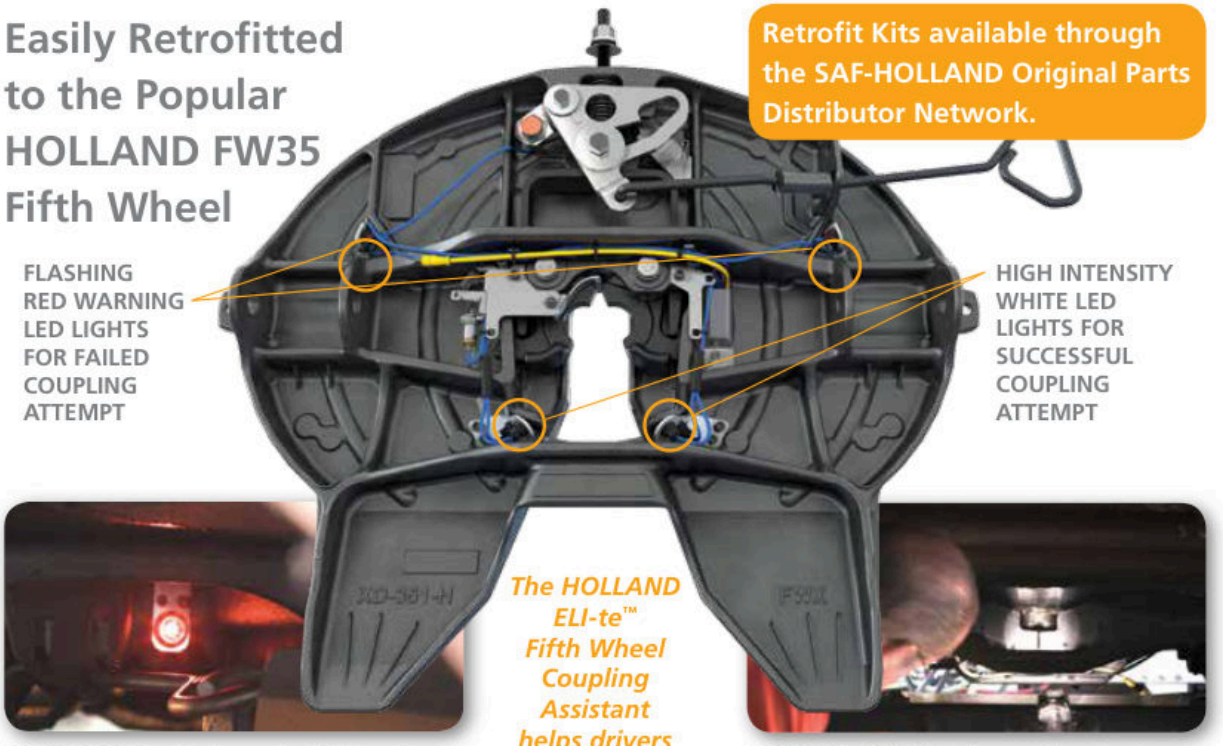

FAILED COUPLING – In the case of a failed coupling attempt, bright red flashing LED lights assist the driver to quickly recognize a potentially costly mistake.

The HOLLAND ELI-te™ Fifth Wheel Coupling Assistant helps drivers GET IT RIGHT!

SUCCESSFUL COUPLING – A successful couple triggers high-intensity white LED lights, strategically aimed at the kingpin and lock for enhanced visibility during the inspection process, especially in poor weather and low-light conditions.

PART NUMBER	DESCRIPTION
RK-12131	Full Retrofit Kit For Pre-Drilled Top Plate*
RK-12015	Tractor Power Cable Kit (Class 8 Truck Applications Only)
RK-12117	Dolly Power Cable Kit (Dolly Applications Only)
RK-12119	Slider Coiled Power Cable Kit – 12˝ To 48˝ Length (Slider Applications Only)
* NOTE: When ordering a full retrofit kit for a non-drilled top plate, be sure to order Drilling Tool Kit RK-12116, and the appropriate power cable for your application.	
RK-12116	Drilling Tool Kit for Retrofit – Drill Template, Lock Pin Jig, Drill Bits, Taps, Instructions
XA-351-A-1L-L-P	FW35 Top PLate Equipped with ELI-te™
XA-331-A-1L-L-P	FW33 Top Plate Equipped with ELI-te™
XA-311-A-1L-L-P	FW31 Top Plate Equipped with ELI-te™

NOTE: Contact your sales representative for additional top plates equipped with ELI-te™

XL-FW20126AL-en-US Rev B - 2017-07-25 - Amendments and errors reserved ©SAF-HOLLAND, Inc. SAF-HOLLAND, HOLLAND, GOLD LINEQuality Parts and SAF-HOLLAND Original Parts logos are trademarks of SAF-HOLLAND S.A., SAF-HOLLAND GmbH, and SAF-HOLLAND, Inc.

safholland.com

SAF-HOLLAND, Inc.
800.876.3929 Fax 800.356.3929

SAF-HOLLAND Canada Limited
519.537.3494 Fax 800.565.7753
Western Canada 604.574.7491 Fax 604.574.0244

SAF-Holland ORIGINAL PARTS™

BERG DESIGNED TANK

AIR TANK | BERG TRAILERS COMPONENTS



AIR TANK ASSEMBLY

Berg-designed air tank assembly

3D model showing the tank, mounting brackets and attached components.

PRODUCT REFERENCE

Air tank assembly | Technical illustration

Berg Trailers

COMMERCIAL TIRE PRODUCT FLYER

LONGMARCH®

COMMERCIAL TIRES

BUILT FOR THE LONG HAUL



Durable & Reliable
Built for heavy-duty commercial use with long service life.

Excellent Traction
Optimized tread design for stability and safety in all conditions.

Fuel Efficiency
Low rolling resistance for better fuel economy.

Retreadable Casing
High-quality construction for multiple retreads.

TIRE PATTERNS



LM216

All-Position / Regional



LM211

All-Position / On-Off Road

TIRE SPECIFICATIONS

PATTERN	SIZE	PR	LOAD INDEX	SPEED RATING	APPLICATION
LM216	11R22.5/24.5	16	146/143	M (130 km/h)	All-Position / Regional
LM211	11R22.5/24.5	16	148/145	M (130 km/h)	All-Position / Mixed

Berg Trailers

Michel's®

SIDE - ROLL GRAIN TARP SYSTEMS

SELECT & MAXIMIZER

FOR ALL TYPES OF GRAIN BODIES





SELECT

The "Original" Side-Rolling Tarpaulin System with a precise fit.

OR

MAXIMIZER

incorporates added width to the fabric to accommodate heaped loads.



"The Truck Tarp Specialist"



Proven Tension Control – Extension springs along with beveled pulleys on both ends of the roll-tube apply constant and uniform tension.



The removable rear end cap/hood, on farm models, is designed to enable full function of the tailgate.



Ridgepole sewn into tarp fabric is standard on farm models (no straps or ridgepole in the way for loading) optional on semi-trailers.



Semi units can have, front or rear cranks that are short or long depending on trailer requirements.



Optional, Flip release tarp stops are available in 3" or 6" offset.

OPTIONS:

- 20 oz. tarp fabric in 16 colors
- 22 oz. tarp fabric in 4 colors
- Standard or reverse roll (standard roll locks closed on the drivers side)
- Reinforced over cross-members
- Fiberglass ridgepole in tarp fabric for added support - Semi's only
- Flip release tarp stops



ELECTRIC OPTIONS

A sealed electric motor, with a cover to shield it from the elements, is attached to an aluminum pivot arm used to rotate the roll-tube to open and close the tarp assembly.



This motor can be operated by a rocker switch (from your cab) or an optional 200 Series Integrated Wireless Remote. Available for all SELECT or MAXIMIZER side-roll tarp systems.

"ONE REMOTE=ENDLESS POSSIBILITIES"

Manufactured By:
MICHEL'S Industries, Ltd.
#3 Entrance Road
P.O. Box 119
St. Gregor, SK. S0K 2A0
PH: (306) 366-2184 FX: (306) 366-2145
Email: sales@michels.ca

Distributed By:

Printed in Canada

Berg Trailers


GROTE



WIRING HARNESS & ELECTRICAL COMPONENTS


Trailer electrical systems for Grain, Hopper & Super B Trailers

7-CONDUCTOR CABLE (SAE J1067™ AND J560™)

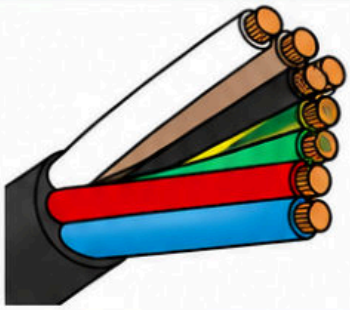


White	Ground (10 ga.)
Brown	Tail and license lamp, and clearance lamps (12 ga.)
Black	Clearance, sidemarker, and identification lamps (12 ga.)
Yellow	Left turn signal lamp (12 ga.)
Green	Right turn signal lamp (12 ga.)
Red	Stop lamps (12 ga.)
Blue	Auxiliary circuit (12 ga.)

ULTRA-SEAL G7





87212






87214

PART NUMBER	DESCRIPTION
87214	Straight Plug & Receptacle With 7-Way Female **Length:** 24"/610 mm | **Gauge:** 1/10, 6/12
87215	Straight Plug & Receptacle With 7-Way Male **Length:** 24"/610 mm | **Gauge:** 1/8, 2/10, 4/12
87210	90° Plug & Receptacle With 7-Way Female And Drops For Marker Lamps (Grounded And Black) **Length:** 24"/610 mm | **Gauge:** 1/10, 6/12
87211	90° Plug & Receptacle With 7 Standard Females And Drops For Marker Lamps (Grounded And Black) **Length:** 24"/610 mm | **Gauge:** 1/10, 6/12
87212	90° Plug & Receptacle Blunt Cut With Drops For Marker Lamps (Grounded And Black) **Length:** 24"/610 mm | **Gauge:** 1/10, 6/12

VMRS Code: 034-002-036

ULTRA-BLUE-SEAL® MAIN HARNESS

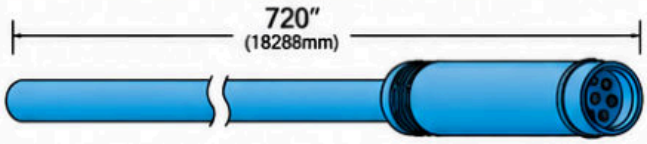


Extends from front of nose box or receptacle and provides sealed plug-in connection to real sill harness.

1–8 GAUGE, 2–10 GAUGE, 4–12 GAUGE:

66071 60' Long

VMRS Code: 034-004-023

ULTRA-BLUE-SEAL® MAIN HARNESS ABS ADAPTER

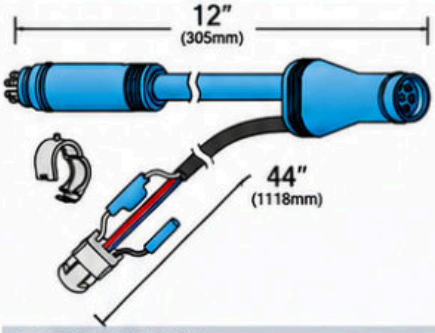

- Junction between main harness and real sill harness
- Provides sealed plug-in connection and a drop-out extension for ABS
- Ground return
- ABS fault lamp connection


ABS FAULT LIGHT:

66705 12' Long

VMRS Code: 034-004-023

ROLLER CHUTE

CONTROLLED BOTTOM DISCHARGE SYSTEM

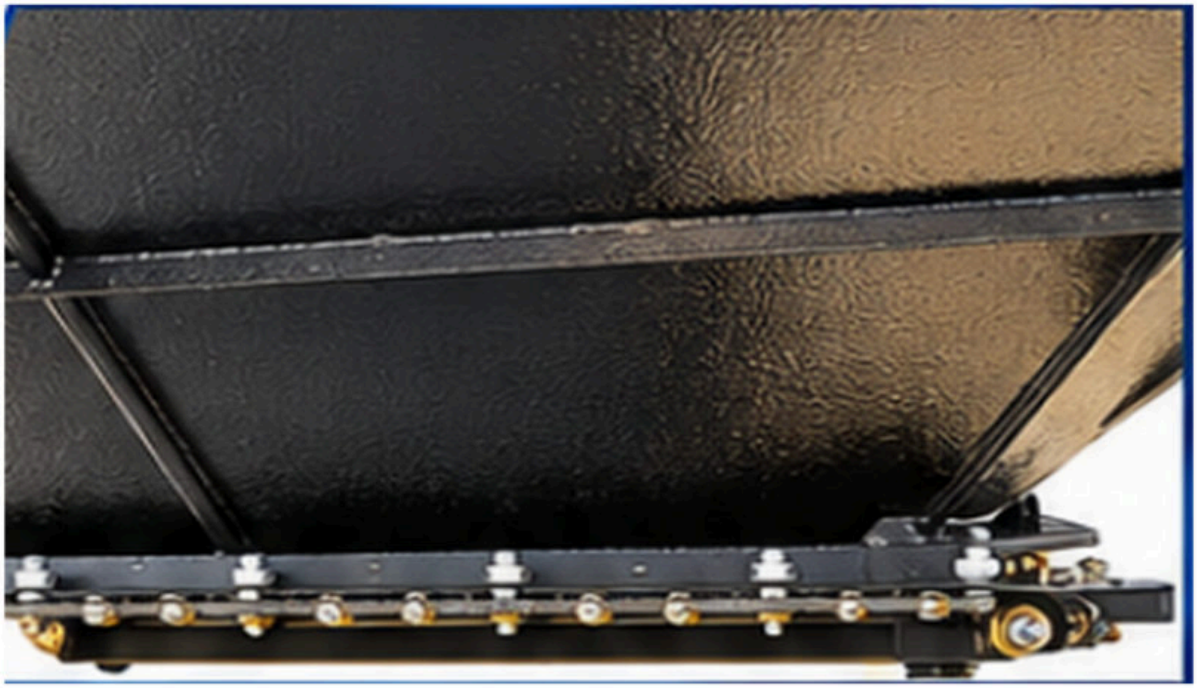

SPECIFICATIONS

- All-steel hopper with reinforced construction
- Roller chute with chain drive and multiple rollers
- Adjustable flow control gate (manual lever)
- Designed for grain, seed, fertilizer and other bulk materials
- Remote control option

Berg Trailers

TAG TRAILERS



// bergtrailers.net

SCAN OUR WEBSITE