

A First-Principles Dynamic Model of a Rubber V-Belt CVT for General Transient Simulation

With Mechanical Actuation and Traction-Limited Torque Transfer

Kai Arseneau

June 21, 2026

Abstract

This work develops a first-principles dynamic model for a mechanically actuated dry rubber V-belt continuously variable transmission (CVT) and its coupling to the vehicle drivetrain. The model is motivated by a persistent gap in the available literature: while quasi-static Baja-oriented models are common and detailed dynamic models exist for hydraulically actuated metal-belt CVTs, publicly available formulations for mechanically actuated rubber belt CVTs do not generally combine sheave inertia, flyweight actuation, torque-reactive secondary clamping, belt geometric closure, traction-limited torque transmission, and vehicle longitudinal dynamics within a single unified framework.

Starting from pulley geometry and belt-length closure, the derivation develops the CVT kinematics, the rotational dynamics of the primary and secondary pulleys, the axial equation of motion governing shift, and the torque-transfer closure required to distinguish sticking from traction-limited slip. The primary clutch model includes centrifugal flyweight actuation and spring preload, while the secondary model includes helix-generated torque feedback together with spring forces. A centrifugal belt correction is also derived to account for the reduction in effective normal force at speed. These elements are assembled into a closed nonlinear state-space model suitable for direct numerical time integration.

The resulting formulation is intended both as a simulation model and as a derivation document in which each major modeling step remains physically interpretable. Simulation results are used to examine whether the completed model behaves in mechanically sensible ways under transient launch conditions. Comparisons of launch shift trajectories, pulley axial-force balance, and torque admissibility across multiple tuning cases show a consistent mechanism chain from tuning changes, to clamping-force evolution, to stick-slip behavior, to overall launch outcome. The default tuning produces the most balanced launch response, combining strong early admissible coupling torque, controlled low-ratio retention, and a smoother main shift. More aggressive cases reveal renewed slip and visibly underdamped oscillatory transients during shift onset, highlighting both the usefulness of the model and the limitations introduced by idealized loss assumptions.

Overall, the formulation provides a physically transparent dynamic foundation for understanding mechanically actuated CVT behavior during launch events. Its main value is not only that it closes the governing mechanisms into one consistent dynamical system, but also that the resulting behavior remains traceable back to clear mechanical causes.

Contents

Abstract	i
Contents	iv
Nomenclature and Notation	v
1 Introduction & Background	1
1.1 Problem and Motivation	1
1.2 Conceptual Overview of a Continuously Variable Transmission	2
1.2.1 Why Use a Continuously Variable Transmission?	2
1.2.2 Physical Layout and Single-Pulley Geometry	3
1.2.3 Two-Pulley Coupling and Ratio Change	5
1.2.4 Torque Transfer, Clamping Force, and Slip	6
1.2.5 Mechanical Actuation in the Present CVT	7
1.2.6 Full Drivetrain Architecture	9
1.3 Motivation and Literature Review	11
1.3.1 Framework for Classifying CVT Models	11
1.3.2 Practical Design and Tuning Foundations	12
1.3.3 Design-Oriented and Quasi-Static CVT Models	13
1.3.4 Mechanical Actuation and Clamping Force Generation	14
1.3.5 Rubber V-Belt Contact, Slip, and Efficiency Models	14
1.3.6 Transient Rubber-Belt Models and the Launch Problem	15
1.3.7 Adjacent Metal-Belt and Chain CVT Dynamic Models	16
1.3.8 Synthesis of Prior Work	17
1.4 Aim, Scope, and Contributions	19
1.4.1 Aim	19
1.4.2 Scope	19
1.4.3 Contributions	20
2 Model Setup	21
2.1 System Definition	21
2.2 Modeling Assumptions	21
2.2.1 Material and Structural Idealizations	21
2.2.2 Contact and Friction Modeling	22
2.2.3 Geometric and Kinematic Idealizations	23
2.2.4 Dynamic and Inertial Modeling	23
2.2.5 Environmental and Operational Scope	24

2.3	Reference Material	24
2.3.1	Coordinate and Sign Conventions	24
2.4	Governing Principles	29
2.4.1	Model Quantity Roles and Evaluation Flow	35
2.5	System State Definition	36
2.5.1	State Vector	37
2.5.2	Independent Dynamic Degrees of Freedom	37
2.5.3	Time Integration Perspective	37
3	Derivation	39
3.1	Pulley Geometry	39
3.1.1	Shift Coordinate, Deadzone, and Primary Closure	39
3.1.2	Primary Outer Radius as a Function of Shift	40
3.1.3	Fixed Belt Length and Pulley Coupling	42
3.1.4	Secondary Radius from Belt-Length Compatibility	45
3.1.5	Wrap Angles as Functions of Shift	46
3.1.6	Effective Torque Radius	46
3.1.7	CVT Ratio Definition	47
3.1.8	Ratio Rate of Change	48
3.1.9	Section Summary and Forward Connection	54
3.2	Pulley Axial Force Models	56
3.2.1	Ramp Geometry Parameterization	57
3.2.2	Primary Axial Force Model	60
3.2.3	Secondary Axial Force Model	63
3.2.4	Belt Centrifugal Force on the Wrap	68
3.2.5	Axial Shift Dynamics	73
3.2.6	Section Summary and Forward Outlook	76
3.3	Rotational and Belt Transport Dynamics	77
3.3.1	System Definition and Torque Path	78
3.3.2	Engine Torque Model	79
3.3.3	Load Torque Model	79
3.3.4	Inertia Definitions	81
3.3.5	Common Equations of Motion	82
3.3.6	Common Dynamic Relations and Remaining Closure	83
3.4	Gross Stick Compatibility and No-Slip Candidate	84
3.4.1	Gross Stick Compatibility	84
3.4.2	No-Slip Candidate Solve	85
3.4.3	Transition to Traction Limits	89
3.5	Traction Limits and Slip Conditions	90
3.5.1	Contact-Torque Capacity	90
3.5.2	Normal Force from Axial Clamping	92
3.5.3	Primary Pulley No-Slip Admissibility	93
3.5.4	Secondary Pulley No-Slip Admissibility	93
3.5.5	Admissibility of the No-Slip Candidate	94
3.5.6	Kinetic Traction Bound for Slipping Contacts	95
3.5.7	Section Conclusion and Transition	95
3.6	Slip Branch Dynamics and Contact-State Selection	95
3.6.1	Relative Contact Speeds and Slip-State Logic	96

3.6.2	Kinetic Traction Law for a Slipping Contact	97
3.6.3	Primary-Slip Branch	98
3.6.4	Secondary-Slip Branch	99
3.6.5	Two-Contact Slip Branch	101
3.6.6	Contact-State Selection	102
3.6.7	Section Summary	103
3.7	Complete CVT Dynamic Model	103
3.7.1	State Definition	103
3.7.2	Geometry and Contact Kinematics	104
3.7.3	Torque-Transfer Closure	104
3.7.4	Governing ODEs	105
3.7.5	Model Evaluation Sequence	105
3.7.6	Complete Nonlinear ODE System	106
4	Results and Discussion	107
4.1	Simulation Results	107
4.1.1	Simulation Cases and Phase Convention	107
4.1.2	Launch Shift Curves	108
4.1.3	Axial Force Balance Through the Launch	110
4.1.4	Torque Bounds, No-Slip Demand, and Coupling Torque	113
4.1.5	Launch Performance Comparison	115
4.2	Implementation and Reproducibility	116
4.3	Conclusion	116
	Bibliography	118
A	Belt Length Small-Angle Approximation	121
A.1	Standard Approximation	121
A.2	Derivation of the Approximate Center Distance	121
A.3	Error Analysis	122
A.4	Propagation to Secondary Radius and Transmission Ratio	123
A.4.1	Derivation of the Approximate Secondary Radius	123
A.4.2	Zero Shift Configuration	124
A.4.3	Maximum Shift Configuration	124
A.5	Summary of Approximation Errors	126
B	Common Ramp Profile Designs	127
B.1	Linear Ramp	127
B.2	Circular Arc Ramp	127
B.3	Hyperbolic Ramp (Perfect Cancellation)	129
B.4	Piecewise Ramps and Smoothing	131
C	Numerical Methods Summary	132
C.1	Root Finding for Belt-Length Constraint	132
C.2	ODE Integration for Dynamic Simulation	133
C.3	Slip-Law Regularization and Blend Parameter Selection	134

Nomenclature and Notation

All quantities are expressed in SI units unless otherwise stated. Angles are expressed in radians. Angular velocities are expressed in rad/s. Torques are expressed in N m, forces in N, lengths in m, and masses in kg.

Symbol Summary

Symbols used throughout the derivation are summarized in [Table 1](#).

Symbol	Meaning
State and kinematics	
$\mathbf{x}(t)$	state vector
t	time
ω_p, ω_s	primary and secondary angular speed
$s, \dot{s}, \ddot{s}$	shift position, velocity, and acceleration
$R, \dot{R}$	CVT ratio and ratio rate
v_b	belt transport speed
v_b^*, T_b	slip-branch target belt speed and belt-speed relaxation time constant
v_Δ	slip metric: primary-imposed minus secondary-imposed belt-line speed
Geometry	
$r_{p,\text{outer}}(s), r_{s,\text{outer}}(s)$	primary and secondary outer radius
$r_{p,\text{eff}}(s), r_{s,\text{eff}}(s)$	primary and secondary effective torque radius
$r_{p,\text{outer},\text{min}}$	minimum primary outer radius
$r_{s,\text{outer},\text{max}}$	maximum secondary outer radius
$s_{\text{dz}}, s_{\text{max}}$	deadzone threshold and maximum shift
β	sheave face half-angle (radial reference)
C	pulley center distance
L_b	total belt length
ϕ	belt wrap angle used in distributed contact model
$r, \dot{r}$	local belt path radius and its time derivative
r_{cm}	belt element center-of-mass radius
Constraint and mapping functions	
$f(r_p, r_s, C)$	belt-length compatibility root function ($f = 0$)
$\text{root}_{r_s}(\cdot)$	numerical root solve for secondary radius
$r_f(s), \frac{dr_f}{ds}$	primary flyweight radius map and gradient
$\theta_s(s), \frac{d\theta_s}{ds}$	secondary helix angle map and gradient

Symbol	Meaning
Forces and torques	
$F_{p,ax}, F_{s,ax}$	primary and secondary axial mechanism force
$F_{c,p}, F_{c,s}$	primary and secondary belt centrifugal axial contribution
F_{ax}	generic axial clamp force at one pulley contact
τ_{eng}, τ_{load}	engine input torque and reflected load torque
τ_p, τ_s	coupling torque seen at primary and secondary
τ, τ_c	generic interface torque and applied coupling/friction torque
τ_{ns}	no-slip requested coupling torque
$\tau_{-}^{stick}, \tau_{+}^{stick}$	aggregate lower and upper coupling-torque bounds for stick admissibility
$\tau_{-}^{slip}, \tau_{+}^{slip}$	aggregate lower and upper coupling-torque bounds on slip branches
$\tau_{c,p,\pm}^{stick}, \tau_{c,s,\pm}^{stick}$	primary/secondary pulley-wise stick-branch lower/upper bounds
$\tau_{c,p,\pm}^{slip}, \tau_{c,s,\pm}^{slip}$	primary/secondary pulley-wise slip-branch lower/upper bounds
Mass/inertia and material parameters	
I_p, I_s	primary and secondary rotational inertia
m_f	effective flyweight mass
$m_{p,m}, m_{s,m}$	equivalent primary and secondary translating mechanism mass
ρ_b	belt material density
A_b	belt cross-sectional area
μ	belt-pulley traction coefficient
$k_p, x_{p,0}$	primary spring stiffness and preload displacement
$k_{s,\theta}, \theta_{s,0}$	secondary torsional stiffness and preload angle
$k_{s,x}, x_{s,0}$	secondary axial stiffness and preload displacement

Table 1: Core symbols used throughout the derivation.

Constants and Parameters

All parameters in [Table 2](#) are treated as constant values that do not vary through the model. They are either physical constants, fixed by the physical design of the CVT and vehicle or else are tuning parameters that are set and held constant during a given simulation run.

Symbol	Name	Unit	Description
Geometry and belt			
L_b	Belt length	m	Fixed total belt length
β	Sheave half-angle	rad	Cone half-angle used for radial/axial conversion
h_b	Belt thickness	m	Radial belt thickness
b_{out}	Belt outer width	m	Belt width at outer face
b_{in}	Belt inner width	m	Belt width at inner face
$r_{p,outer,min}$	Primary minimum outer radius	m	Radius at fully open primary
$r_{s,outer,max}$	Secondary maximum outer radius	m	Radius at fully closed secondary
s_{dz}	Shift deadzone threshold	m	Onset of effective radial motion

Symbol	Name	Unit	Description
$s_{\max}$	Maximum shift	m	Physical upper travel bound
Primary/secondary actuation			
m_f	Flyweight mass	kg	Effective flyweight mass
$r_{f,0}$	Initial flyweight radius	m	Flyweight radius offset at $s = 0$
k_p	Primary spring stiffness	N/m	Primary compression spring rate
$x_{p,0}$	Primary spring preload	m	Initial compression of primary spring
$k_{s,\theta}$	Secondary torsional stiffness	N m/rad	Torsional spring rate in helix assembly
$\theta_{s,0}$	Secondary torsional preload	rad	Initial torsional deflection preload
r_h	Helix reference radius	m	Effective cylindrical radius in helix kinematics
$k_{s,x}$	Secondary axial stiffness	N/m	Secondary axial compression spring rate
$x_{s,0}$	Secondary axial preload	m	Initial compression of secondary axial spring
Inertia and drivetrain			
I_{eng}	Engine inertia	kg m ²	Engine rotational inertia
I_{prim}	Primary pulley inertia	kg m ²	Primary CVT pulley inertia
I_p	Effective primary inertia	kg m ²	Implemented primary-side inertia in current setup
I_{sec}	Secondary pulley inertia	kg m ²	Secondary CVT pulley inertia
I_{gb}	Gearbox inertia	kg m ²	Gearbox/intermediate shaft inertia
I_{wheel}	Wheel inertia	kg m ²	Wheel/hub inertia about wheel axis
I_s	Effective secondary inertia	kg m ²	Lumped secondary-side inertia about secondary axis
G	Final drive ratio	1	Fixed ratio defined by $\omega_s = G \omega_w$
m	Vehicle mass	kg	Total vehicle mass
r_w	Wheel rolling radius	m	Effective tire rolling radius
Contact and environment			
ρ_b	Belt density	kg/m ³	Belt material density
μ_s	Belt-pulley static friction coefficient	1	Static traction coefficient used at impending slip
μ_k	Belt-pulley kinetic friction coefficient	1	Kinetic traction coefficient used on slip branches
C_{rr}	Rolling resistance coefficient	1	Tire-road rolling resistance coefficient
C_d	Drag coefficient	1	Aerodynamic drag coefficient
A_f	Frontal area	m ²	Vehicle aerodynamic reference area
ρ	Air density	kg/m ³	Ambient air density used in drag model
g	Gravitational acceleration	m/s ²	Gravity constant

Table 2: Canonical non-varying parameters used by the CVT model equations.

Chapter 1

Introduction & Background

The continuously variable transmission (CVT) is a mechanical power transmission device capable of producing a continuously variable speed ratio between an input and output shaft, in contrast to the fixed discrete ratios of a conventional stepped gearbox. In the class of CVTs relevant to this work — dry rubber V-belt CVTs with mechanically actuated conical sheave pairs — the transmission ratio is not commanded by an external actuator or electronic controller. Instead, it is an emergent dynamic response: the equilibrium of axial forces acting on the primary and secondary sheave pairs, arising from centrifugal flyweight mechanisms, torque-reactive helix and ramp assemblies, and return springs, determines the radial position at which the belt seats within each sheave groove, and therefore the effective pitch radii and transmission ratio at every instant.

This self-regulating character is simultaneously the CVT's greatest practical asset and the primary source of difficulty in modeling it rigorously. Because no actuator explicitly commands the ratio, the ratio trajectory must emerge through the evolution of an internal shift degree of freedom whose motion is set by the coupled force balance of the pulleys and belt. In practice, this means that engine speed, transmitted torque, shift position, and traction state evolve together in time, with each affecting the others through the underlying mechanics.

This class of CVT is found throughout small-displacement powersport and utility vehicles. It is the mandated transmission in the SAE Baja competition series, where a 10 hp engine is paired with a CVT that must be designed, selected, and tuned entirely by student engineering teams from first principles. Beyond Baja, mechanically actuated rubber V-belt CVTs are standard equipment in snowmobiles, all-terrain vehicles (ATVs), utility task vehicles (UTVs), and small agricultural and industrial machinery. Despite their prevalence and the practical engineering importance of understanding their behavior, the quality of publicly available engineering models for these systems is strikingly uneven. The present work was motivated directly by this gap.

1.1 Problem and Motivation

Yahoo

1.2 Conceptual Overview of a Continuously Variable Transmission

This section introduces the operating principles of the continuously variable transmission (CVT) considered in this work. The goal is not yet to derive the model equations, but to build the mechanical intuition needed to understand them. In particular, this section explains why a CVT is useful, how a rubber V-belt CVT changes ratio, why clamping and traction matter, how the primary and secondary pulleys generate their forces, and why the CVT must be understood as part of a larger drivetrain system.

1.2.1 Why Use a Continuously Variable Transmission?

A transmission is responsible for matching the operating speed of an engine to the speed required at the vehicle wheels. In a conventional stepped gearbox, this is achieved using a fixed set of discrete gear ratios. Each gear imposes a fixed relationship between engine speed and wheel speed. As the vehicle accelerates, the engine speed rises through one gear, drops when the transmission shifts, and then rises again in the next gear. This repeated sweep through the engine speed range is a direct consequence of having only a small number of available ratios.

This matters because an internal combustion engine (ICE) does not produce the same torque and power at every speed. Instead, the engine has a useful operating region where it can produce power more effectively, as shown conceptually in the left panel of [Figure 1.1](#). A stepped gearbox can pass through this region, but it cannot generally stay there while vehicle speed continues to increase. The right panel of [Figure 1.1](#) contrasts this stepped behavior with the smoother operating path made possible by a continuously variable transmission.

A continuously variable transmission (CVT) addresses this limitation by allowing the transmission ratio to vary smoothly within a finite range rather than changing through a fixed set of gear steps. Since the ratio can change continuously, the engine can remain closer to a desired operating region while the vehicle accelerates. This is the main benefit of a CVT: it gives the drivetrain more freedom to match engine behavior to vehicle load.

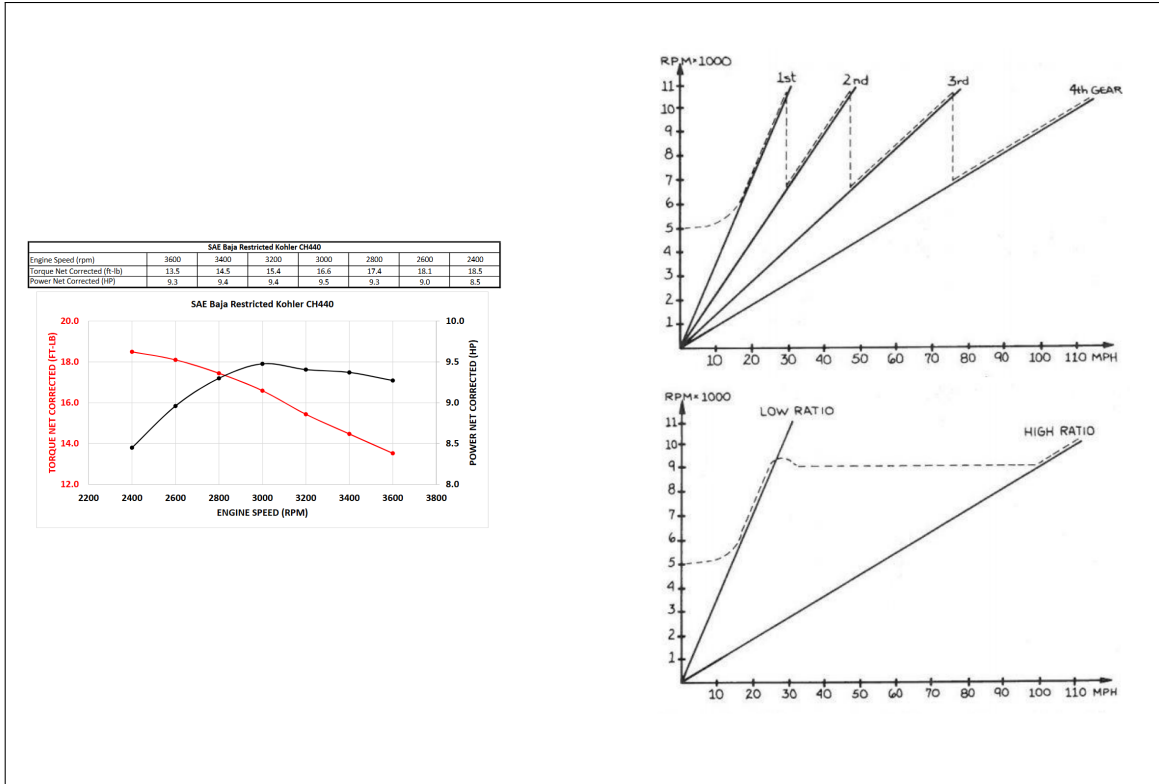


Figure 1.1: Conceptual motivation for a CVT. Internal combustion engines produce torque and power that vary with speed. A stepped gearbox forces the engine to move repeatedly through its speed range, while a continuously variable ratio can keep the engine closer to a useful operating region as vehicle speed changes.

1.2.2 Physical Layout and Single-Pulley Geometry

There are several forms of continuously variable transmission, including different mechanical layouts and different ways of producing the variable speed relationship. This work focuses on a belt-sheave CVT, shown conceptually in [Figure 1.2](#). In this arrangement, two variable-radius pulleys are connected by a rubber V-belt. The pulley connected to the engine side is called the primary (or driving) pulley. The pulley connected to the downstream drivetrain is called the secondary (or driven) pulley. The belt transmits motion and torque between these two pulleys.

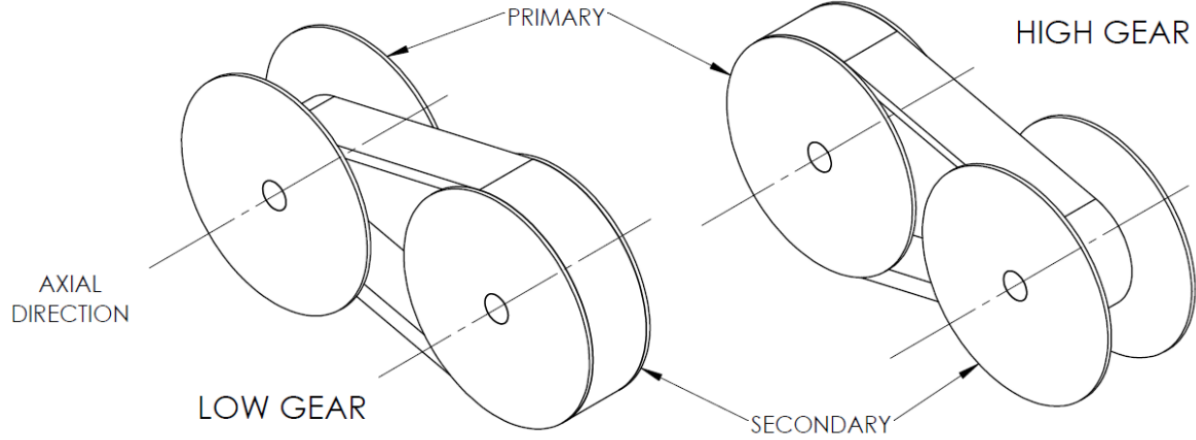


Figure 1.2: Overall layout of the belt-sheave CVT considered in this work. The primary pulley is connected to the engine side, the secondary pulley is connected to the downstream drivetrain, and the rubber V-belt transmits motion and torque between them.

Before considering the full two-pulley system, it is helpful to look at the geometry of a single pulley. Both the primary and secondary pulleys share the same basic anatomy. Each pulley is made from two opposing conical sheaves that form a V-shaped groove. One sheave is fixed axially to the shaft, while the other can move along the shaft. The rubber V-belt sits between the sheave faces. This basic layout is shown in [Figure 1.3](#).

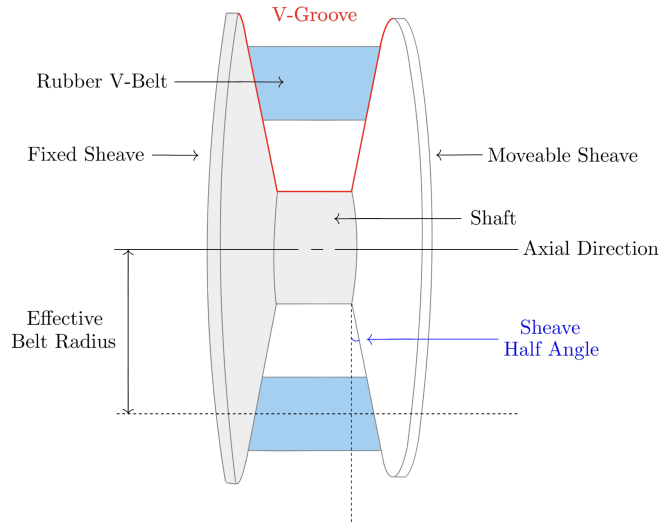


Figure 1.3: Generic anatomy of a belt-sheave CVT pulley. Each pulley consists of opposing conical sheaves that form a V-groove. Motion of the movable sheave changes the groove width and therefore changes the radius at which the belt rides.

The key geometric idea is simple: changing the axial separation between the sheaves changes the effective radius of the belt. If the movable sheave moves toward the fixed sheave, the groove becomes narrower. Since the belt has a finite width, it cannot occupy the same radial position in the narrower

groove, so it is pushed outward along the conical sheave faces. The effective belt radius therefore increases.

If the movable sheave moves away from the fixed sheave, the groove becomes wider and the belt can fall deeper between the sheaves. This reduces the effective belt radius. At this level, the mechanism is just wedge geometry: axial motion of the sheave becomes radial motion of the belt. Closing the sheaves makes the belt radius larger, while opening the sheaves makes the belt radius smaller, as shown in [Figure 1.4](#).

Placeholder: Single pulley open, middle, and closed states

Show three cross-sections of the same generic pulley:

1. open sheaves: belt sits at small effective radius,
2. intermediate sheave spacing: belt sits at medium effective radius,
3. closed sheaves: belt is pushed outward to large effective radius.

Use the same fixed/movable sheave labels as [Figure 1.3](#). Show the movable sheave translating axially and the belt moving radially.

Figure 1.4: Single-pulley radius change. As the sheaves close, the V-groove narrows and the belt is pushed outward to a larger effective radius. As the sheaves open, the belt can fall deeper in the groove and the effective radius decreases.

1.2.3 Two-Pulley Coupling and Ratio Change

The full CVT contains two of the variable-radius pulleys described above. The important difference is that the two pulleys are connected by the same belt. Because the belt length is approximately fixed, the effective radii of the two pulleys cannot change independently.

If the belt rides outward on the primary pulley, it must ride inward on the secondary pulley. Likewise, if the primary radius decreases, the secondary radius must increase. This opposite motion is the core geometric behavior that allows the CVT ratio to change. In the physical mechanism, the actual motion of the sheaves occurs through contact forces, springs, actuator mechanisms, and the axial force balance of the pulleys.

The CVT begins launch in a low-speed, high-reduction configuration. In this state, the primary pulley has a small effective radius and the secondary pulley has a large effective radius. This behaves like a low gear in a conventional drivetrain: the engine-side pulley turns relatively quickly while the downstream side turns more slowly, amplifying torque through the drivetrain.

As the CVT upshifts, the primary sheaves close and the primary effective radius increases. At the same time, the secondary effective radius decreases. The transmission therefore moves from its launch configuration toward a higher-speed configuration. By the end of the shift, the primary radius is larger and the secondary radius is smaller. This coupled motion is shown in [Figure 1.5](#).

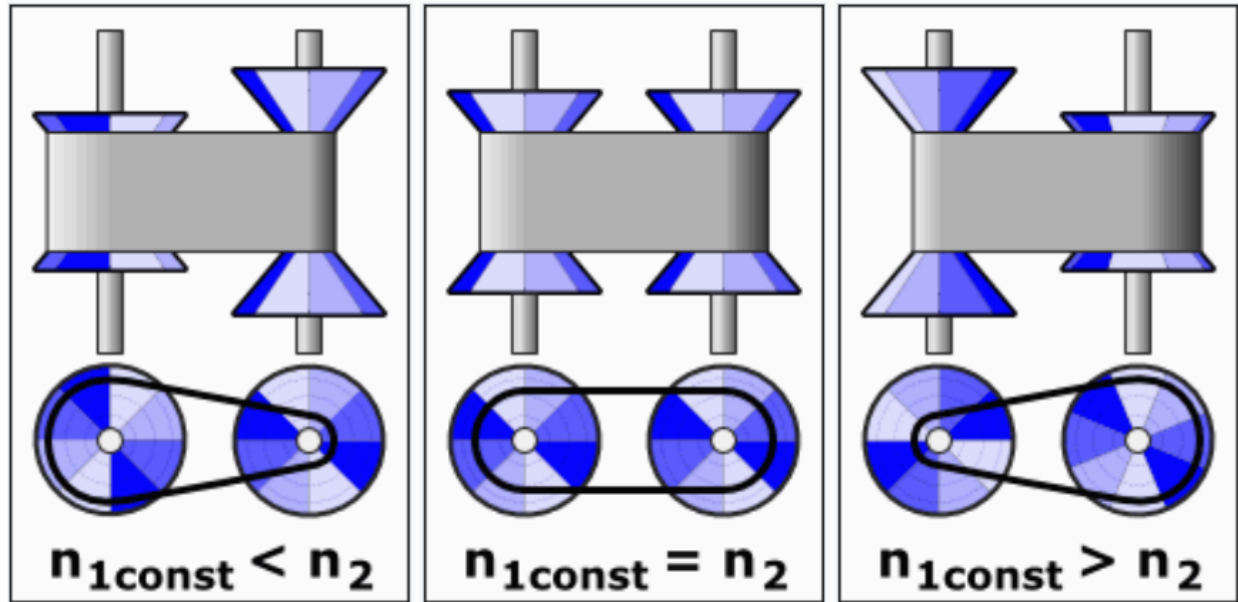


Figure 1.5: Coupled radius change in a belt-sheave CVT. Because the belt length is approximately fixed, an increase in primary effective radius is accompanied by a decrease in secondary effective radius. This coupled radius change produces the continuously variable transmission ratio.

1.2.4 Torque Transfer, Clamping Force, and Slip

The geometry described so far determines the speed relationship between the primary and secondary pulleys. However, a speed relationship alone does not guarantee that torque can be transmitted. Unlike a gear pair, the belt and pulley are not mechanically locked together by teeth. Torque is transmitted through frictional traction between the belt and the sheave faces.

For traction to develop, the belt must be physically squeezed between the sheave faces, as shown in [Figure 1.6](#). The movable sheave presses the belt into the opposite sheave, producing a clamping force across the V-groove. This clamping force creates contact pressure on the belt faces and that contact pressure allows friction to transmit tangential force around the pulley. In practical terms, transferring more torque through the CVT requires enough clamping force to create enough available traction at the belt-pulley interface.

If the available traction is not sufficient for the torque being transferred, the belt slips relative to the pulley. Slip reduces useful torque transfer and can produce heat, wear, and efficiency loss. A working CVT must therefore do two things at once: it must allow the pulley radii to change so the ratio can shift, and it must maintain enough clamping force for the belt to transmit torque without excessive slip.

This distinction is central to the rest of the model. The pulley geometry determines how the speed ratio changes. The contact mechanics determine how much torque can actually be carried through the belt-pulley contacts. A CVT is therefore not only a variable-geometry mechanism; it is also a clamping and traction problem.

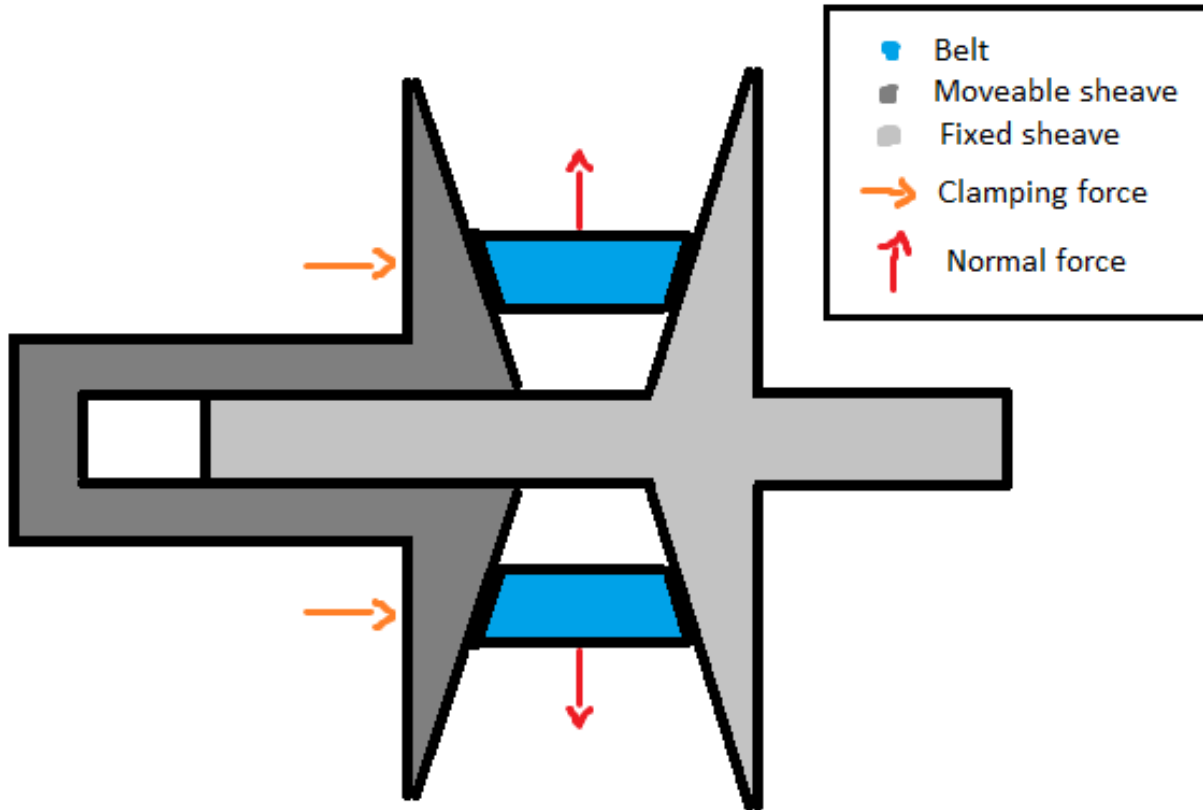


Figure 1.6: Clamping and traction in a rubber V-belt CVT. The belt must be pressed into the sheave faces to generate contact normal force. Frictional traction at this contact allows torque to be transmitted between the pulley and the belt; if the available traction is insufficient, the belt slips.

1.2.5 Mechanical Actuation in the Present CVT

Different CVTs generate radius change and clamping force in different ways. Some systems use electronic or hydraulic actuation to command pulley motion or clamping pressure directly. The system studied here is mechanically actuated: its pulley forces arise from mechanisms inside the primary and secondary pulley assemblies rather than from an externally commanded ratio.

These mechanisms are important because they determine both how the belt moves through the ratio range and how much clamping force is available for torque transfer. The primary pulley is mainly speed-sensitive, while the secondary pulley is mainly torque-reactive.

The primary pulley uses flyweights, ramps, and a spring. As engine speed increases, the flyweights move outward under centrifugal effects. The ramp surfaces convert this outward flyweight motion into a closing force on the primary sheaves. The spring resists this motion and helps set the speed at which the primary begins to close. As the primary closes, the belt is pushed outward, the primary effective radius increases, and the CVT shifts in the upshift direction introduced in [Figure 1.5](#). A conceptual view of this mechanism is shown in [Figure 1.7](#).

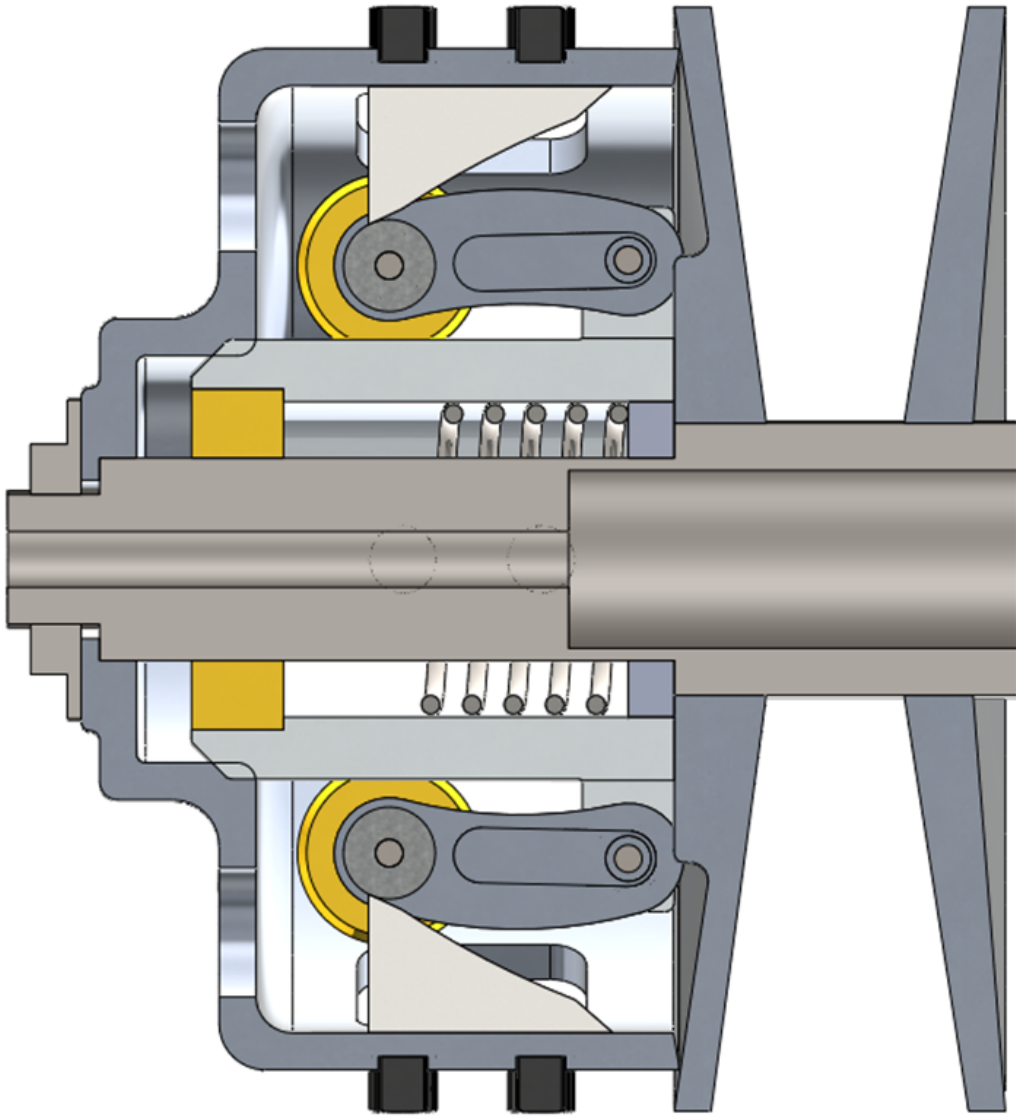


Figure 1.7: Primary pulley actuation concept. As primary speed increases, centrifugal effects drive the flyweights outward. The ramp geometry converts this motion into a closing force on the primary sheaves, while the spring resists that motion and helps set the shift behavior.

The secondary pulley uses a helix mechanism and spring loading. The helix can be understood like a screw-like interface: when torque is transmitted through the secondary, the angled helix surfaces convert part of that torque reaction into a clamping force between the sheaves. In this way, torque through the secondary helps create the clamping needed to carry torque through the belt. The spring provides preload and helps set the baseline clamping behavior.

The helix also means that secondary shift is not purely axial. As the secondary moves through its shift range, axial motion is coupled with relative rotation between secondary sheave components. This detail becomes important later when the secondary force model is developed, but the basic

intuition is simply that the helix converts torque and relative rotation into axial clamping. The secondary clamping mechanism is shown conceptually in [Figure 1.8](#).

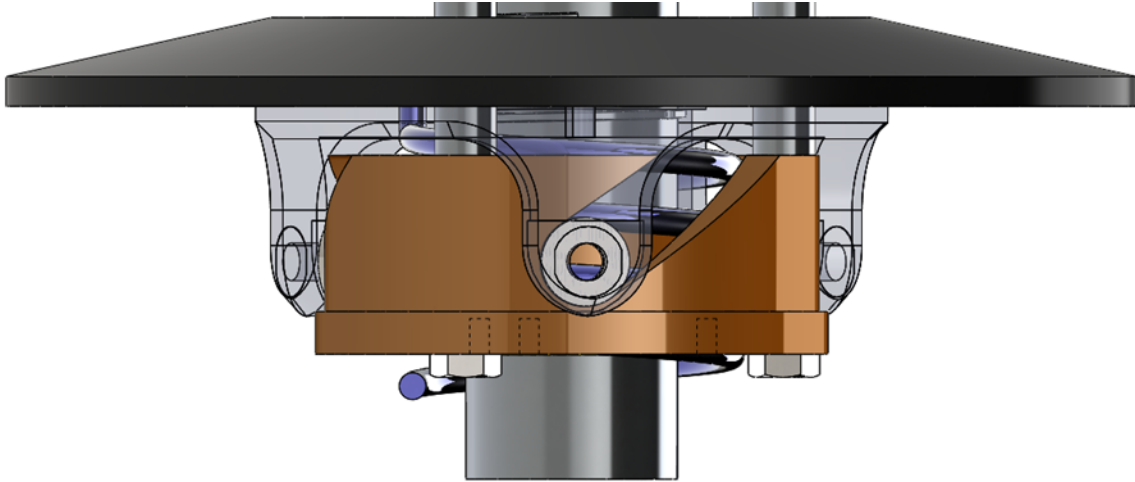


Figure 1.8: Secondary pulley actuation concept. Torque transmitted through the secondary loads the helix mechanism, which converts part of the torque reaction into clamping force between the sheaves. The helix also couples axial shift with relative rotation between secondary sheave components.

Although the primary and secondary mechanisms respond most strongly to different physical quantities, they act on the same belt and the same shift process. The primary is mainly driven by speed, the secondary is mainly driven by transmitted torque, and the resulting CVT behavior depends on their combined interaction with the belt, pulley geometry, drivetrain inertia, external load, and available clamping force.

1.2.6 Full Drivetrain Architecture

The CVT does not operate in isolation. The architecture considered in this work is shown in [Figure 1.9](#). Engine torque enters the primary pulley, passes through the belt to the secondary pulley, travels through a fixed-ratio gearbox or final drive, and ultimately produces tractive force at the wheels. The vehicle then pushes against the ground, and the resulting load feeds back into the drivetrain through inertia, grade resistance, rolling resistance, and aerodynamic drag.

Many drivetrain architectures are possible, but this engine–CVT–gearbox– wheel layout is the system modeled in this work. This system-level view is important because the CVT ratio is not simply chosen independently of the rest of the vehicle. Engine speed affects primary actuation. Transmitted torque affects secondary clamping. Vehicle load affects the torque carried by the secondary. Belt traction determines whether that torque can be carried without slip. All of these quantities evolve together during a launch.

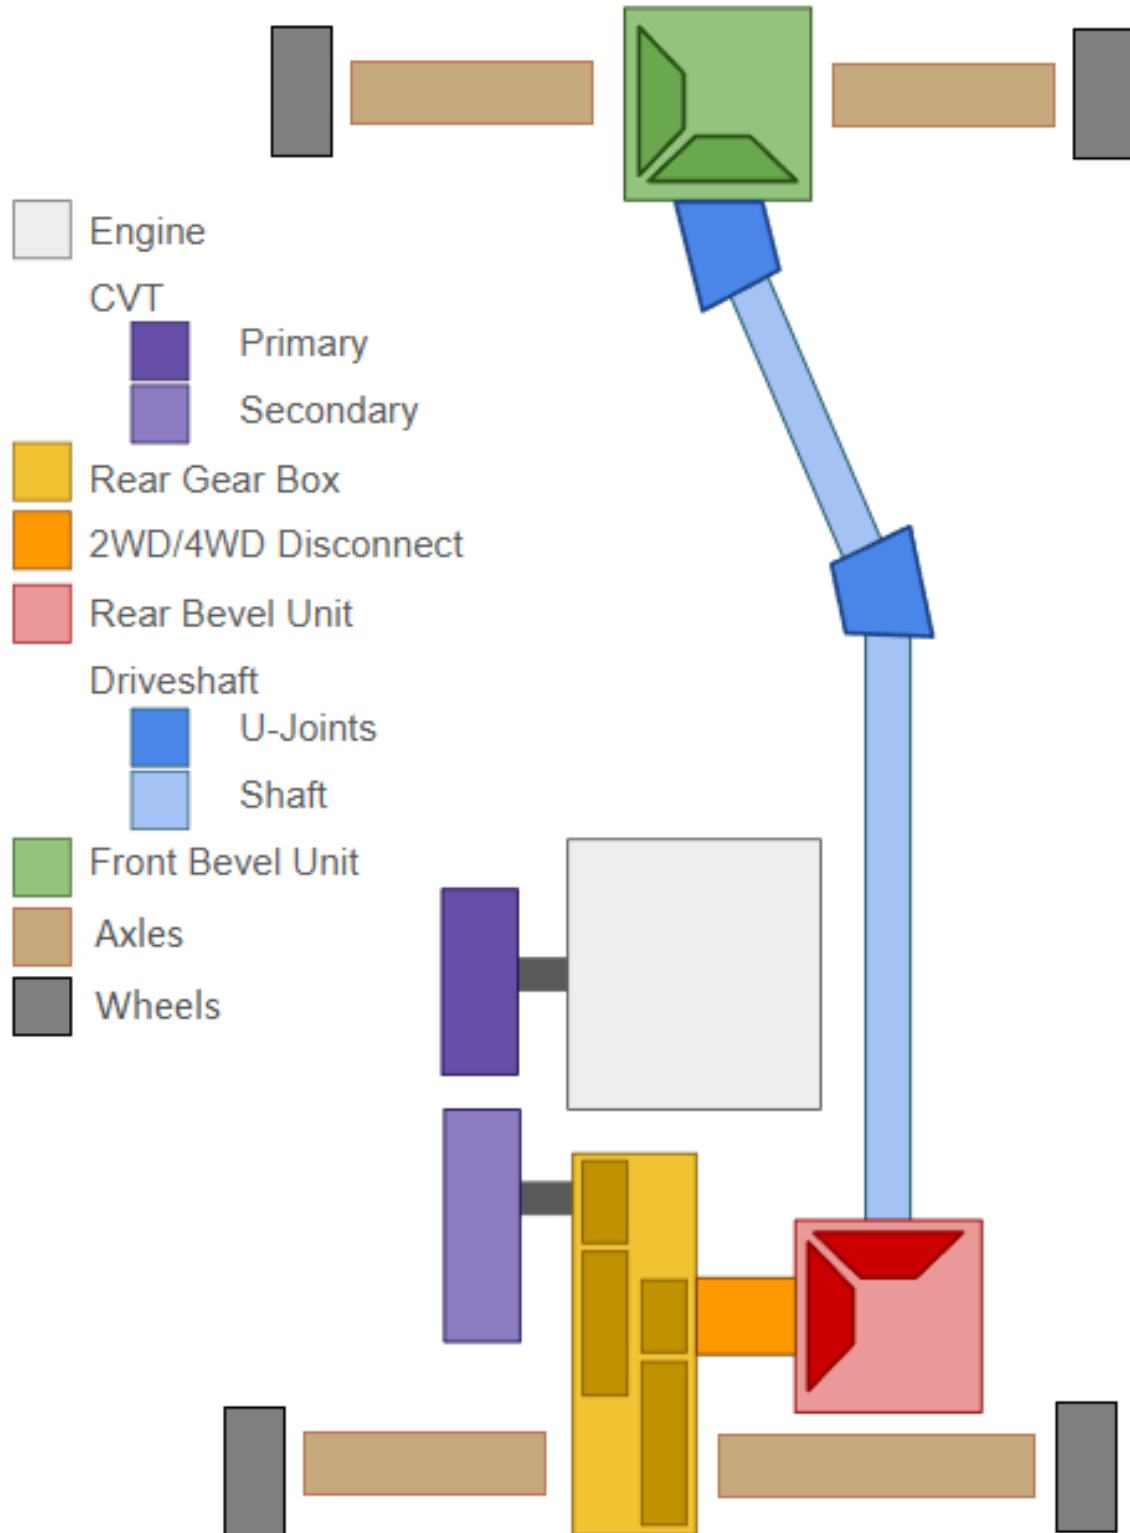


Figure 1.9: Drivetrain architecture considered in this work. Engine torque enters the primary pulley, is transmitted through the belt to the secondary pulley, passes through the downstream drivetrain, and ultimately accelerates the vehicle. The vehicle load feeds back into the CVT through the secondary side of the drivetrain.

The rest of this document turns this physical picture into a dynamic model. The geometry describes how pulley radii change during shift. The force models describe how the primary and secondary sheaves are driven. The traction model describes when torque transfer can stick and when slip occurs. The drivetrain model closes the loop between engine torque, CVT behavior, vehicle load, and vehicle acceleration. Together, these pieces explain how the CVT behaves as a coupled mechanical system during launch.

1.3 Motivation and Literature Review

CVT modelling is not a single, uniform problem. A model developed to size a variator, estimate belt efficiency, design a control strategy, or predict launch behaviour may involve the same physical components, but it will usually make different choices about which quantities are prescribed and which are solved. Some models are primarily design tools. Some focus on mechanical actuation and force balance. Some study belt forces, axial thrust, slip, or efficiency at fixed operating points. Others attempt to resolve transient shift behaviour or detailed belt-pulley contact mechanics.

The progression followed here is from design intuition, to component force balance, to mechanical actuation, to belt contact, to ratio change, to full transient launch behaviour. This ordering mirrors the way the modelling problem becomes difficult. A belt-sheave CVT can first be understood as a variable-radius transmission, then as a collection of mechanical actuators that generate axial force, then as a friction-limited belt contact problem, and finally as a coupled dynamic system whose engine speed, belt state, shift position, and vehicle motion evolve together. The literature contains strong foundations for each of these pieces, but those foundations are distributed across several modelling traditions.

1.3.1 Framework for Classifying CVT Models

A useful way to compare CVT models is to ask what part of the system is being allowed to move, and what part is being held fixed. The same physical transmission can be treated as a geometry problem, a force-balance problem, a belt-contact problem, a shift-dynamics problem, or a drivetrain problem. Each viewpoint can be useful, but each one answers a different question. This is why the literature is best read by tracking the modelling choices that define each formulation, rather than by treating all CVT models as attempts at the same final system.

One of the first choices is how the ratio is represented. In the simplest case, the transmission is evaluated at a fixed ratio. A slightly broader approach computes the ratio from a quasi-static force balance at each operating point. Other models prescribe a ratio trajectory, or use an empirical relationship for the rate of ratio change. More detailed shift models treat ratio change as a mechanical process in its own right, involving radial belt motion, pulley motion, and contact forces (Kim et al., 2002; Sorge, 2008; Cammalleri and Sorge, 2009; Sorge and Cammalleri, 2011). These approaches are not interchangeable. A fixed-ratio model can explain forces at a known condition, while a shift model tries to explain how the system moves from one condition to another.

A second choice is how axial force is produced. Some models take pulley clamping forces as known inputs. This is natural when the goal is to study belt response under specified loading, or when the variator is externally controlled. Other models include the mechanism that generates those forces, such as centrifugal weights, springs, torque-sensitive cams, hydraulic pressure, or electronic actuation (Cammalleri, 2005; Kim et al., 2002; Skinner, 2020; Sorge and Cammalleri, 2011). The important distinction is not only the actuator type, but whether clamping force is prescribed from

outside the model or emerges from the same system being simulated.

A third choice is how much of the belt-pulley contact is represented. At low fidelity, the belt may be treated through a capstan-style tension relation, often adjusted for the wedge action of the V-groove. More detailed models include radial and tangential friction, sliding angle, belt penetration, bending stiffness, local normal pressure, tension variation, slip mechanisms, and efficiency losses (Gerbert, 1996; Kim and Kim, 1989; Sorge, 1996; Kong and Parker, 2005, 2006; Chen et al., 1998; Bertini et al., 2014; Messick, 2018). At still higher fidelity, the belt may be discretized into nodes or elements so that local belt motion and contact behaviour are solved directly (Juli'o and Plante, 2011; Ballew, 2015). Increasing contact fidelity can make the local mechanics more realistic, but it also changes the purpose of the model: a model built for efficiency or local belt force prediction may not be the most transparent way to study the full drivetrain response.

A fourth choice is how the rotating system is coupled. Many models prescribe one or both pulley speeds, or impose the speed ratio algebraically. This is often appropriate for steady contact analysis, efficiency prediction, or controlled operating-point studies. Other models solve rotational equations of motion so that input speed, output speed, and transmitted torque evolve together (Srivastava and Haque, 2006; Ballew, 2015; Duan et al., 2016). Extending this further, the input may be coupled to an engine model and the output may be coupled to a dynamometer or vehicle load. This determines whether the CVT is being studied as an isolated variator or as one part of a larger powertrain.

These choices build on one another. A model can have detailed belt contact but prescribed pulley speeds. Another can include vehicle dynamics but use a simplified belt law. Another can model mechanical actuation carefully but treat shifting as quasi-static. None of these choices is inherently wrong; they reflect the question being asked. The important point is that the assumptions define the model's domain of usefulness.

Launch and clutching sit near the intersection of these choices. In that regime, ratio change, actuation, belt contact, rotational dynamics, and external loading can all matter at once. This does not make launch the only goal of CVT modelling, but it does make launch a useful stress test of model closure: a formulation that prescribes too many of these quantities may still be valuable, but it is not resolving the same coupled problem. The following review uses this framework to move from practical and quasi-static design models, to mechanical actuation and shift mechanics, to belt contact and efficiency models, to transient rubber-belt formulations, and finally to related dynamic models in metal-belt and chain CVTs.

1.3.2 Practical Design and Tuning Foundations

The practical understanding of mechanically actuated rubber V-belt CVTs developed largely through machine design and tuning practice. General machine design references such as Budynas and Nisbett (2015) provide the background needed to treat the CVT as a real mechanical assembly involving belts, springs, clutches, shafts, friction interfaces, uncertainty, and design iteration. Not all of these effects are included in a compact model, but they provide useful context for deciding which behaviours are retained and which are idealized.

Practical tuning literature provides a more application-specific foundation. Aaen (1979) describes powersport CVTs using the language of engagement speed, shift speed, flyweights, primary springs, secondary springs, torque sensing, backshift, and speed variance. Its value is not that it provides a complete dynamic model, but that it builds component-level intuition from the perspective of a tuner or racer. It explains how changes to weights, springs, ramps, and helices are expected to

affect behaviour, while leaving much of the coupled system response to experience and testing.

These sources are valuable because they describe the physical machine before it is reduced to equations. They also show why prediction is difficult: the same hardware change can affect engagement, shift rate, belt grip, backshift, engine speed, and vehicle acceleration at the same time. Qualitative tuning rules are therefore useful starting points, but they are not enough to determine the full system response under changing operating conditions.

1.3.3 Design-Oriented and Quasi-Static CVT Models

Design-oriented CVT models attempt to convert practical component knowledge into quantitative design procedures. Rather than asking how every transient state evolves in time, these models usually ask which geometry, actuator, belt, or tuning parameters should be selected to satisfy a desired operating requirement. They commonly relate vehicle requirements, pulley geometry, belt length, wrap angle, speed ratio, flyweight force, spring preload, helix force, belt tension, and torque capacity. Their main value is that they connect tunable hardware to expected operating behaviour.

A useful starting point is the numerical design method of [Arango and Muñoz Alzate \(2020\)](#), which begins from vehicle requirements, road specifications, and desired performance before working toward the CVT design. This is valuable because it places component selection in its proper context: the belt, pulley geometry, speed-ratio range, engine or motor selection, and mechanical centrifugal actuation are not independent choices, but responses to the requirements imposed by the vehicle and its operating route. In this sense, the work provides a design-level framework where system requirements drive CVT component choices.

Other design-oriented works focus more narrowly on particular parts of the variator design. [Cammalleri \(2005\)](#) develops a speed-torque-controlled rubber V-belt variator design using equilibrium relationships for a centrifugal driver and torque-sensitive driven pulley. [La Battaglia et al. \(2022\)](#) focuses on the kinematic design of motorcycle rubber V-belt CVTs, emphasizing the roller sliding profile of the front pulley as a critical design variable. Both works show how simplified mathematical models can be used to choose actuator or geometry parameters without requiring a full transient simulation of the drivetrain.

Within Baja-style applications, [Skinner \(2020\)](#) provides a practical force-balance and tuning-oriented model. The work emphasizes quantifiable tuning objectives such as engagement speed, shift-out speed, static RPM shifting, and efficient power transfer, and relates those objectives to the primary and secondary subsystems. It is useful as an applied tuning reference because it connects the variables adjusted by teams to predicted operating behaviour, while remaining primarily an operating-point and force-balance model.

The common strength of these works is that they make CVT design less arbitrary. They identify the parameters that matter and show how geometry, springs, flyweights, helices, belt forces, and vehicle requirements can be related. They also highlight a recurring tension in CVT modelling: models that are simple enough to support early design may omit important coupled behaviour, while models that resolve more detailed mechanics can become difficult to apply directly as design tools. In this sense, design-oriented and quasi-static models occupy an important middle ground. They provide usable relationships for component selection and tuning, but they do not generally describe the complete time history of clutching, slip, shift motion, and vehicle acceleration.

1.3.4 Mechanical Actuation and Clamping Force Generation

After the basic design variables are identified, the next modelling question is how the CVT generates the axial forces that clamp the belt and drive ratio change. In externally controlled CVTs, these forces may be treated as prescribed hydraulic or electronic inputs. In mechanically actuated rubber V-belt CVTs, however, the forces are produced by the hardware itself. The primary force is typically speed-sensitive, while the secondary force is torque-sensitive.

[Cammalleri \(2005\)](#) provides an important design treatment of this problem through a speed-torque-controlled rubber V-belt variator. The centrifugal driver and torque-sensitive driven pulley are treated as part of the variator design, rather than as external force inputs. This helps establish the link between actuator geometry, spring loading, pulley torque, and the intended operating behaviour of the CVT.

[Kim et al. \(2002\)](#) also study a rubber belt CVT with mechanical actuators, including both steady-state and transient characteristics. Their work is useful because it connects the mechanically generated driver and driven pulley forces to the resulting CVT behaviour. Although these earlier mechanical-actuator models include torque-reactive secondary behaviour, they simplify how torque is shared and reacted through the driven sheave assembly.

[Sorge and Cammalleri \(2011\)](#) address this secondary-side issue in more detail by studying the helical shift mechanics of rubber V-belt variators. Their work shows that the relative rotation between the driven sheaves is important to the secondary response, and that the helix should not be treated only as a simple torque-to-axial-force conversion. This makes the secondary a coupled torque-reactive mechanism whose axial force depends on helix geometry, transmitted torque, spring loading, and the internal motion of the driven pulley.

Together, these works show that mechanical actuation is more than a source of prescribed clamp force. The primary and secondary mechanisms are part of the dynamics of the variator: speed, torque, spring preload, ramp or helix geometry, and pulley motion all influence the axial forces applied to the belt. This establishes the actuator-side foundation needed before considering the belt contact and transient shift response.

1.3.5 Rubber V-Belt Contact, Slip, and Efficiency Models

Once axial force is generated by the actuation mechanisms, the belt-pulley interface determines what that force actually does. The sheaves may clamp the belt, but the resulting torque capacity, axial reaction, radial belt motion, slip, and loss all depend on how the rubber belt interacts with the pulley groove. A rubber V-belt therefore cannot be treated as an ideal kinematic constraint. It wedges into the sheaves, develops a tension distribution around the wrap, experiences radial and tangential friction, deforms under load, and dissipates energy through several mechanisms.

Classical belt theory gives the starting point: friction and wrap angle determine the maximum tension ratio that can be supported before gross sliding occurs. For V-belts, this picture is modified by the groove angle and the associated wedge effect. However, real belt slip is more complicated than a single capstan-style traction limit. [Gerbert \(1996\)](#) presents a unified treatment of belt slip in which creep, radial compliance, shear deflection, and seating/unseating effects all contribute to speed loss. The important point is not that every model must include all of these effects, but that “slip” is not one physical mechanism. A model should be clear about which slip and loss mechanisms it represents and which it leaves outside its scope.

The contact problem also determines the axial reaction felt by the sheaves. [Kim and Kim \(1989\)](#) developed a theoretical analysis of axial forces in a rubber V-belt CVT using simplified assumptions about the contact regions and belt force distribution. [Sorge \(1996\)](#) developed a compact model for axial thrust in V-belt drives, emphasizing radial penetration and the connection between belt forces and pulley thrust. These works are useful because they connect the belt contact state back to the sheave force balance: axial force is not only generated by the actuator, but also shaped by how the belt seats, slides, and transmits load in the groove.

A more detailed treatment is given by [Kong and Parker \(2005\)](#), who formulate the steady mechanics of belt-pulley systems using distributed belt equations. [Kong and Parker \(2006\)](#) extend this framework to pulley grooves and sliding friction. This line of work resolves local belt mechanics at much greater fidelity than simple force-balance models, including the distribution of forces and sliding behaviour around the contact arc.

[Messick \(2018\)](#) extends this contact-mechanics tradition for rubber V-belt CVTs by building on the Kong and Parker framework and validating axial-force and efficiency predictions experimentally. Messick’s work is valuable for its contact-region formulation, belt property measurement, operating-range analysis, and dynamometer validation. It is also clear about its modelling scope: shifting is treated as a quasi-equilibrium process rather than as a transient response-time problem. In this sense, it is a strong reference for belt force and efficiency modelling, while leaving the time evolution of the complete drivetrain to a different class of model.

Efficiency-focused studies provide another view of the same interface. [Chen et al. \(1998\)](#) experimentally investigated speed and torque losses in a rubber V-belt CVT, while [Bertini et al. \(2014\)](#) developed an analytical model for rubber V-belt CVT power losses including sliding, hysteresis, and entry/exit effects. These works show that efficiency depends on multiple interacting mechanisms, not just on whether the belt remains below a gross slip threshold.

The contact and efficiency literature therefore provides the foundation for understanding how belt force, axial thrust, slip, and loss arise. It also shows why contact fidelity must be chosen carefully. A high-fidelity contact model may be necessary for efficiency prediction, axial-force prediction, or local belt mechanics. A lower-dimensional contact model may be more appropriate when the goal is to preserve physical intuition while coupling the belt to actuator dynamics, rotational dynamics, and drivetrain response.

1.3.6 Transient Rubber-Belt Models and the Launch Problem

Transient rubber-belt models address time-dependent behaviour more directly, but “transient” can mean several different levels of closure. A model may study how the belt migrates radially during shift, how local belt elements move through the pulley contact, how the variator responds to prescribed axial forces, or how the CVT interacts with an engine and vehicle load. Launch lies near the most coupled end of this spectrum. During launch, the belt may be slipping, the engine may be accelerating, clamping forces may be changing, the secondary torque reaction depends on transmitted torque, and the vehicle load evolves as the vehicle begins to move. A launch model therefore has to manage torque transfer and ratio change while the drivetrain state is still developing.

A useful bridge between steady force-balance models and fully transient belt simulations is the shift-mechanics work of [Sorge \(2008\)](#). Sorge shows that ratio change in a rubber belt variator is not simply a sequence of steady operating points. During shift, the belt moves radially through the sheave grooves while also travelling circumferentially and transmitting torque, so belt mass

conservation, radial motion, sliding, and circumferential transport interact. [Cammalleri and Sorge \(2009\)](#) later develop approximate closed-form solutions for this shift-mechanics problem, making the theory more accessible for engineering calculations. These works isolate the mechanics of ratio change itself, without attempting to close the full engine–vehicle launch problem.

[Juli’o and Plante \(2011\)](#) developed an experimentally validated transient model of rubber-belt CVT mechanics using a discretized belt formulation. This work represents the belt as a distributed mechanical body rather than relying only on lumped contact assumptions. Its strength is that local belt motion and contact response are resolved directly. The tradeoff is that the global mechanism chain becomes less compact, and the relationship between model behaviour and a small set of practical tuning variables becomes less direct.

[Ballew \(2015\)](#) continues in the discretized-belt direction and expands the model to include engine torque output and vehicle loads such as rolling resistance and aerodynamic drag. Ballew also argues against prescribing input pulley speed, since doing so removes an important rotational degree of freedom. This makes the work especially relevant to drivetrain-level rubber-belt CVT simulation. At the same time, the reported simulations use a PI controller with feed-forward gain to generate primary axial force, fix the secondary axial force to simplify the simulation, and introduce damping between belt nodes to manage numerical behaviour. Thus, the model includes important engine and vehicle coupling, but it does not close the launch problem through a mechanically self-actuated flyweight and helix model.

The transient rubber-belt literature therefore provides important precedents, while also showing why the problem remains difficult. Shift-mechanics models clarify how ratio change occurs, discretized belt models resolve local belt behaviour, and drivetrain-coupled models show how engine and vehicle dynamics can be included. The remaining challenge is not simply to make the belt model more detailed, but to choose a level of fidelity that preserves the coupling between actuation, torque transfer, ratio evolution, and vehicle response without losing physical interpretability.

1.3.7 Adjacent Metal-Belt and Chain CVT Dynamic Models

The broader CVT literature contains an extensive dynamic modelling tradition for metal push-belt and chain CVTs, especially in automotive applications. These systems are not direct equivalents of dry rubber V-belt CVTs, but they are useful adjacent references because they show how other CVT architectures have handled shift dynamics, slip, clamping force, deformation, and validation.

[Srivastava and Haque \(2009\)](#) review the dynamics and control of belt and chain CVTs, covering modelling and control strategies for friction-limited transmissions. Their review is useful not only because it summarizes the field, but because it shows that CVT modelling has developed unevenly across architectures. Different CVT types are modelled with different assumptions, and fully dynamic, experimentally validated models remain less common than steady-state or control-oriented formulations. The review also reinforces an important distinction: rubber V-belts, metal push belts, and chains should not be treated interchangeably because their contact mechanics, actuation methods, deformation behaviour, torque capacity, and control objectives differ.

For metal belt CVTs, [Carbone et al. \(2005\)](#) study the influence of pulley deformation on shifting behaviour. Their model explains the distinction between creep-mode and slip-mode shifting and shows that pulley deformation can be essential to reproducing slow-shift behaviour under Coulomb-friction assumptions. [Yildiz et al. \(2017\)](#) later validate the Carbone–Mangialardi–Mantriota model under steady-state conditions and shift manoeuvres with torque load, supporting the usefulness of

this modelling framework for controlled metal-belt or chain CVTs.

Other metal-belt studies provide useful analogues for traction-limited behaviour and ratio-change dynamics. [Srivastava and Haque \(2006\)](#) model the dynamics of metal V-belt CVTs, while [Bonsen et al. \(2004\)](#) analyze slip behaviour and the relationship between slip and transmitted torque. These works are relevant because they treat slip and dynamic ratio change as part of the variator mechanics, even though the transmission architecture differs from a dry rubber V-belt system.

Chain CVTs provide another adjacent comparison. [Duan et al. \(2016\)](#) develop a physics-based chain CVT model beginning from the kinematics and dynamics of an infinitesimal chain segment. Their model includes speed-dependent friction, pulley axial dynamics coupled with chain radial movement, and pulley deformation. This makes the work a useful example of a physically coupled CVT formulation in which rotational dynamics, axial dynamics, contact mechanics, and friction state are treated together.

The important distinction is that these models are usually developed for lubricated automotive metal-belt or chain systems with hydraulic or electronic clamping. Their methods are therefore valuable, but their assumptions cannot be imported directly into dry rubber V-belt CVTs with mechanical flyweights, springs, and torque-sensitive helices. They show what is possible in adjacent CVT architectures, while also reinforcing the need for a formulation matched to rubber-belt contact and mechanical actuation.

1.3.8 Synthesis of Prior Work

The literature establishes a clear set of foundations. Practical and design references introduce the tuning variables and component relationships used to describe rubber V-belt CVTs. Design-oriented models connect vehicle requirements, geometry, actuator choices, and force-balance relationships to expected operating behaviour. Mechanical actuation studies explain how primary and secondary clamping forces can be generated by the hardware itself, rather than prescribed externally. Rubber V-belt contact models explain how belt force, axial thrust, tension distribution, slip mechanisms, and efficiency losses arise at the belt-pulley interface. Transient rubber-belt models show how ratio change, local belt motion, and drivetrain coupling can be treated in time. Metal-belt and chain models show that coupled axial, rotational, and traction dynamics can be modelled rigorously in adjacent CVT architectures.

The remaining difficulty is not any single missing equation, but the closure of the whole system under assumptions appropriate to a mechanically actuated dry rubber V-belt CVT. Launch and clutching sit at the intersection of several effects: engine acceleration, primary engagement, secondary torque reaction, belt traction, shift motion, and vehicle load. Treating any one of these as prescribed can be reasonable for a focused study, but it changes the problem being solved. The challenge is therefore to choose a level of fidelity that preserves the dominant couplings without making the model too detailed to interpret or use for tuning.

Table [1.1](#) summarizes the main model families discussed in this review. The table is intended as a map of modelling emphasis rather than a ranking of model quality.

Table 1.1: Comparison of representative CVT model families.

Model family	Representative works	Shift treatment	Rotational / drivetrain dynamics	Actuation treatment	Contact fidelity	Launch / clutching treatment
Practical tuning and design references	Aaen (1979), Budynas and Nisbett (2015)	Qualitative	Limited	Qualitative mechanical descriptions	Conceptual or component-level	Qualitative tuning guidance
Design-oriented and quasi-static models	Arango and Mu noz Alzate (2020), Cammalleri (2005), La Battaglia et al. (2022), Skinner (2020)	Fixed, mapped, or quasi-static	Often simplified	Geometry and force-balance based	Low to medium	Usually simplified
Mechanical actuation and clamping force generation	Cammalleri (2005), Kim et al. (2002), Sorge and Cammalleri (2011)	Steady, quasi-static, or empirically transient	Often simplified	Mechanical primary and secondary actuation considered	Medium	Limited or indirect
Rubber V-belt contact, slip, and efficiency models	Gerbert (1996), Kim and Kim (1989), Sorge (1996), Kong and Parker (2005), Kong and Parker (2006), Messick (2018), Chen et al. (1998), Bertini et al. (2014)	Mostly fixed-ratio or quasi-equilibrium	Often limited	Usually prescribed operating conditions	Medium to high	Rarely central
Transient rubber-belt and shift models	Sorge (2008), Cammalleri and Sorge (2009), Juli'o and Plante (2011), Ballew (2015)	Dynamic or approximate transient shift	Varies from local belt dynamics to engine / vehicle coupling	Prescribed, controlled, simplified, or separate from full mechanical closure	Medium to high	Partial or assumption-dependent
Metal-belt and chain dynamic models	Srivastava and Haque (2009), Srivastava and Haque (2006), Bonsen et al. (2004), Carbone et al. (2005), Yildiz et al. (2017), Duan et al. (2016)	Dynamic	Often high	Hydraulic, electronic, or prescribed clamping	High for metal/chain systems	Architecture dependent
Present formulation, for comparison	This document	Dynamic shift coordinate	Engine, CVT, and vehicle coupled	Mechanical flyweight, spring, helix, and torque feedback	Lumped rubber belt with traction admissibility	Launch and clutching included

1.4 Aim, Scope, and Contributions

The literature review in Section 1.3 motivates a specific modelling objective: to build a physically interpretable dynamic formulation for a mechanically actuated dry rubber V-belt CVT coupled to a vehicle drivetrain. The model is not intended to be the highest-fidelity representation of rubber belt contact, nor a complete loss model for efficiency prediction. Its purpose is to close the dominant system-level mechanisms into a single time-domain formulation so that actuation, shift behaviour, torque transfer, and vehicle response can be studied together.

1.4.1 Aim

The technical aim of this work is to derive a coupled nonlinear dynamic model of the CVT and drivetrain from the engine-side pulley to the vehicle wheel. The model is formulated so that pulley speeds, torque transfer, axial shift position, and vehicle motion evolve from the governing equations rather than being prescribed independently. This allows launch, shift, and traction-limited behaviour to be simulated directly in time.

The pedagogical aim is equally important. The model is written as a derivation document, not only as a simulation tool. Each major modelling step is developed from physical principles so that the reader can follow how geometry, actuator forces, belt traction, rotational dynamics, and vehicle loading enter the final system. The goal is for the model to build intuition: a reader should be able to understand not only what the simulation predicts, but why the system behaves that way.

1.4.2 Scope

The system considered in this work is a mechanically actuated dry rubber V-belt CVT coupled to a simplified vehicle drivetrain. The CVT consists of a speed-sensitive primary pulley, a torque-sensitive secondary pulley, a rubber V-belt, and a downstream gearbox feeding to the wheels of the vehicle. The model focuses on launch and shift behaviour under one-dimensional longitudinal vehicle motion.

The model includes the following effects:

- variable pulley geometry and belt-length closure;
- ratio kinematics relating shift position to pulley radii, wrap angles, and transmission ratio;
- mechanically generated primary and secondary axial forces;
- spring, ramp, helix, and torque-reactive effects in the actuation mechanisms;
- dynamic axial shift motion with the effective inertia of moving CVT components;
- explicit rotational dynamics for the engine-side and vehicle-side pulleys;
- torque transfer through the belt subject to belt-pulley traction limits;
- engine torque and engine-side inertia;
- vehicle load torque from longitudinal road-load dynamics;
- coupled launch and shift response in time.

Several effects are intentionally idealized or excluded. The belt is represented through a lumped geometric and traction model rather than a full distributed rubber contact model. The model accounts for whether the belt-pulley contacts can support the required torque, but it does not separately resolve the individual slip mechanisms identified in detailed belt-slip literature, such as creep, radial compliance, shear deformation, seating and unseating, or local rubber hysteresis. Local belt deformation, detailed radial penetration, temperature effects, belt wear, sheave compliance, detailed tribology, and full three-dimensional vehicle dynamics are also not resolved.

This scope also makes the formulation extensible. Because the assumptions are stated explicitly and the model is derived step by step, later work can replace individual closures with higher-fidelity alternatives. For example, the traction model could be replaced with a distributed contact model, the belt could be made elastic, pulley deformation could be introduced, or thermal and efficiency losses could be added without changing the overall structure of the framework.

1.4.3 Contributions

The primary contribution of this work is not any single component model in isolation. Many of the individual ingredients, such as belt geometry, centrifugal actuation, torque-sensitive secondary behaviour, traction limits, and vehicle loading, build on established ideas in CVT and belt-drive modelling. The contribution is the way these ingredients are organized into a single physically interpretable dynamic formulation for a mechanically actuated dry rubber V-belt CVT.

The main contributions are as follows:

1. A coupled time-domain formulation for a mechanically actuated rubber V-belt CVT connected to engine-side and vehicle-side dynamics.
2. A geometric closure that relates axial shift position to pulley radii, wrap angles, belt length, transmission ratio, and ratio evolution.
3. A mechanical actuation formulation in which the primary and secondary axial forces are generated by the modelled hardware rather than prescribed as external inputs.
4. A dynamic treatment of ratio change in which the shift coordinate evolves as a physical state of the system rather than being imposed from a prescribed ratio map or instantaneous equilibrium condition.
5. A torque-transfer formulation that allows belt-pulley traction limits to constrain the transmitted torque when the no-slip response is not admissible.
6. An explicit coupling between CVT behaviour and drivetrain response, allowing engine speed, pulley speeds, belt torque transfer, vehicle load, and vehicle acceleration to evolve together.
7. A launch-capable system closure in which clutching, torque transfer, shift behaviour, and vehicle acceleration emerge from the interaction of the modelled mechanisms.
8. A derivation structure intended to preserve physical intuition and provide a modular foundation for future extensions, such as higher-fidelity belt contact, belt elasticity, pulley deformation, thermal effects, or efficiency losses.

The central contribution is therefore the closure of the mechanism chain. Rather than prescribing the ratio, shift rate, pulley speeds, or clamp forces independently, the formulation allows the system trajectory to emerge from mechanical actuation, belt traction, rotational inertia, and vehicle load. This makes the model useful for studying how tuning and design changes propagate through the CVT, from component geometry and spring loading, to torque transfer and shift response, to vehicle acceleration.

Chapter 2

Model Setup

2.1 System Definition

Placeholder

2.2 Modeling Assumptions

The following assumptions define the modeling scope and physical idealizations used in the CVT dynamic formulation. These assumptions establish the limits within which the derived equations remain valid.

2.2.1 Material and Structural Idealizations

Assumption 1 (Constant Material Properties)

Material properties of structural components are treated as constant. No temperature-dependent material variation is modeled. Thermal effects are not solved as part of this system.

Assumption 2 (Rigid Structural Components)

All structural components (pulleys, shafts, housing) are modeled as rigid bodies. Elastic deformation under operational loading is neglected. The belt is assumed axially rigid (no longitudinal stretch), while still conforming geometrically around pulleys.

Assumption 3 (Negligible Wear and Surface Evolution)

Component wear, belt degradation, and pulley surface evolution are neglected. The model represents short-term operational behavior.

2.2.2 Contact and Friction Modeling

Assumption 4 (Idealized Belt–Pulley Friction Law)

Belt traction is modeled using a simplified dry-friction law with an explicit stick–slip transition rule. The model distinguishes between gross adhered contact and gross slipping contact at each pulley. Microscopic contact mechanics, rubber hysteresis, local creep, partial slip within the contact patch, lubrication effects, and detailed Stribeck behavior are not explicitly modeled.

Assumption 5 (Constant Effective Friction Coefficient)

The belt–pulley coefficient of friction is treated as constant. It does not evolve with temperature, wear, belt conditioning, surface contamination, normal pressure, or slip speed. Separate static and kinetic friction coefficients may be used, but each is treated as constant during a given simulation.

Assumption 6 (Averaged Contact Distribution)

Contact pressure and traction over the pulley wrap angle are treated as effectively uniform or averaged. Localized edge loading and non-uniform stress distributions are neglected.

Assumption 7 (Gross Tangential Traction Approximation)

Belt–pulley traction is resolved only in the gross tangential direction around each pulley wrap. Radial belt migration through the sheave groove during shift is not modeled as a separate friction demand. Local radial sliding, local creep, and contact redistribution associated with radial belt motion are not resolved.

Assumption 8 (Equal Secondary Sheave-Face Torque Partition)

The torque transmitted from the belt to the secondary pulley is treated as equally shared between the fixed and movable secondary sheave faces. Face-level torque redistribution between the fixed and movable sheaves is not resolved. Changes in torque share due to helix-induced relative rotation, local belt deformation, contact pressure redistribution, and face-level microslip are neglected.

2.2.3 Geometric and Kinematic Idealizations

Assumption 9 (Perfect Axis Alignment)

Primary and secondary pulley axes are assumed perfectly aligned. Misalignment, shaft eccentricity, and geometric runout are neglected.

Assumption 10 (Constant Belt Length)

The belt length is treated as constant. Longitudinal elasticity, transient stretch, permanent creep, and progressive elongation are not modeled. Effective pulley radii are determined solely from geometry and belt-length constraints.

Assumption 11 (Single Belt Transport Speed)

The belt is represented by a single lumped transport speed. Internal belt shear, belt span vibration, local belt stretch, and separate belt speeds on the two sheave faces are not resolved.

Assumption 12 (Uniform Contact Radius Around Wrap)

At any given instant, the belt contacts each pulley at a single, uniform effective radius throughout the entire wrap angle. The contact radius is constant around the circumference of contact, with no spiral or progressive radial variation along the wrap. While the effective radius may evolve with axial shift position, it remains spatially uniform at each time instant.

2.2.4 Dynamic and Inertial Modeling

Assumption 13 (Lumped Inertia Representation)

Rotational inertias of the engine, pulleys, drivetrain, and wheels are represented as lumped equivalent inertias. Distributed shaft flex and torsional compliance are neglected.

Assumption 14 (Negligible Vibrational Effects)

High-frequency vibrational effects, structural resonances, and drivetrain oscillations are neglected. The model captures dominant rigid-body dynamics only.

Assumption 15 (Negligible Parasitic Friction)

Frictional losses in non-critical components (e.g., bearings, seals, auxiliary shafts) are neglected. Only friction directly relevant to belt traction and CVT torque transfer is modeled.

Assumption 16 (No Explicit CVT Loss or Thermal Model)

The model resolves torque transfer, traction admissibility, and slip state. Heat generation, temperature rise, wear, and efficiency loss are not solved. Power dissipated during slip is not propagated into a thermal, wear, or degradation model.

2.2.5 Environmental and Operational Scope

Assumption 17 (Negligible Gravitational Influence on CVT Internals)

Gravitational forces acting on CVT internal components are negligible relative to centrifugal and contact forces at operating speeds.

Assumption 18 (Full-Throttle Engine Model)

The engine is modeled using a prescribed full-throttle torque curve. Load feedback modifies engine speed dynamically, but part-throttle dynamics and throttle transients are not explicitly modeled.

2.3 Reference Material

This section records any information for easy reference.

2.3.1 Coordinate and Sign Conventions

A consistent set of coordinate directions and sign conventions is adopted throughout this document. All equations follow these conventions.

Vehicle Longitudinal Coordinate and Incline Angle

Vehicle motion is modeled along a single longitudinal coordinate that follows the surface of the road.

The coordinate x is defined locally along the direction of travel, tangent to the road surface. The positive direction, $+x$, corresponds to the forward direction of vehicle motion.

Because the road may be inclined relative to horizontal, the local direction of the x axis depends on the road slope. The incline angle is denoted by α and is measured between the road surface and a

horizontal reference line.

$\alpha > 0$: uphill in the $+x$ direction

$\alpha < 0$: downhill in the $+x$ direction

As illustrated in [Figure 2.1](#), the x direction always lies tangent to the road surface. Consequently, the orientation of the longitudinal axis varies with the local road incline α .

Vehicle velocity is defined along this coordinate. A velocity $v > 0$ corresponds to motion in the forward $+x$ direction along the road, while $v < 0$ corresponds to motion in the opposite direction.

These definitions establish the geometric orientation of vehicle motion and the sign convention for road incline used throughout the model.

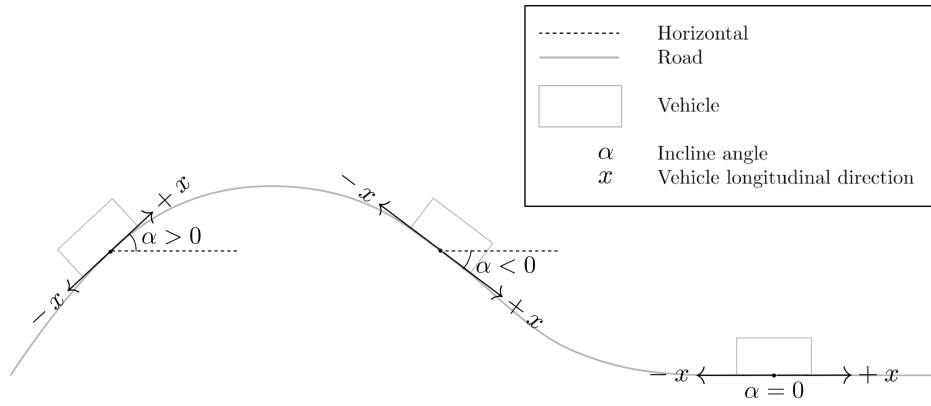


Figure 2.1: Definition of the longitudinal vehicle coordinate and incline angle. The coordinate x is defined tangent to the road surface and points in the forward direction of travel. The road incline α is measured relative to the horizontal reference line. Positive α corresponds to uphill motion in the $+x$ direction, while negative α corresponds to downhill slope.

Rotational Sign Convention

All rotating components in the drivetrain follow a consistent angular sign convention defined relative to forward vehicle motion.

The positive longitudinal direction $+x$ was defined previously as the forward direction of travel along the road surface. The rotational directions of all drivetrain components are chosen such that positive rotation produces vehicle motion in this $+x$ direction.

As illustrated in [Figure 2.2](#), positive wheel angular velocity $\omega_w > 0$ corresponds to wheel rotation that drives the vehicle forward along $+x$.

The same convention is propagated upstream through the drivetrain. Positive rotation of the secondary pulley, $\omega_s > 0$, corresponds to the direction of rotation that produces this forward wheel motion through the final reduction gearbox and axle.

Likewise, positive rotation of the primary pulley, $\omega_p > 0$, corresponds to the direction that drives the secondary pulley in this same sense through the CVT belt.

Engine angular velocity follows the same convention. The engine rotates positively when it drives the primary pulley in the defined positive direction.

Torque follows the same sign convention. A torque is considered positive when it acts in the defined positive rotational direction and therefore tends to increase the corresponding angular velocity.

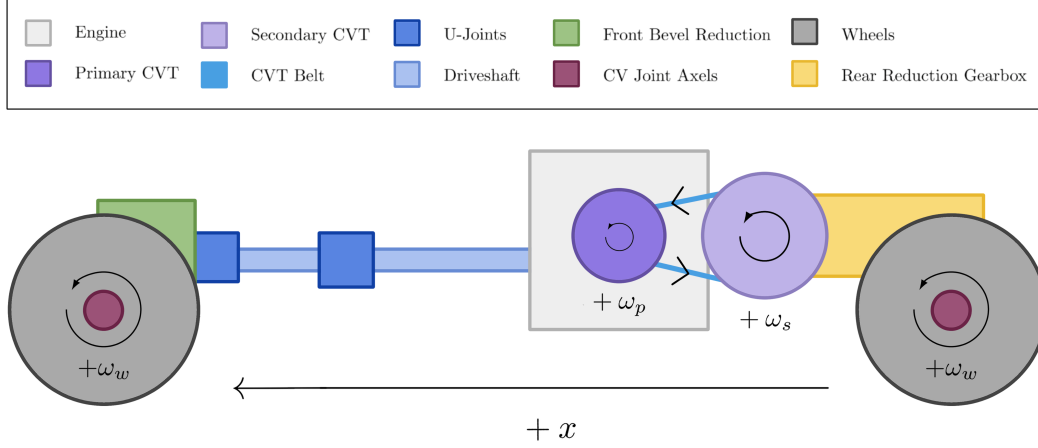


Figure 2.2: Rotational sign convention for the drivetrain. Positive angular velocities for the wheels (ω_w), secondary pulley (ω_s), and primary pulley (ω_p) are defined such that drivetrain rotation produces forward vehicle motion along the $+x$ direction.

CVT Axial Direction

The axial coordinate of the primary pulley is defined along the axis of the pulley shaft, parallel to the pulley centerline and perpendicular to the plane of belt rotation.

In the reference configuration shown in [Figure 2.3](#) (left), the primary pulley is fully open. The movable sheave is separated from the fixed sheave by the initial gap, and this configuration defines the origin of the axial coordinate.

The axial variable s measures the translation of the movable sheave relative to this open configuration.

$$s = 0 \quad : \text{fully open configuration}$$

A positive value of s corresponds to the movable sheave translating toward the fixed sheave along the pulley axis.

$$s > 0 \quad : \text{sheave closing motion}$$

As the movable sheave closes, the belt is squeezed between the conical faces and is forced outward along the pulley ramps. This increases the effective belt radius on the primary pulley and corresponds to an upshift of the transmission.

The maximum displacement $s = S_{\max}$ corresponds to the fully closed configuration shown in [Figure 2.3](#) (right).

Although s is defined using the primary pulley, the motion cannot occur independently. Because the belt length remains constrained, closure of the primary pulley forces the secondary pulley to open. The precise geometric relationship between these motions will be derived later.

Axial velocity follows the same sign convention: $\dot{s} > 0$ corresponds to the movable sheave translating toward the fixed sheave.

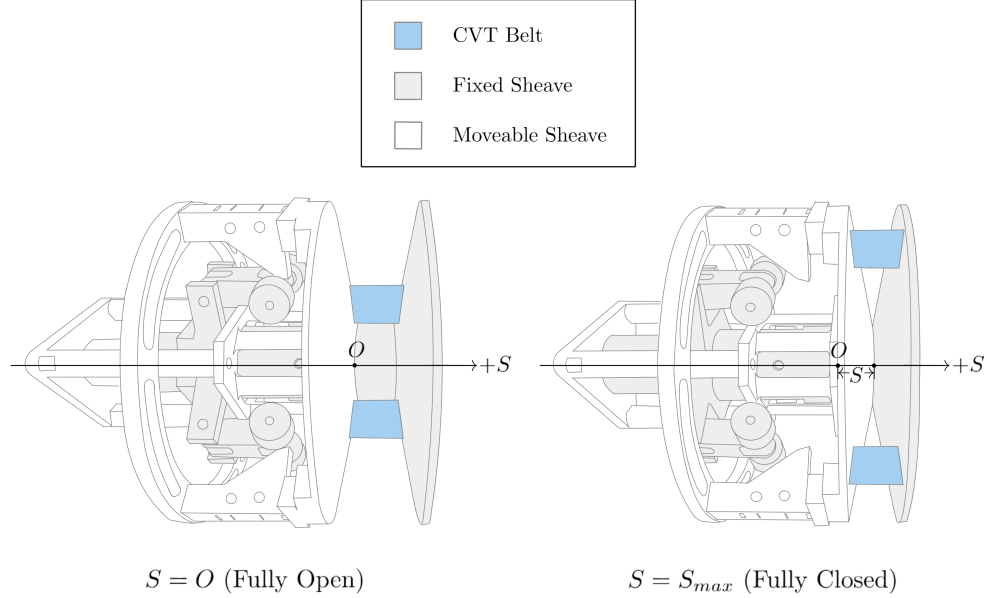


Figure 2.3: Definition of the primary axial coordinate. The system begins in an open configuration. The axial displacement s measures how much the movable sheave has closed from this initial position. Increasing s increases primary effective radius and is coupled to secondary axial motion.

Radial and Tangential Directions

Within the plane of pulley rotation, directions are defined using the standard polar coordinate convention commonly used in rotational mechanics.

At any point in the plane, two orthogonal directions are defined: the radial direction $\hat{e}_r$ and the tangential direction $\hat{e}_\theta$. These directions form a local coordinate basis centered on the pulley axis.

The radial direction lies in the plane of rotation and points directly outward from the center of the pulley. A radial force is defined as positive when it acts away from the center of rotation. Thus, $F_r > 0$ corresponds to a force directed outward along $\hat{e}_r$.

The tangential direction lies in the plane of rotation and is perpendicular to the radial direction. The positive tangential direction $\hat{e}_\theta$ is defined to be consistent with the positive rotational convention introduced in [Section 2.3.1](#). Tangential motion in this direction corresponds to motion produced by positive angular velocity.

Figure [2.4](#) illustrates these directions using physical examples from the primary pulley. The

centrifugal flyweights generate outward radial forces F_r , while the belt moves along the tangential direction with velocity v_t . These quantities serve as representative examples of forces and motion that act along the radial and tangential directions.

The previously defined axial direction is perpendicular to this plane of rotation and points along the pulley shaft, into the page.

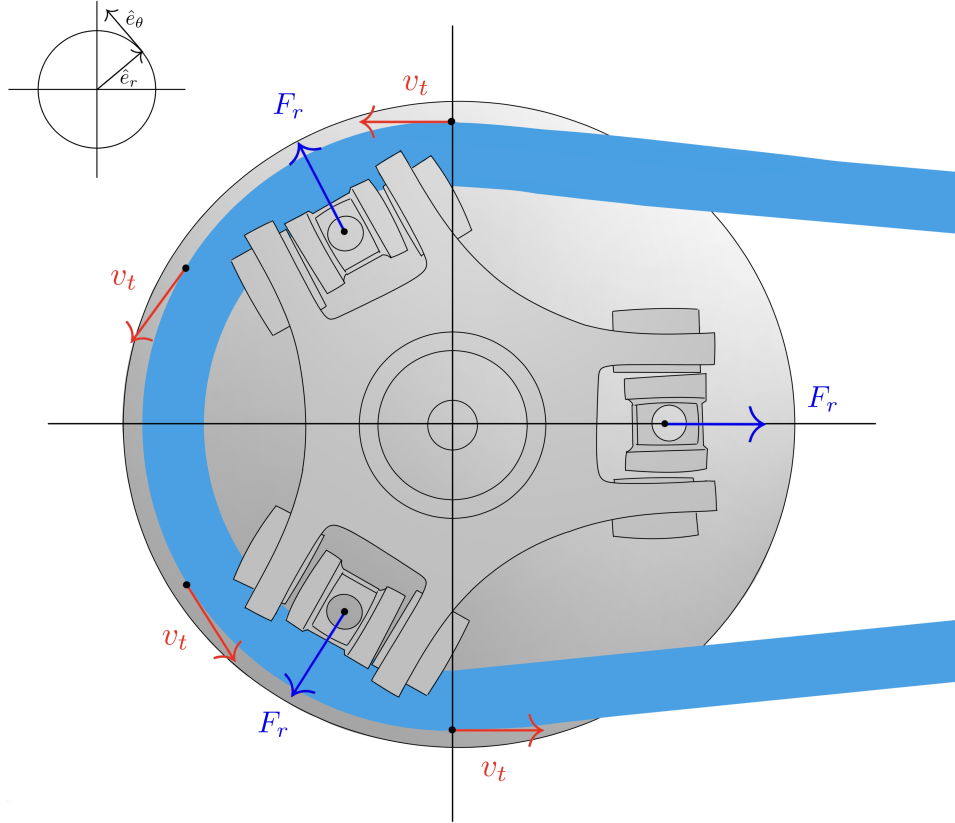


Figure 2.4: Radial and tangential directions in the plane of pulley rotation. The radial direction $\hat{e}_r$ points outward from the center of the pulley, while the tangential direction $\hat{e}_\theta$ is perpendicular to $\hat{e}_r$ and aligned with positive rotation. Example quantities illustrated include outward radial forces F_r generated by flyweights and tangential belt velocity v_t . For reference, the previously defined axial coordinate s is perpendicular to the page in this view and points along the pulley shaft, into the page.

2.4 Governing Principles

Theory 1: Newton's Second Law (Translation)

Equation

$$\sum F = ma$$

Description

- $\sum F$ is the net force (N)
- m is mass (kg)
- a is acceleration (m/s²)

Source

Standard mechanics identity.

Derivation

From the definition of acceleration and empirical laws of motion; used here as a governing relationship.

Theory 2: Newton's Second Law (Rotation)

Equation

$$\sum \tau = I\alpha$$

Description

- $\sum \tau$ is net torque (N m)
- I is moment of inertia (kg m²)
- α is angular acceleration (rad/s²)

Source

Standard rigid-body dynamics identity.

Derivation

Standard rigid-body rotational dynamics relationship.

Theory 3: Torque Definition

Equation

$$\tau = Fr$$

Description

- τ is torque (N m)
- F is tangential force (N)
- r is moment arm radius (m)

Source

Standard mechanics identity.

Derivation

Defines torque as the product of tangential force and moment arm. Equivalently, $F = \tau/r$ gives the tangential force from a known torque.

Theory 4: Kinetic Energy (Translational)

Equation

$$T = \frac{1}{2}mv^2$$

Description

- T is kinetic energy (J)
- m is mass (kg)
- v is velocity (m/s)

Source

Standard mechanics identity.

Derivation

Translational kinetic energy of a point mass or rigid body moving with velocity v .

Theory 5: Centrifugal Force

Equation

$$F_c = m\omega^2 r$$

Description

- F_c is centrifugal force (N)
- m is mass (kg)
- ω is angular velocity (rad/s)
- r is radius from the axis of rotation (m)

Source

Standard circular-motion identity.

Derivation

Derived from circular motion kinematics where $a_c = \omega^2 r$, then applying $F = ma$.

Theory 6: Hooke's Law (Compressional)

Equation

$$F = k\Delta x$$

Description

- F is force (N)
- k is spring constant (N/m)
- Δx is displacement (m)

Source

Standard linear-elastic constitutive identity.

Derivation

Linear spring constitutive relationship in the elastic regime.

Theory 7: Hooke's Law (Torsional)

Equation

$$F = \frac{k\Delta\theta}{r}$$

Description

- F is force (N)
- k is torsional spring constant (N m/rad)
- $\Delta\theta$ is angular deflection (rad)
- r is torque arm radius (m)

Source

Standard torsional spring identity.

Derivation

Starting from $\tau = k\Delta\theta$ and $\tau = Fr$, then $F = \frac{k\Delta\theta}{r}$.

Theory 8: Engine Torque from Power

Equation

$$\tau = \frac{P}{\omega}$$

Description

- τ is torque (N m)
- P is power (W)
- ω is angular velocity (rad/s)

Source

Standard rotational power identity.

Derivation

From the rotational power relationship $P = \tau\omega$.

Theory 9: Coulomb Friction

Equation

$$F_f = \mu_s F_n$$

Description

- F_f is friction force (N)
- μ_s is coefficient of static friction (unitless)
- F_n is normal force (N)

Source

Standard dry-friction model identity.

Derivation

Coulomb friction model for impending slip.

Theory 10: Capstan Equation

Equation

$$T_1 = T_2 e^{\mu\theta}$$

Description

- T_1 is tight-side belt tension (N)
- T_2 is slack-side belt tension (N)
- μ is belt–pulley friction coefficient (unitless)
- θ is wrap angle (rad)

Source

[ScienceDirect Topics](#) (n.d.).

Derivation

Differential force balance on an infinitesimal belt element on a pulley yields $\frac{dT}{T} = \mu \, d\theta$, then integrate over wrap.

Theory 11: Density

Equation

$$\rho = \frac{m}{V}$$

Description

- ρ is density (kg/m³)
- m is mass (kg)
- V is volume (m³)

Source

Standard definition.

Derivation

Definition of density.

Theory 12: Air Resistance (Quadratic Drag)

Equation

$$F_d = \frac{1}{2}\rho v^2 C_d A$$

Description

- F_d is drag force (N)
- ρ is fluid density (kg/m³)
- v is object speed relative to fluid (m/s)
- C_d is drag coefficient (unitless)
- A is reference area (m²)

Source

Standard aerodynamic drag model identity.

Derivation

Standard empirical/derived quadratic drag model; applicable at moderate to high Reynolds number.

Theory 13: Rolling Resistance

Equation

$$F_r = C_r N$$

Description

- F_r is rolling resistance force (N)
- C_r is coefficient of rolling resistance (unitless)
- N is normal force (N)

Source

Standard rolling-resistance model identity.

Derivation

Rolling resistance arises from deformation of contact surfaces (tire and road). For a vehicle on level ground, $N = mg$ where m is vehicle mass and g is gravitational acceleration.

Theory 14: Gravitational Force

Equation

$$F_g = mg$$

Description

- F_g is gravitational force (N)
- m is mass (kg)
- g is gravitational acceleration (m/s^2)

Source

Standard near-Earth mechanics identity.

Derivation

Near Earth's surface, $g \approx 9.81 \text{ m/s}^2$. On an incline with angle θ , the component parallel to the surface is $F_g \sin \theta$.

2.4.1 Model Quantity Roles and Evaluation Flow

The model distinguishes between quantities specified for a CVT configuration, quantities derived once during setup, dynamic states advanced in time, and algebraic quantities evaluated from the current state. Here, *fixed* means fixed during one simulation run. A fixed quantity may still be changed when a different CVT configuration or operating case is defined.

The physical constants and fixed material properties used by the model are listed in ??, while the

user-specified CVT, belt, and drivetrain parameters are listed in ???. These specified quantities include the belt length, belt cross-section, sheave geometry, and endpoint pulley radii. They define the particular CVT being modeled, but they are not dynamic states.

The center-to-center distance is different. It is not prescribed independently in the present parameterization. Instead, it is derived once from the specified belt length and the known reference pulley radii, as developed in [Section 3.1.4](#). It is then retained as a fixed geometric quantity for the remainder of the run.

Table 2.1: Roles of quantities in the model evaluation.

Role	Assigned or evaluated	Examples
Physical constants and fixed properties	Before simulation	g , material densities, and other values treated as invariant within the model scope.
Specified configuration parameters	Before geometry initialization	L_b , b_{in} , h_b , sheave angle β , and endpoint pulley radii.
Derived fixed geometry	Once during geometry initialization	Center-to-center distance C .
Dynamic state variables	Advanced by the ODE integrator	ω_p , ω_s , s , $\dot{s}$, and v_b .
State-dependent algebraic quantities	At each evaluation of the system equations	$r_p(s)$, $r_s(s)$, λ , wrap angles, span length, effective radii, and other current geometry quantities.

The calculation has two levels. Geometry initialization first uses the specified configuration data to establish C . During the simulation, each evaluation of the system equations begins from the current state. The shift coordinate gives the primary radius, the fixed belt-length condition gives the compatible secondary radius, and the remaining belt-path quantities then follow directly from the current geometry:

$$\mathbf{x}(t) \longrightarrow s \longrightarrow r_{p,\text{outer}}(s) \longrightarrow r_{s,\text{outer}}(s) \longrightarrow \lambda, \phi_p, \phi_s, \ell \longrightarrow \text{forces, torques, and } \dot{\mathbf{x}}.$$

The secondary-radius calculation is an algebraic geometry closure within an evaluation of the system equations; it is not an additional dynamic state. Once the two radii are known, λ , the wrap angles, and the straight-span length are evaluated directly. A numerical time integrator may evaluate the system equations multiple times within one time step, so this geometry closure is performed for each such evaluation rather than only once per accepted time step.

2.5 System State Definition

The dynamic behavior of the CVT system is described using a set of *state variables*. A state variable is a quantity whose future evolution is determined by its current value and the governing differential equations of the system.

In numerical simulation, state variables are the quantities that are explicitly integrated forward in time. All other model quantities — such as torque transfer, transmission ratio, belt forces, and contact conditions — are computed algebraically from these states.

2.5.1 State Vector

State Vector	(2.5.1)
$\mathbf{x}(t) = \begin{bmatrix} \omega_p \\ \omega_s \\ s \\ \dot{s} \\ v_b \end{bmatrix}$	

where:

- ω_p is the angular speed of the primary pulley (rad/s),
- ω_s is the angular speed of the secondary pulley (rad/s),
- s is the axial shift position of the primary sheave (m),
- $\dot{s}$ is the axial shift velocity (m/s).
- v_b is the belt transport speed (m/s).

2.5.2 Independent Dynamic Degrees of Freedom

The five state variables above are the dynamic degrees of freedom of the present state-space model.

The primary pulley can rotate independently under engine input and belt interaction. Its angular speed ω_p therefore represents one rotational degree of freedom.

The secondary pulley also rotates and interacts with both the belt and the external drivetrain load. Its angular speed ω_s represents a second independent rotational degree of freedom.

In addition to rotation, the CVT includes axial motion of the primary sheave. This axial displacement s determines the effective pulley geometry and therefore the transmission ratio. The axial motion is mechanically independent of pure rotation and must be modeled explicitly.

Because axial motion follows second-order dynamics, both the axial position s and its rate $\dot{s}$ are required to fully describe its evolution.

The quantity v_b is treated as an independent belt-transport degree of freedom. While detailed internal belt mechanics remain unresolved, v_b is modeled as a dynamic state whose evolution is given by an explicit equation of motion derived from torque, traction, and compatibility relations at the pulley–belt interfaces.

2.5.3 Time Integration Perspective

During numerical simulation, the state vector is advanced forward in time.

At each timestep Δt :

- The angular speeds ω_p and ω_s are updated according to their angular accelerations.

- The axial position s is updated using its current velocity $\dot{s}$.
- The axial velocity $\dot{s}$ is updated according to the axial acceleration.
- The belt transport speed v_b is updated according to its angular acceleration.

The angular and axial accelerations are determined from the governing equations derived in subsequent sections. Once the state vector has been updated, all other quantities in the model are computed directly from the current values of ω_p , ω_s , s , $\dot{s}$, and v_b .

Chapter 3

Derivation

3.1 Pulley Geometry

The conceptual overview introduced the CVT as two variable-radius pulleys connected by a single belt. The primary and secondary pulleys do not choose their radii independently: when the belt moves outward on one pulley, it must move inward on the other. The transmission ratio is therefore not a separate mechanism, but a consequence of where the belt sits on the two pulleys.

This section turns that idea into the geometric and kinematic relationships needed later in the model. The analysis uses the axial shift position s and the CVT axial direction defined in [Section 2.3.1](#). At this point, the question is not why the CVT shifts. That requires the mechanical actuation, contact, and drivetrain dynamics developed later. The question here is more basic:

if s , $\dot{s}$, and $\ddot{s}$ are known, what are the pulley radii,
and how are those radii moving?

The natural place to start is the shape of the pulleys themselves. A belt sitting in a V-groove has a direct connection between axial motion and radial position. Since the same belt connects both pulleys, the two pulley radii must also be related to each other. The goal of this section is to use those geometric facts to obtain the radius and ratio relationships needed before any forces are introduced.

Once the position-level geometry is clear, the same relationships can be viewed as time-varying quantities. If the shift coordinate moves, then the pulley radii move with it. The remaining kinematic task is therefore to differentiate the geometric relationships so that radius rates, radius accelerations, and ratio rate can be expressed consistently from the same foundation.

3.1.1 Shift Coordinate, Deadzone, and Primary Closure

The shift coordinate s was defined in [Section 2.3.1](#) as the axial displacement of the movable primary sheave. Since the primary is the driving pulley on the engine side of the CVT, this primary sheave motion is used as the reference motion for the ratio change.

The reference position is the fully open primary pulley,

$$s = 0.$$

In this position, the primary sheaves are farthest apart and the belt sits at its smallest primary radius. As s increases, the movable primary sheave moves toward the fixed sheave. This closes the primary pulley and moves the CVT toward upshift.

Two other positions complete the useful range of the coordinate. The first is the deadzone position s_{dz} . In the fully open configuration, the primary gap may be wider than the belt, so the movable sheave can travel a short distance before it actually begins to squeeze the belt. During this open region,

$$0 \leq s < s_{dz},$$

the primary sheave is moving, but the belt has not yet been forced outward. The primary radius therefore remains unchanged.

Once the deadzone is taken up,

$$s_{dz} \leq s,$$

the belt is seated against the sheave faces. Further closure of the primary V-groove now forces the belt outward to a larger radius.

The second position is the maximum shift position s_{max} . This is the largest possible primary closure. Physically, it corresponds to the end of the movable sheave travel: the pulley has closed as far as the hardware allows, so the two sheave components cannot move farther together. The modeled shift range is therefore

$$0 \leq s \leq s_{max}.$$

3.1.2 Primary Outer Radius as a Function of Shift

Since the shift coordinate s directly measures closure of the primary pulley, the first geometric relationship to establish is between primary closure and radial motion of the belt. Before the deadzone is taken up, the movable sheave can move without changing where the belt sits. Once the belt is seated between the sheave faces, further closure forces it outward.

This behavior follows from the belt's fixed cross-section. As assumed in ??, the belt has a fixed axial width and a fixed radial height. Its fixed width is what prevents it from remaining at the same radius as the sheaves close: once the gap becomes smaller than the belt, the belt must move outward along the conical faces.

Consider the instant at which the belt has just become seated, at $s = s_{dz}$. Let b_{in} denote the fixed width of the belt's inner base. At this instant, the sheave gap at the inner base is also b_{in} . Now let the movable primary sheave close by a further amount Δs . At the original radial position, the gap is then reduced to $b_{in} - \Delta s$. The belt cannot remain there with the same width, so it moves outward by Δr , as shown in [Figure 3.1](#).

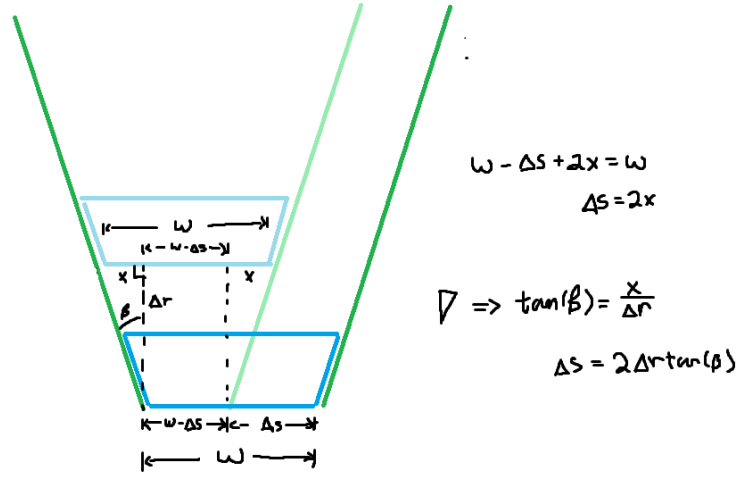


Figure 3.1: Primary V-groove geometry after the belt has become seated. A further closure Δs reduces the gap at the original belt position from b_{in} to $b_{in} - \Delta s$. As the belt moves outward by Δr , the angled sheave faces provide an additional axial space x on each side.

At the belt's new radial position, the two angled sheave faces provide an additional space x on either side. The belt still has the same width b_{in} , so the available gap must satisfy

$$b_{in} - \Delta s + 2x = b_{in}.$$

Thus,

$$\Delta s = 2x.$$

The small triangle beside either sheave face relates this side contribution to the radial rise. For the sheave half-angle β ,

$$\tan \beta = \frac{x}{\Delta r},$$

so that

$$x = \Delta r \tan \beta.$$

Substituting this result into the gap relation above gives

$$\Delta r = \frac{\Delta s}{2 \tan \beta}. \quad (3.1.1)$$

This is the basic wedge relation for the primary pulley: axial closure of the sheaves becomes radial motion of the belt. A smaller sheave angle produces more radial motion for the same axial closure, while a larger sheave angle produces less.

Taking the infinitesimal limit of Equation (3.1.1) yields the local geometric relationship between axial shift and belt radius,

$$\frac{dr}{ds} = \frac{1}{2 \tan \beta}. \quad (3.1.2)$$

Because the sheave face is straight, this derivative is constant, meaning that radial position varies linearly with axial displacement.

The radial change Δr is the same whether it is measured at the inner or outer surface of the belt, because the belt's radial height is fixed. The radii themselves differ by that fixed height. The radius used for the belt-path geometry is the *primary outer radius*, $r_{p,\text{outer}}$, measured to the outside surface of the belt. The corresponding inner radius is

$$r_{p,\text{inner}} = r_{p,\text{outer}} - h_b,$$

where h_b is the belt radial height. The effective torque radius is introduced later.

Let $r_{p,\text{outer},\text{min}}$ denote the primary outer radius at the fully open position. The deadzone and the V-groove relation can now be summarized in one radius map:

Primary Outer Radius	(3.1.3)
$r_{p,\text{outer}}(s) = \begin{cases} r_{p,\text{outer},\text{min}}, & 0 \leq s < s_{\text{dz}}, \\ r_{p,\text{outer},\text{min}} + \frac{s - s_{\text{dz}}}{2 \tan \beta}, & s_{\text{dz}} \leq s \leq s_{\text{max}}. \end{cases}$	

Before the belt is squeezed, the primary radius remains fixed. Once the deadzone has been taken up, each additional amount of primary closure moves the belt outward according to the same V-groove geometry.

3.1.3 Fixed Belt Length and Pulley Coupling

The primary-radius map gives the belt position on the driving pulley. The secondary radius is not chosen independently. The same belt connects both pulleys, so when the belt moves outward on the primary, its path must adjust on the secondary.

This coupling follows from two geometric assumptions. First, the belt length is treated as constant, as stated in ???. No matter where the belt sits on the two pulleys, its complete path around the CVT must therefore always have the same total length. Second, the idealized belt-path assumption in ??? describes how that path is measured. Within each pulley contact region, the belt follows a circular arc at a uniform radius, while the two sections between the pulleys are straight tangent spans. Together, these assumptions mean that any proposed pair of pulley radii defines a belt path with a particular length. The geometrically allowable pair is the one whose path length equals the fixed belt length.

For compactness, the radii in this subsection are written as r_p and r_s , with both measured to the same reference surface of the belt. In the present geometry model, these are the primary and secondary outer radii introduced above. The corresponding belt length L_b is referenced to that same outer surface.

With those radii fixed at a given instant, the assumed belt path is shown in [Figure 3.2](#). It is made up of an arc around the primary pulley, an arc around the secondary pulley, and two equal straight spans between them.

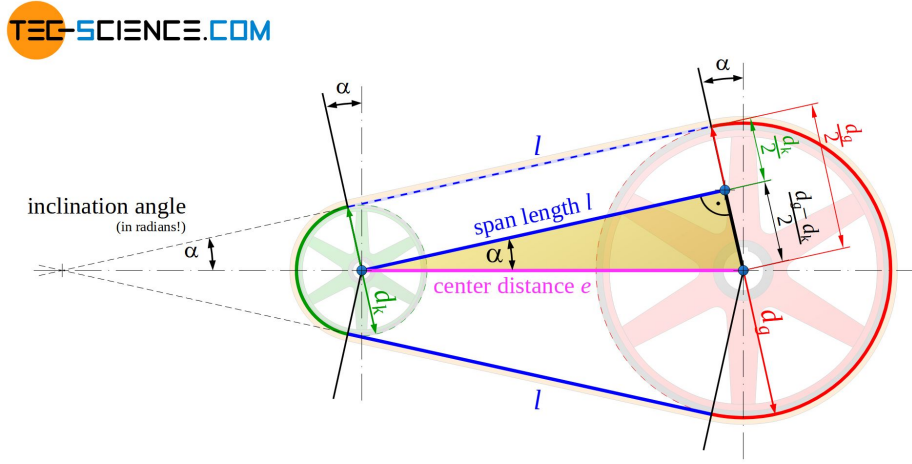


Figure 3.2: Idealized open-belt geometry for the two-pulley CVT. The belt follows circular contact arcs of radii r_p and r_s , connected by two straight tangent spans of length ℓ . The pulley centers are separated by the fixed distance C , while ϕ_p and ϕ_s denote the corresponding wrap angles.

The amount of wrap on each pulley depends on how the straight spans tilt between the two radii. Let λ denote the signed angle between the line of centers and either straight span, as shown in [Figure 3.2](#). The right-triangle geometry gives

$$\sin \lambda = \frac{r_s - r_p}{C}, \quad (3.1.4)$$

or equivalently,

$$\lambda = \sin^{-1} \left(\frac{r_s - r_p}{C} \right). \quad (3.1.5)$$

When the secondary radius is larger than the primary radius, $\lambda > 0$. The belt then wraps less than half a turn around the smaller primary pulley and more than half a turn around the larger secondary pulley. The resulting wrap angles are

$$\phi_p = \pi - 2\lambda, \quad (3.1.6)$$

$$\phi_s = \pi + 2\lambda. \quad (3.1.7)$$

If the primary becomes larger than the secondary, λ becomes negative. The same expressions then reverse the wrap distribution automatically.

The same triangle also gives the length of either straight span,

$$\ell = \sqrt{C^2 - (r_s - r_p)^2}. \quad (3.1.8)$$

The total geometric belt length is therefore the sum of the two contact arcs and the two straight spans,

$$L_b = r_p \phi_p + r_s \phi_s + 2\ell. \quad (3.1.9)$$

Substituting [Equations \(3.1.6\) to \(3.1.8\)](#) into [Equation \(3.1.9\)](#) gives

$$\begin{aligned} L_b &= r_p(\pi - 2\lambda) + r_s(\pi + 2\lambda) + 2\sqrt{C^2 - (r_s - r_p)^2} \\ &= \pi(r_p + r_s) + 2\lambda(r_s - r_p) + 2\sqrt{C^2 - (r_s - r_p)^2}. \end{aligned} \quad (3.1.10)$$

Finally, substituting [Equation \(3.1.5\)](#) gives the belt-length relation entirely in terms of the two radii and the center distance,

$$L_b = \pi(r_p + r_s) + 2(r_s - r_p) \sin^{-1}\left(\frac{r_s - r_p}{C}\right) + 2\sqrt{C^2 - (r_s - r_p)^2}. \quad (3.1.11)$$

This arc-and-tangent construction is commonly used in belt-drive geometry to relate pulley radii, wrap angles, and belt length; [Budynas and Nisbett \(2015\)](#) presents the same underlying construction for conventional belt drives.

[Equation \(3.1.11\)](#) couples the two pulley radii and the center-to-center distance through the fixed belt length. The primary radius is available from the shift coordinate, but the secondary radius and center-to-center distance are still unknown.

Neither quantity can be isolated directly from [Equation \(3.1.11\)](#), since each appears both outside and inside the inverse-sine and square-root terms. The remaining geometry must therefore be established from this implicit belt-length relation.

Remark (Simplified Belt-Length Relation)

The exact belt-length relation does not permit a closed-form solution for the unknown geometry. A common simplification, appropriate when the pulley-radius difference is small relative to the center distance, is to neglect the wrap-angle correction by taking

$$\lambda = \sin^{-1}\left(\frac{r_s - r_p}{C}\right) \approx 0.$$

Equation (3.1.11) then becomes

$$L_b \approx \pi(r_p + r_s) + 2\sqrt{C^2 - (r_s - r_p)^2},$$

which can be rearranged algebraically to obtain the unknown geometry in closed form. The present model retains the exact relation; the effect of this simplification is examined in Appendix A.

3.1.4 Secondary Radius from Belt-Length Compatibility

The two remaining quantities do not need to be found simultaneously. The center-to-center distance is fixed by the assembled CVT, whereas the secondary radius changes as the sheaves shift. Thus, before using the belt-length relation to follow the changing secondary radius, the fixed shaft spacing can be established once from any configuration in which both pulley radii are known.

A natural choice is the configuration at the beginning of primary-sheave travel. The primary pulley is fully open and the secondary pulley is fully closed, so the belt sits at the bottom of the primary groove and at the top of the secondary groove. Its two radii are therefore known directly:

$$r_p = r_{p,\text{outer},\text{min}}, \quad r_s = r_{s,\text{outer},\text{max}}.$$

With this reference configuration and the specified belt length, the implicit belt-length relation contains only the fixed center-to-center distance (C) as an unknown.

Reference center-to-center distance Substituting the known reference radii into the belt-length relation leaves one unknown: the center-to-center distance C . Since C appears both directly and inside the inverse-sine and square-root terms, it cannot be rearranged into an explicit expression. Instead, the belt-length condition is written as a residual:

Belt-Length Compatibility Residual

(3.1.12)

$$\mathcal{R}_{\text{belt}}(r_p, r_s, C) = \pi(r_p + r_s) + 2(r_s - r_p) \sin^{-1}\left(\frac{r_s - r_p}{C}\right) + 2\sqrt{C^2 - (r_s - r_p)^2} - L_b.$$

For any proposed geometry, this residual is the difference between the belt path required by that geometry and the available belt length. A positive value means that the required path is too long for the belt, while a negative value means that it is too short. At the reference radii, the assembled center-to-center distance is therefore the value of C for which

$$\mathcal{R}_{\text{belt}}(r_{p,\text{outer},\text{min}}, r_{s,\text{outer},\text{max}}, C) = 0. \quad (3.1.13)$$

This is a one-dimensional nonlinear root-finding problem. The center distance is found numerically over its geometrically admissible range until the belt-length residual vanishes. Details of the numerical procedure, including the search interval and convergence criterion, are given in ???. Because this calculation uses only fixed belt and sheave geometry, it is performed once during geometry initialization. The resulting value of C then remains fixed throughout the simulation.

Secondary radius during shift With the center-to-center distance established, the original problem has only one remaining unknown. At any shift position, Equation (3.1.3) gives $r_{p,\text{outer}}(s)$, and the secondary outer radius is the value that makes the same fixed belt fit around both pulleys:

Secondary Outer Radius	(3.1.14)
$\mathcal{R}_{\text{belt}}(r_{p,\text{outer}}(s), r_{s,\text{outer}}(s), C) = 0.$	

For a given shift position, Equation (3.1.14) is again a one-dimensional nonlinear root-finding problem, now in $r_{s,\text{outer}}(s)$. The search is restricted to the physical range of secondary pulley radii, and the admissible root gives the belt position on the secondary pulley. The same numerical procedure described in ??? is used whenever the system equations are evaluated as the shift coordinate changes.

The two pulley radii are now available from the shift coordinate: $r_{p,\text{outer}}(s)$ follows directly from the primary V-groove geometry, and $r_{s,\text{outer}}(s)$ follows from fixed belt-length compatibility. The remaining belt-path quantities can then be evaluated from the current geometry.

3.1.5 Wrap Angles as Functions of Shift

The wrap angles on the primary and secondary pulleys vary as the pulley radii change. Using the geometric relations from Section 3.1.3, the tangency angle becomes

$$\lambda(s) = \sin^{-1} \left(\frac{r_{s,\text{outer}}(s) - r_{p,\text{outer}}(s)}{C} \right). \quad (3.1.15)$$

Substitution into the wrap-angle definitions yields

$$\phi_p(s) = \pi - 2 \sin^{-1} \left(\frac{r_{s,\text{outer}}(s) - r_{p,\text{outer}}(s)}{C} \right), \quad (3.1.16)$$

$$\phi_s(s) = \pi + 2 \sin^{-1} \left(\frac{r_{s,\text{outer}}(s) - r_{p,\text{outer}}(s)}{C} \right). \quad (3.1.17)$$

3.1.6 Effective Torque Radius

All geometric relations derived thus far use the outer surface of the belt as the reference radius. This simplifies the belt-length formulation and pulley geometry.

Torque transmission, however, occurs through the belt cross-section. The appropriate moment arm for torque is therefore located approximately at the mid-height of the belt, as illustrated in **Figure 3.3**.

The effective torque radius for each pulley is defined as

$$r_{p,\text{eff}} = r_{p,\text{outer}} - \frac{h_b}{2}, \quad (3.1.18)$$

$$r_{s,\text{eff}} = r_{s,\text{outer}} - \frac{h_b}{2}. \quad (3.1.19)$$

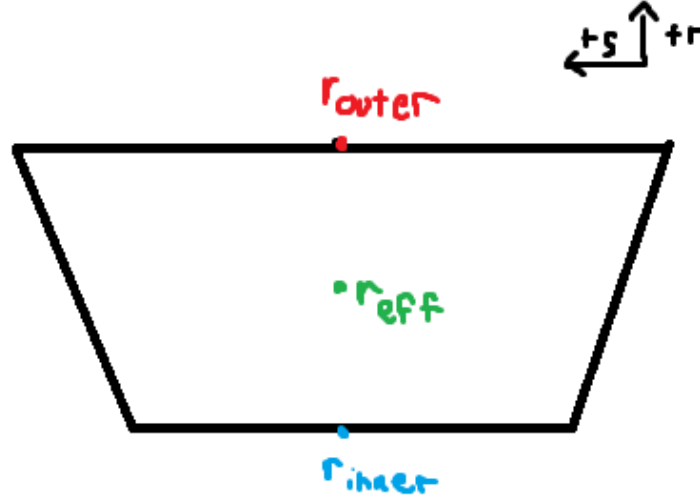


Figure 3.3: Belt cross-section showing the outer radius r_{outer} , inner radius r_{inner} , and effective torque radius r_{eff} located at the belt mid-height. The effective radius is used for all torque and power transmission calculations.

3.1.7 CVT Ratio Definition

The instantaneous transmission ratio is determined purely by pulley geometry. It is defined as the ratio of secondary to primary effective radii:

CVT Ratio	(3.1.20)
$R(s) = \frac{r_{s,\text{eff}}(s)}{r_{p,\text{eff}}(s)}.$	

Because both effective radii are functions of the shift coordinate s , the transmission ratio is likewise a function of s alone.

As the primary sheaves close, $r_{p,\text{eff}}(s)$ increases. By belt-length compatibility, the secondary radius decreases. Consequently, the ratio $R(s)$ decreases with increasing s .

Throughout this document, *low ratio* and *high ratio* are named by speed-reduction behavior, not by the numerical magnitude of R . Using the no-slip relation $\omega_p = R\omega_s$, larger R means stronger reduction (primary faster than secondary), which we call *low ratio*; smaller R is the opposite, which we call *high ratio*.

Thus:

- Small s (minimum primary radius) corresponds to low ratio.
- Large s (maximum primary radius) corresponds to high ratio.

The CVT ratio is therefore a purely geometric quantity determined by the axial shift position.

3.1.8 Ratio Rate of Change

The CVT ratio is not only a function of shift position, but also changes in time whenever the sheaves are moving. This time variation matters because a changing ratio introduces additional kinematic coupling between the primary and secondary rotations. In other words, it is not sufficient to know the instantaneous ratio $R(s)$; the model also requires how quickly the ratio is changing.

This section derives an explicit expression for $\dot{R}$ in terms of the shift velocity $\dot{s}$ and geometric derivatives.

Start from the Ratio Definition

The ratio is defined by the effective radii as

$$R(s) = \frac{r_{s,\text{eff}}(s)}{r_{p,\text{eff}}(s)}. \quad (3.1.21)$$

Because R depends on time only through $s(t)$, the chain rule gives

$$\dot{R} = \frac{dR}{ds} \dot{s}. \quad (3.1.22)$$

Thus, the objective is to compute dR/ds .

Differentiate R with Respect to s

Differentiating Equation (3.1.21) with respect to s (quotient rule) gives

$$\frac{dR}{ds} = \frac{d}{ds} \left(\frac{r_{s,\text{eff}}}{r_{p,\text{eff}}} \right) = \frac{\left(\frac{dr_{s,\text{eff}}}{ds} \right) r_{p,\text{eff}} - r_{s,\text{eff}} \left(\frac{dr_{p,\text{eff}}}{ds} \right)}{r_{p,\text{eff}}^2}. \quad (3.1.23)$$

Rearranging into a form that exposes the required components:

$$\frac{dR}{ds} = \frac{1}{r_{p,\text{eff}}} \frac{dr_{s,\text{eff}}}{ds} - \frac{r_{s,\text{eff}}}{r_{p,\text{eff}}^2} \frac{dr_{p,\text{eff}}}{ds}. \quad (3.1.24)$$

At this point, the remaining task is to express the two derivatives $dr_{p,\text{eff}}/ds$ and $dr_{s,\text{eff}}/ds$ in computable form.

Primary Radius Derivative

The primary radius derivative follows directly from the sheave geometry, since the primary radius is prescribed explicitly as a function of shift. From the piecewise primary radius model [Equation \(3.1.3\)](#), the primary outer radius satisfies

$$r_{p,\text{outer}}(s) = \begin{cases} r_{p,\text{outer},\text{min}}, & 0 \leq s < s_{\text{dz}}, \\ r_{p,\text{outer},\text{min}} + \frac{s - s_{\text{dz}}}{2 \tan \beta}, & s_{\text{dz}} \leq s \leq s_{\text{max}}. \end{cases}$$

Differentiating with respect to s gives

Primary Radius Derivative (3.1.25) $\frac{dr_p}{ds} = \frac{dr_{p,\text{outer}}}{ds} = \begin{cases} 0, & 0 \leq s < s_{\text{dz}}, \\ \frac{1}{2 \tan \beta}, & s_{\text{dz}} \leq s \leq s_{\text{max}}. \end{cases}$
--

Because $r_{p,\text{eff}} = r_{p,\text{outer}} - h_b/2$ and h_b is constant, the same derivative applies:

$$\frac{dr_{p,\text{eff}}}{ds} = \frac{dr_p}{ds}. \quad (3.1.26)$$

Remark (At the Travel Limit)

If the model clamps s at the physical limit s_{max} , then $r_{p,\text{outer}}$ (and thus $r_{p,\text{eff}}$) is constant beyond this point and the derivative is zero for $s > s_{\text{max}}$. In this document we restrict to the admissible domain $0 \leq s \leq s_{\text{max}}$.

Secondary Radius Derivative

Unlike the primary radius, the secondary radius is not prescribed explicitly as a function of shift. Instead, it is determined implicitly by the belt-length compatibility condition derived in [Section 3.1.3](#). Thus, the secondary radius derivative must be obtained by differentiating the constraint itself.

The belt-length constraint is written as

$$f(r_p, r_s, C) = 0, \quad (3.1.27)$$

where $f(\cdot)$ is defined in ?? and C is constant.

Since both $r_p = r_p(s)$ and $r_s = r_s(s)$ depend on the shift coordinate s , differentiating [Equation \(3.1.27\)](#) with respect to s gives, by the multivariable chain rule,

$$\frac{\partial f}{\partial r_p} \frac{dr_p}{ds} + \frac{\partial f}{\partial r_s} \frac{dr_s}{ds} = 0. \quad (3.1.28)$$

Solving Equation (3.1.28) for the secondary radius derivative yields

$$\frac{dr_s}{ds} = - \frac{\frac{\partial f}{\partial r_p} \frac{dr_p}{ds}}{\frac{\partial f}{\partial r_s}}. \quad (3.1.29)$$

Because the effective secondary radius differs from the outer radius only by the constant belt offset $h_b/2$, the same derivative applies to the effective radius:

$$\frac{dr_{s,\text{eff}}}{ds} = \frac{dr_s}{ds}. \quad (3.1.30)$$

Equation (3.1.29) shows that the secondary radial motion is not independent, but is instead determined by the belt-length constraint and the primary radial motion.

At this point, the remaining task is to evaluate the two belt-constraint sensitivities $\partial f/\partial r_p$ and $\partial f/\partial r_s$, which appear in Equation (3.1.29). The following subsections derive these quantities explicitly for the belt-length function defined in ??.

Partial Derivatives of the Belt Constraint

Recall the belt-length constraint written in root form as

$$f(r_p, r_s, C) = \pi(r_p + r_s) + 2(r_s - r_p) \sin^{-1}\left(\frac{r_s - r_p}{C}\right) + 2\sqrt{C^2 - (r_s - r_p)^2} - L_b = 0. \quad (3.1.31)$$

We now compute the two partial derivatives required in Equation (3.1.29), differentiating term-by-term and applying the product rule directly to the inverse-sine term.

Product rule for the inverse-sine factor Consider the factor

$$(r_s - r_p) \sin^{-1}\left(\frac{r_s - r_p}{C}\right).$$

Differentiating with respect to r_p (product rule) gives

$$\frac{\partial}{\partial r_p} \left[(r_s - r_p) \sin^{-1}\left(\frac{r_s - r_p}{C}\right) \right] = \underbrace{\frac{\partial}{\partial r_p} (r_s - r_p)}_{(1)} \sin^{-1}\left(\frac{r_s - r_p}{C}\right) + (r_s - r_p) \underbrace{\frac{\partial}{\partial r_p} \sin^{-1}\left(\frac{r_s - r_p}{C}\right)}_{(2)}. \quad (3.1.32)$$

We therefore compute the two sub-derivatives.

Derivative (1)

$$\frac{\partial}{\partial r_p} (r_s - r_p) = -1. \quad (3.1.33)$$

Derivative (2) Using the chain rule,

$$\frac{d}{dx} \sin^{-1}(x) = \frac{1}{\sqrt{1-x^2}},$$

let

$$u = \frac{r_s - r_p}{C}.$$

Then

$$\frac{\partial u}{\partial r_p} = -\frac{1}{C}.$$

Therefore,

$$\frac{\partial}{\partial r_p} \sin^{-1}\left(\frac{r_s - r_p}{C}\right) = \frac{1}{\sqrt{1-u^2}} \left(-\frac{1}{C}\right). \quad (3.1.34)$$

Now simplify the denominator:

$$\sqrt{1-u^2} = \sqrt{1 - \left(\frac{r_s - r_p}{C}\right)^2} = \frac{\sqrt{C^2 - (r_s - r_p)^2}}{C}.$$

Substituting into [Equation \(3.1.34\)](#) yields

$$\frac{\partial}{\partial r_p} \sin^{-1}\left(\frac{r_s - r_p}{C}\right) = -\frac{1}{\sqrt{C^2 - (r_s - r_p)^2}}. \quad (3.1.35)$$

Substitute into the product rule Substituting [Equation \(3.1.33\)](#) and [Equation \(3.1.35\)](#) into [Equation \(3.1.32\)](#) gives

$$\begin{aligned} \frac{\partial}{\partial r_p} \left[(r_s - r_p) \sin^{-1}\left(\frac{r_s - r_p}{C}\right) \right] &= (-1) \sin^{-1}\left(\frac{r_s - r_p}{C}\right) + (r_s - r_p) \left(-\frac{1}{\sqrt{C^2 - (r_s - r_p)^2}} \right) \\ &= -\sin^{-1}\left(\frac{r_s - r_p}{C}\right) - \frac{r_s - r_p}{\sqrt{C^2 - (r_s - r_p)^2}}. \end{aligned} \quad (3.1.36)$$

Derivative of the square-root term For the straight-span contribution,

$$2\sqrt{C^2 - (r_s - r_p)^2},$$

we apply the chain rule:

$$\frac{\partial}{\partial r_p} \left[2\sqrt{C^2 - (r_s - r_p)^2} \right] = \frac{2(r_s - r_p)}{\sqrt{C^2 - (r_s - r_p)^2}}. \quad (3.1.37)$$

Assemble $\partial f/\partial r_p$ Differentiating Equation (3.1.31) term-by-term gives

$$\begin{aligned}\frac{\partial f}{\partial r_p} &= \pi + 2 \left(-\sin^{-1} \left(\frac{r_s - r_p}{C} \right) - \frac{r_s - r_p}{\sqrt{C^2 - (r_s - r_p)^2}} \right) + \frac{2(r_s - r_p)}{\sqrt{C^2 - (r_s - r_p)^2}} \\ &= \pi - 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right).\end{aligned}\tag{3.1.38}$$

The square-root contributions cancel exactly.

Derivative with respect to r_s The same procedure yields

$$\frac{\partial}{\partial r_s} \left[(r_s - r_p) \sin^{-1} \left(\frac{r_s - r_p}{C} \right) \right] = \sin^{-1} \left(\frac{r_s - r_p}{C} \right) + \frac{r_s - r_p}{\sqrt{C^2 - (r_s - r_p)^2}},\tag{3.1.39}$$

and

$$\frac{\partial}{\partial r_s} \left[2\sqrt{C^2 - (r_s - r_p)^2} \right] = -\frac{2(r_s - r_p)}{\sqrt{C^2 - (r_s - r_p)^2}}.\tag{3.1.40}$$

Assembling terms gives

$$\begin{aligned}\frac{\partial f}{\partial r_s} &= \pi + 2 \left(\sin^{-1} \left(\frac{r_s - r_p}{C} \right) + \frac{r_s - r_p}{\sqrt{C^2 - (r_s - r_p)^2}} \right) - \frac{2(r_s - r_p)}{\sqrt{C^2 - (r_s - r_p)^2}} \\ &= \pi + 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right).\end{aligned}\tag{3.1.41}$$

Summary of Belt Constraint Partial Derivatives From the derivations above, the partial derivatives of the belt-length constraint Equation (3.1.31) are

$$\frac{\partial f}{\partial r_p} = \pi - 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right),\tag{3.1.42}$$

$$\frac{\partial f}{\partial r_s} = \pi + 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right).\tag{3.1.43}$$

These expressions are globally valid under the geometric definition of λ given in Equation (3.1.5) and require no piecewise case distinction.

Final Expression for the Secondary Radius Derivative

Equation (3.1.29) expresses the secondary radius derivative in terms of the belt-constraint partial derivatives and the primary radius derivative:

$$\frac{dr_s}{ds} = -\frac{\frac{\partial f}{\partial r_p} \frac{dr_p}{ds}}{\frac{\partial f}{\partial r_s}}. \quad (3.1.44)$$

From Equation (3.1.25), the partial derivatives of the belt-length constraint ?? are

$$\frac{\partial f}{\partial r_p} = \pi - 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right), \quad (3.1.45)$$

$$\frac{\partial f}{\partial r_s} = \pi + 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right). \quad (3.1.46)$$

Substituting Equation (3.1.45) and Equation (3.1.46) into Equation (3.1.44) gives

$$\frac{dr_s}{ds} = -\frac{\pi - 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right)}{\pi + 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right)} \frac{dr_p}{ds}. \quad (3.1.47)$$

Finally, substituting the piecewise primary radius derivative Equation (3.1.25) yields

Secondary Radius Derivative $\frac{dr_s}{ds} = \begin{cases} 0, & 0 \leq s < s_{dz}, \\ -\frac{1}{2 \tan \beta} \frac{\pi - 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right)}{\pi + 2 \sin^{-1} \left(\frac{r_s - r_p}{C} \right)}, & s_{dz} \leq s \leq s_{\max}. \end{cases}$ (3.1.48)

Because $r_{s,\text{eff}} = r_s - h_b/2$ with h_b constant, the same expression applies to the effective secondary radius derivative:

$$\frac{dr_{s,\text{eff}}}{ds} = \frac{dr_s}{ds}. \quad (3.1.49)$$

Final Expression for dR/ds and $\dot{R}$

From Equation (3.1.24), the ratio derivative is

$$\frac{dR}{ds} = \frac{1}{r_{p,\text{eff}}} \frac{dr_{s,\text{eff}}}{ds} - \frac{r_{s,\text{eff}}}{r_{p,\text{eff}}^2} \frac{dr_{p,\text{eff}}}{ds}. \quad (3.1.50)$$

Using Equation (3.1.26) and Equation (3.1.49), this becomes

$$\frac{dR}{ds} = \frac{1}{r_{p,\text{eff}}} \frac{dr_s}{ds} - \frac{r_{s,\text{eff}}}{r_{p,\text{eff}}^2} \frac{dr_p}{ds}. \quad (3.1.51)$$

Substituting Equation (3.1.47) into Equation (3.1.51) gives

$$\frac{dR}{ds} = \left[-\frac{1}{r_{p,\text{eff}}} \frac{\pi - 2 \sin^{-1}\left(\frac{r_s - r_p}{C}\right)}{\pi + 2 \sin^{-1}\left(\frac{r_s - r_p}{C}\right)} - \frac{r_{s,\text{eff}}}{r_{p,\text{eff}}^2} \right] \frac{dr_p}{ds}. \quad (3.1.52)$$

Finally, substituting the piecewise primary derivative Equation (3.1.25) yields the fully expanded result

$$\frac{dR}{ds} = \begin{cases} 0, & 0 \leq s < s_{\text{dz}}, \\ \frac{1}{2 \tan \beta} \left[-\frac{1}{r_{p,\text{eff}}} \frac{\pi - 2 \sin^{-1}\left(\frac{r_s - r_p}{C}\right)}{\pi + 2 \sin^{-1}\left(\frac{r_s - r_p}{C}\right)} - \frac{r_{s,\text{eff}}}{r_{p,\text{eff}}^2} \right], & s_{\text{dz}} \leq s \leq s_{\text{max}}. \end{cases} \quad (3.1.53)$$

Using the chain rule Equation (3.1.22), $\dot{R} = (dR/ds)\dot{s}$. Substituting Equation (3.1.53) and rearranging gives

Rate of Change of Transmission Ratio	(3.1.54)
$\dot{R} = \begin{cases} 0, & 0 \leq s < s_{\text{dz}}, \\ -\frac{\dot{s}}{2 \tan \beta r_{p,\text{eff}}} \left[\frac{\pi - 2 \sin^{-1}\left(\frac{r_s - r_p}{C}\right)}{\pi + 2 \sin^{-1}\left(\frac{r_s - r_p}{C}\right)} + \frac{r_{s,\text{eff}}}{r_{p,\text{eff}}} \right], & s_{\text{dz}} \leq s \leq s_{\text{max}}. \end{cases}$	

3.1.9 Section Summary and Forward Connection

This section established the complete *geometric foundation* of the CVT model. The development was intentionally kinematic: the objective was to derive a closed, computable mapping from axial shift to pulley geometry and transmission ratio, without introducing force balance, slip behavior, or torque relations.

At a high level, the geometry defines the chain

$$s(t) \longrightarrow r_{p,\text{eff}}(s), r_{s,\text{eff}}(s) \longrightarrow R(s) \longrightarrow \dot{R}(s, \dot{s}),$$

with each intermediate relationship derived explicitly from pulley and belt geometry.

Key Results Established The following geometric components are now defined and ready for use in subsequent modeling:

1. **Primary radius law.** Equation (3.1.3) provides the piecewise relationship between axial shift s and primary outer radius, including deadzone behavior and cone-angle dependence.
2. **Belt-length compatibility constraint.** ?? enforces constant belt length and defines the implicit, nonlinear coupling between r_p , r_s , and the center distance C .
3. **Center distance determination.** ?? fixes the assembled center-to-center distance C by evaluating the belt constraint at a known geometric configuration. This solve is performed once during initialization.
4. **Secondary radius as a function of shift.** Section 3.1.4 defines $r_s(s)$ implicitly by solving the belt constraint at each shift position, producing the required redistribution of belt radius between pulleys.
5. **Wrap angles as functions of shift.** Section 3.1.5 defines the wrap angles $\phi_p(s)$ and $\phi_s(s)$ follow directly from the tangency geometry and are available for later contact, work, and belt-distribution calculations.
6. **Effective torque radii.** Section 3.1.6 corrects outer radii to effective radii using belt thickness, ensuring subsequent torque relations use an appropriate moment arm.
7. **Ratio and ratio rate.** Equation (3.1.20) defines the geometric ratio $R(s)$, and Section 3.1.8 provides $\frac{dR}{ds}$ and $\dot{R}$ via Equation (3.1.53) and Equation (3.1.54), including the deadzone condition where R is constant.

Structural Role in the Full Model These results form the geometric backbone of the CVT simulation. All subsequent sections treat the relationships derived here as fixed mappings. In particular, later torque and force models will use $r_{p,\text{eff}}(s)$ and $r_{s,\text{eff}}(s)$ as inputs, and shifting kinematics will use $R(s)$ and $\dot{R}(s, \dot{s})$ to relate primary and secondary motion during ratio change.

Several key properties are now clear: (i) the geometric coupling is inherently nonlinear (through the belt-length constraint), (ii) the deadzone is explicitly represented, and (iii) within the admissible travel range the mappings are differentiable and suitable for continuous-time simulation.

Transition to Dynamics With the geometry fully specified, the next objective is to determine how the shift coordinate evolves in time. Subsequent sections introduce axial force generation (from pulley mechanisms and belt interaction) to determine $\dot{s}$ and $\ddot{s}$. Once $\dot{s}$ is known, the ratio-rate expression Equation (3.1.54) provides the corresponding ratio evolution and the required kinematic coupling between rotating components during shifting.

3.2 Pulley Axial Force Models

The geometric relations developed in the previous section define how the transmission ratio varies with axial shift. What remains is to determine *why* the shift coordinate $s(t)$ changes in time.

Axial motion of the sheaves is driven by clamping forces generated within the primary and secondary assemblies. On the primary side, centrifugal flyweights and springs produce an inward axial force that tends to close the sheaves and increase radius. On the secondary side, torque reaction and spring preload generate an opposing axial force.

The evolution of the shift coordinate is governed by the net axial force acting on the movable sheave assembly. Applying Newton's second law in the axial direction (**Theory 1 (Newton's Second Law (Translation))**) gives

$$m \ddot{s} = F_{p,ax} - F_{s,ax}, \quad (3.2.1)$$

where $F_{p,ax}$ and $F_{s,ax}$ denote the axial forces generated by the primary and secondary mechanisms, respectively, and m is the effective axial inertia of the moving components.

The purpose of this section is to derive expressions for $F_{p,ax}$ and $F_{s,ax}$ as functions of the current system state. Once these force models are established, the shift acceleration $\ddot{s}$ follows directly, completing the dynamic description of axial motion.

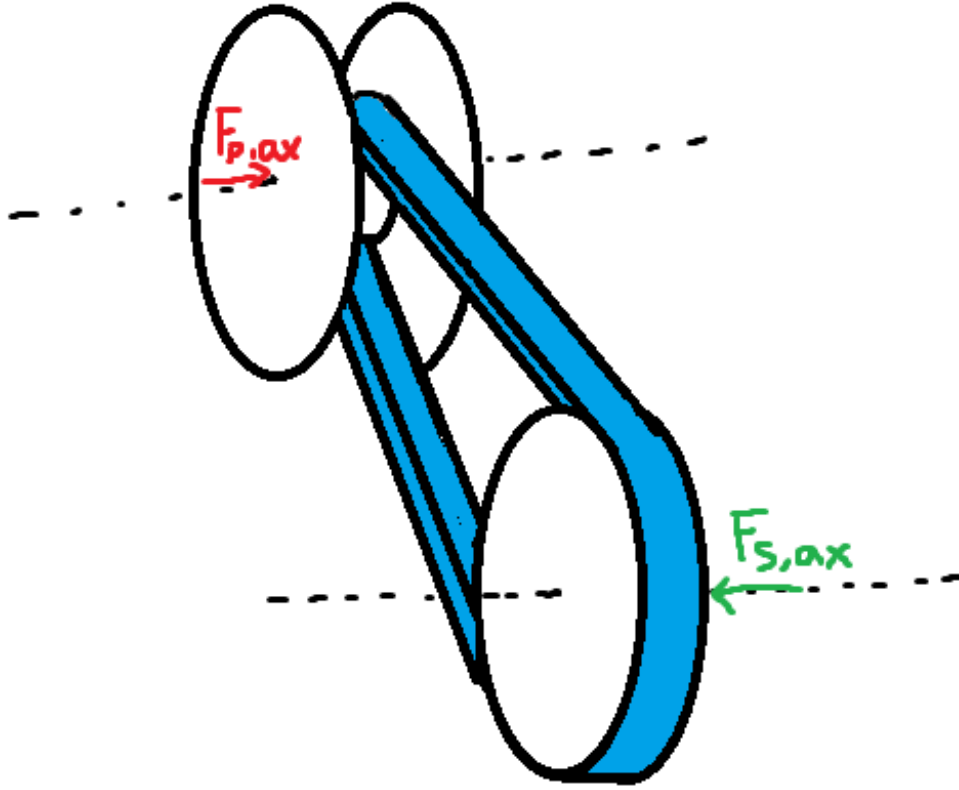


Figure 3.4: Axial force balance governing sheave motion. Primary and secondary mechanisms generate opposing axial forces. The net force determines the shift acceleration $\ddot{s}$.

Although the specific actuator mechanisms modeled here correspond to a flyweight-driven primary and a torque-reactive helix secondary, the formulation is modular: any actuator model may be substituted provided it returns the net axial force as a function of state.

3.2.1 Ramp Geometry Parameterization

Both pulley actuators redirect forces through inclined contact surfaces. As the shift coordinate s evolves, mechanical elements slide along these surfaces, converting radial or circumferential forces into axial clamping force.

To keep the formulation general and modular, the ramp geometries are parameterized directly as functions of the axial shift coordinate s . Any actuator profile may therefore be substituted provided it supplies the appropriate geometric mapping and derivative.

Primary Ramp Geometry (Axial-to-Radial Mapping) On the primary pulley, centrifugal force acting on the flyweights is redirected into axial closing force through a ramp surface (see [Figure 3.5](#)). As the movable sheave translates axially, the flyweight slides along this ramp.

We represent the ramp by an axial-to-radial profile

$$r_f = r_f(s), \quad (3.2.2)$$

where $r_f(s)$ is the effective flyweight radius.

An incremental axial displacement ds produces a radial displacement dr_f . The local slope of the ramp is therefore dr_f/ds . The instantaneous primary ramp angle is denoted by $\alpha_p(s)$ and is defined with respect to the axial direction as

$$\tan \alpha_p(s) = \frac{dr_f}{ds}, \quad \alpha_p(s) = \tan^{-1} \left(\frac{dr_f}{ds} \right). \quad (3.2.3)$$

This definition follows directly from the geometry of the sliding motion: a steeper ramp (larger dr_f/ds) produces greater radial change per unit axial travel and therefore greater axial gain when radial force is redirected through the surface.

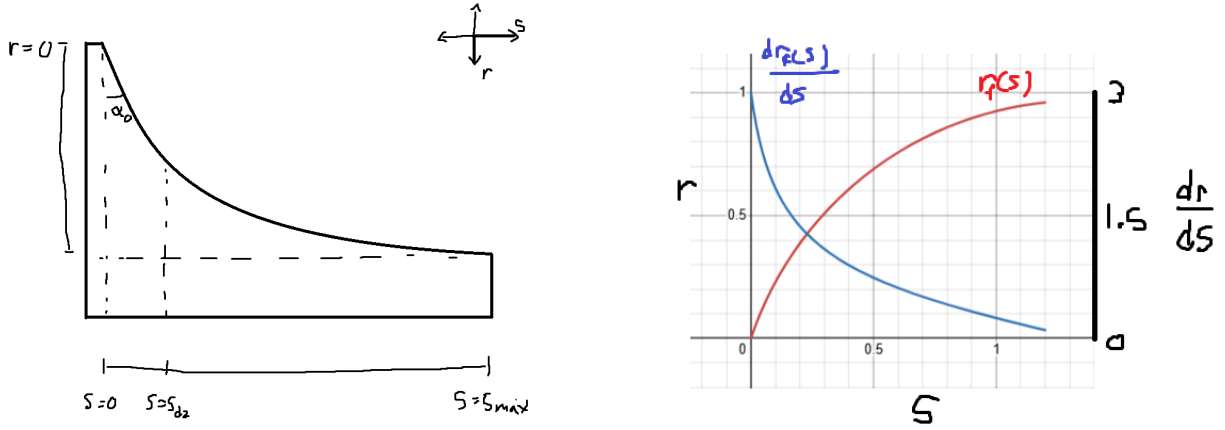


Figure 3.5: Primary ramp geometry. **Left:** As axial displacement s increases, the flyweight slides along the ramp, producing radial change dr_f . The instantaneous ramp angle satisfies $\tan \alpha_p = dr_f/ds$. **Right:** Example profiles of $r_f(s)$ and its slope dr_f/ds .

Primary Admissibility Conditions In order to be a valid primary ramp profile $r_f(s)$, it must satisfy:

1. $r_f(s) \in C^1([0, s_{\max}])$ (continuously differentiable),
2. $\frac{dr_f}{ds} \geq 0$ over $[0, s_{\max}]$,
3. $\frac{dr_f}{ds}$ is finite over $[0, s_{\max}]$.

Condition (1) ensures the ramp angle $\alpha_p(s)$ is well-defined and continuous. Condition (2) guarantees that increasing axial displacement does not reduce flyweight radius. Condition (3) ensures the ramp angle remains strictly below $\pi/2$ and the axial gain $\tan \alpha_p$ remains finite.

Secondary Helix Geometry (Axial-to-Rotation Mapping) On the secondary pulley, axial travel produces relative rotation of a helical ramp mechanism, loading a torsional spring and generating torque-reactive clamping (see [Figure 3.6](#)).

We parameterize this kinematically as

$$\theta_s = \theta_s(s), \quad (3.2.4)$$

where $\theta_s(s)$ is the helix-induced rotation.

An incremental rotation $d\theta_s$ corresponds to a circumferential displacement $r_h d\theta_s$ along a cylindrical surface of effective radius r_h . The instantaneous secondary helix angle is denoted by $\alpha_s(s)$ and is defined from the local slope of the ramp surface:

$$\tan \alpha_s = \frac{\text{axial rise}}{\text{circumferential run}} = \frac{ds}{r_h d\theta_s}.$$

Rewriting in differential form gives

$$\tan \alpha_s(s) = \frac{1}{r_h \frac{d\theta_s}{ds}}. \quad (3.2.5)$$

Thus, a shallower helix (smaller α_s) produces greater rotation per unit axial travel, while a steeper helix produces less rotation. This inverse relationship arises naturally from the geometry of motion on a cylindrical surface.

Remark (Contrast with Primary Ramp)

The primary ramp behaves like a simple wedge: radial displacement is directly proportional to axial travel, so the ramp angle is naturally defined by $\tan \alpha_p = dr_f/ds$.

The secondary mechanism instead behaves like a power screw. Axial motion is produced through rotation around a cylindrical surface, so the relevant geometric ratio is how much rotation occurs per unit axial travel. This leads to the slope definition $ds/(r_h d\theta_s)$ and the inverse relationship in [Equation \(3.2.5\)](#).

In short, the primary redirects force through a wedge, while the secondary converts torque through a screw-like helix. The difference is purely geometric and reflects the distinct mechanisms by which axial motion is generated.

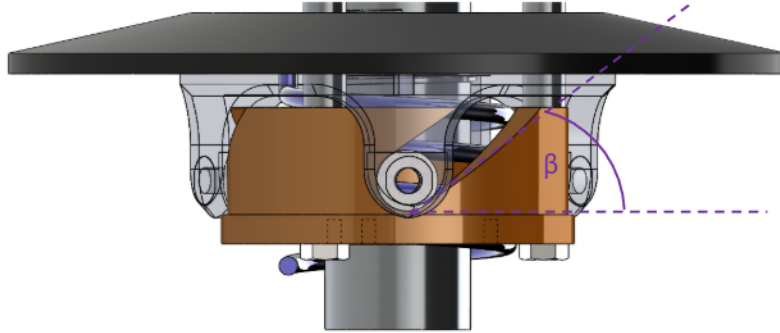


Figure 3.6: Secondary helix geometry. Axial travel s induces rotation $\theta_s(s)$ around a cylindrical surface of radius r_h . The instantaneous helix angle satisfies $\tan \alpha_s = ds/(r_h d\theta_s)$.

Secondary Admissibility Conditions The helix rotation mapping $\theta_s(s)$ must satisfy:

1. $\theta_s(s) \in C^1([0, s_{\max}])$ (continuously differentiable),
2. $\frac{d\theta_s}{ds} \geq 0$ over $[0, s_{\max}]$,
3. $\frac{d\theta_s}{ds}$ is finite over $[0, s_{\max}]$.

Condition (1) ensures the torque-to-axial conversion remains continuous. Condition (2) guarantees that increasing axial displacement increases rotation. Condition (3) ensures the effective helix angle remains strictly below $\pi/2$ and the geometric gain remains finite.

Remark (Piecewise Profiles in Practice)

The C^1 requirement above is sufficient for all derivations in this document. In practice, piecewise C^1 profiles (continuous everywhere, continuously differentiable except at finitely many junction points where left and right derivatives exist) are also admissible for numerical simulation. At junction points, one-sided derivatives provide the required slope values, and the resulting force discontinuities pose no difficulty for standard ODE solvers. However, large slope discontinuities can introduce local stiffness into the system: the abrupt change in force gradients may require adaptive solvers to reduce the timestep significantly near the junction, degrading computational efficiency. In extreme cases, explicit integrators may struggle to maintain stability without impractically small step sizes, and implicit or stiff-aware solvers may be preferable.

Derivations for common ramp and helix profiles are provided in Appendix B.

3.2.2 Primary Axial Force Model

The primary axial clamping force arises from the competition between centrifugal loading of the flyweights and the restoring force of the primary compression spring.

As shown in Figure 3.7, each flyweight of mass m_f rotates with angular speed ω_p at an instantaneous radius $r_{f,0} + r_f(s)$, where $r_{f,0}$ is the flyweight radius in the reference configuration $s = 0$ and $r_f(s)$ is the additional radial displacement induced by the ramp. The resulting outward centrifugal force is redirected by the ramp geometry described in Section 3.2.1 into an axial closing force on the movable primary sheave.

Opposing this motion is the primary compression spring, characterized by stiffness k_p and preload $x_{p,0}$. As the sheaves close (s increases), the spring compression increases, producing a larger restoring force that resists further closure.

The resulting primary axial force is therefore the ramp-redirectioned centrifugal contribution minus the spring force. This quantity, denoted $F_{p,ax}(s, \omega_p)$, provides the primary-side contribution to the generalized axial force used in the shift equation of motion.

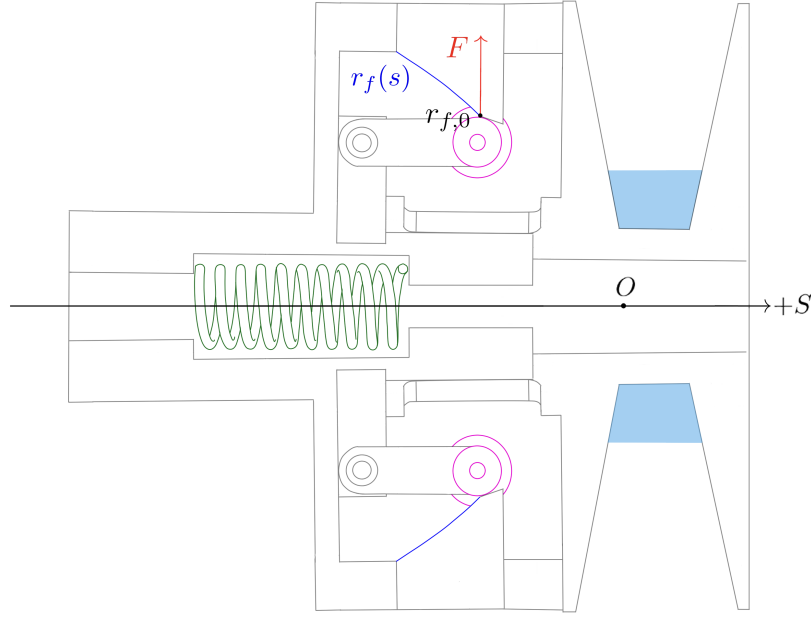


Figure 3.7: Primary CVT axial-force mechanism. Each flyweight of mass m_f rotates at angular speed ω_p and experiences an outward centrifugal force at total radius $r_{f,0} + r_f(s)$. The ramp geometry redirects this radial loading into an axial closing force on the movable primary sheave in the $+s$ direction, while the primary compression spring ($k_p, x_{p,0}$) provides an opposing restoring force. The lower flyweight–ramp pair is symmetric and shown unlabeled for clarity.

Centrifugal Loading of Flyweights From [Theory 5 \(Centrifugal Force\)](#),

$$F_c = m\omega^2 r.$$

Let

- m_f denote the flyweight mass,
- $r_{f,0}$ denote the initial flyweight radius at $s = 0$,
- $r_f(s)$ denote the incremental radial change produced by the ramp.

The total effective flyweight radius is therefore

$$r_{f,\text{tot}}(s) = r_{f,0} + r_f(s).$$

The radial centrifugal force is

$$F_{p,\text{rad}}(s, \omega_p) = m_f \omega_p^2 (r_{f,0} + r_f(s)). \quad (3.2.6)$$

Radial-to-Axial Projection The ramp redirects radial force into axial force. As shown in [Figure 3.8](#), the axial component of a force acting along the ramp is obtained by

$$F_{p,\text{axial component}} = F_{p,\text{rad}} \tan \alpha_p(s). \quad (3.2.7)$$

From [Equation \(3.2.3\)](#), the ramp angle satisfies

$$\tan \alpha_p(s) = \frac{dr_f}{ds}.$$

Substituting gives

$$F_{p,\text{cent}}(s, \omega_p) = m_f \omega_p^2 (r_{f,0} + r_f(s)) \frac{dr_f}{ds}. \quad (3.2.8)$$

Thus the axial gain of centrifugal force is governed by the local ramp slope, while the centrifugal magnitude depends on the total flyweight radius.

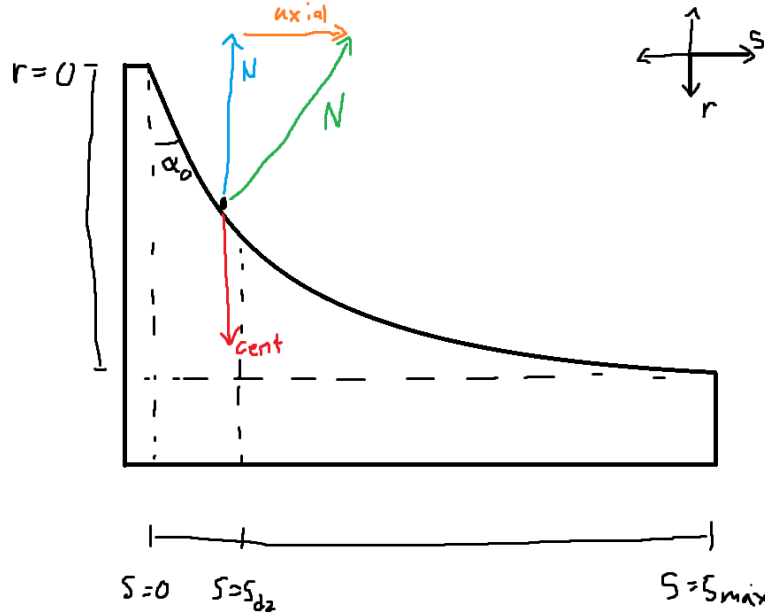


Figure 3.8: Primary ramp geometry. Radial centrifugal force is redirected into axial force through the ramp. The projection introduces a factor of $\tan \alpha_p$, which equals dr_f/ds by definition of the ramp slope.

Primary Compression Spring From [Theory 6 \(Hooke's Law \(Compressional\)\)](#),

$$F = k\Delta x.$$

Let k_p denote primary stiffness and $x_{p,0}$ preload.

$$F_{p,\text{spring}}(s) = k_p(x_{p,0} + s). \quad (3.2.9)$$

Net Primary Axial Force The net axial force generated by the primary mechanism is the difference between the centrifugal axial component and the spring force:

Primary Axial Force	(3.2.10)
$F_{p,\text{ax}}(s, \omega_p) = m_f \omega_p^2 (r_{f,0} + r_f(s)) \frac{dr_f}{ds} - k_p(x_{p,0} + s).$	

3.2.3 Secondary Axial Force Model

The secondary pulley generates axial clamping force in two ways. First, the secondary spring directly presses the sheaves together through axial compression. Second, the helix mechanism converts torque carried by the secondary pulley into additional axial force. The secondary is therefore torque-reactive: larger transmitted torque can increase the clamping force applied to the belt.

The goal of this section is to derive the net secondary axial force $F_{s,\text{ax}}$. The derivation follows the physical mechanism directly: determine the torque reacted through the helix, convert that reacted torque into axial force through the helix geometry, and then add the direct compression spring force.

The secondary assembly consists of a fixed sheave, a movable sheave, a helical slot between them, and a spring. The fixed sheave is attached to the secondary shaft. The movable sheave can translate axially, but the helix constrains that translation to occur with relative rotation between the movable and fixed sheaves. Under **Assumption 2 (Rigid Structural Components)**, this coupled motion is treated as a rigid geometric constraint.

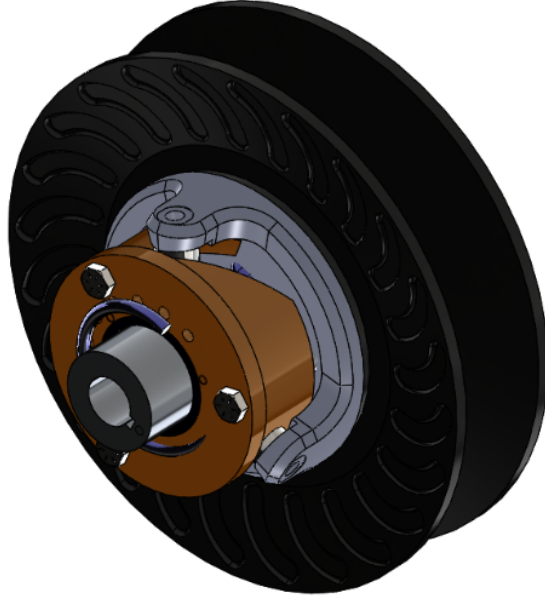


Figure 3.9: Secondary CVT assembly showing the helix mechanism and spring. The helix is modeled as a captured slot, so axial displacement of the movable sheave is coupled to relative rotation between the movable and fixed sheaves.

Physical Role of the Helix

The helix acts like a screw-like constraint between the fixed and movable secondary sheaves. A screw produces axial force only when relative rotation is resisted. The same idea applies here: torque applied to the movable sheave tends to rotate it relative to the fixed sheave. Because the movable sheave is captured by the helix, that relative rotation is tied to axial motion. The helix therefore reacts torque, and the inclined helix path converts that reacted torque into axial force.

This gives the structure of the force model. The helix contribution is not determined by secondary speed alone. It is determined by the torque that the movable sheave attempts to pass through the helix, after accounting for the torque required to accelerate the movable sheave itself.

Let τ_s denote the total signed torque transmitted from the belt to the secondary pulley. Under **Assumption 8 (Equal Secondary Sheave-Face Torque Partition)**, this torque is treated as equally shared between the fixed and movable secondary sheave faces. The belt-applied torque acting on the movable sheave is therefore

$$\tau_{b,M} = \frac{\tau_s}{2}. \quad (3.2.11)$$

This is the portion of the belt torque that appears on the movable-sheave free body and can therefore load the helix.

Movable-Sheave Kinematics

The helix geometry was parameterized earlier by the relative rotation mapping

$$\theta_s = \theta_s(s), \quad (3.2.12)$$

as introduced in [Equation \(3.2.4\)](#). Here, θ_s is the relative rotation between the movable and fixed secondary sheaves.

The fixed sheave is attached to the secondary shaft, so its angular velocity is

$$\omega_F = \omega_s. \quad (3.2.13)$$

The movable sheave does not generally rotate at this same speed while the CVT is shifting. With the sign convention used here, positive helix rotation means that the movable sheave lags the fixed sheave, so

$$\dot{\theta}_s = \omega_s - \omega_M. \quad (3.2.14)$$

Since the helix angle is a function of the shift coordinate,

$$\dot{\theta}_s = \frac{d\theta_s}{ds} \dot{s}. \quad (3.2.15)$$

Combining these two relations gives the angular velocity of the movable sheave:

$$\omega_M = \omega_s - \frac{d\theta_s}{ds} \dot{s}. \quad (3.2.16)$$

Thus, secondary shift does not only move the sheave axially. It also changes the movable sheave's angular speed relative to the fixed sheave by an amount set by the helix slope.

Differentiating [Equation \(3.2.16\)](#) gives

$$\dot{\omega}_M = \dot{\omega}_s - \frac{d^2\theta_s}{ds^2} \dot{s}^2 - \frac{d\theta_s}{ds} \ddot{s}. \quad (3.2.17)$$

This acceleration is needed because torque applied to the movable sheave has two possible roles: it can be reacted through the helix, or it can angularly accelerate the movable sheave.

Torque Reacted Through the Helix

The movable sheave is now treated as a rotating rigid body. Under [Assumption 13 \(Lumped Inertia Representation\)](#), its inertia about the secondary shaft is represented by the scalar I_M .

The torques acting on the movable sheave are the belt-applied torque $\tau_s/2$, the torsional spring torque, and the torque applied by the helix. The secondary spring is twisted by the same relative sheave rotation that is imposed by the helix. With torsional stiffness $k_{s,\theta}$ and preload deflection $\theta_{s,0}$, the spring torque is

$$\tau_{s,\text{spring}}(s) = k_{s,\theta}(\theta_{s,0} + \theta_s(s)). \quad (3.2.18)$$

Let $\tau_{\text{helix} \rightarrow M}$ denote the torque applied by the helix to the movable sheave. Applying [Theory 2 \(Newton's Second Law \(Rotation\)\)](#) to the movable sheave gives

$$\frac{\tau_s}{2} + \tau_{s,\text{spring}} + \tau_{\text{helix} \rightarrow M} = I_M \dot{\omega}_M. \quad (3.2.19)$$

The quantity needed for axial clamping is the equal and opposite torque applied by the movable sheave into the helix:

$$\tau_{M \rightarrow \text{helix}} = -\tau_{\text{helix} \rightarrow M}. \quad (3.2.20)$$

Solving the movable-sheave torque balance for this reacted torque gives

$$\tau_{M \rightarrow \text{helix}} = \frac{\tau_s}{2} + \tau_{s,\text{spring}} - I_M \dot{\omega}_M. \quad (3.2.21)$$

Substituting [Equation \(3.2.18\)](#) and [Equation \(3.2.17\)](#) gives the reacted helix torque in terms of the state and acceleration variables:

$$\tau_{M \rightarrow \text{helix}} = \frac{\tau_s}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left[\dot{\omega}_s - \frac{d^2\theta_s}{ds^2} \dot{s}^2 - \frac{d\theta_s}{ds} \ddot{s} \right]. \quad (3.2.22)$$

This equation is the core of the secondary mechanism. The helix reacts the movable-face belt torque and the torsional spring torque, except for the portion of torque required to angularly accelerate the movable sheave.

Conversion from Reacted Torque to Axial Force

The remaining step is geometric. The helix relates axial displacement to relative rotation. For a virtual axial displacement δs , the corresponding relative rotation is

$$\delta\theta_s = \frac{d\theta_s}{ds} \delta s.$$

By virtual work, the axial force associated with the reacted helix torque is

$$F_{s,\text{helix}} = \tau_{M \rightarrow \text{helix}} \frac{d\theta_s}{ds}. \quad (3.2.23)$$

A steeper torque-to-shift mapping therefore produces a larger axial force from the same reacted torque.

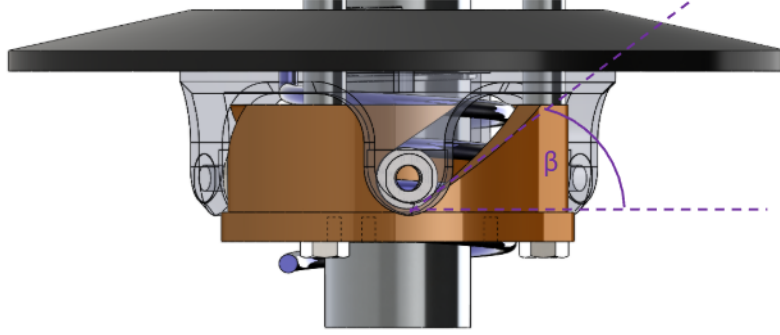


Figure 3.10: Helix free-body concept. Torque applied to the movable sheave is reacted through the helix. Because the helix is inclined, the reacted torque produces an axial force proportional to $d\theta_s/ds$.

Substituting Equation (3.2.22) into Equation (3.2.23) gives

$$F_{s,\text{helix}} = \frac{d\theta_s}{ds} \left[\frac{\tau_s}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left(\dot{\omega}_s - \frac{d^2\theta_s}{ds^2} \dot{s}^2 - \frac{d\theta_s}{ds} \ddot{s} \right) \right]. \quad (3.2.24)$$

The terms inside the brackets are the torque that the helix must react. The factor multiplying the brackets is the helix slope that converts that reacted torque into axial force.

Direct Compression Spring Force

The secondary spring also contributes directly through axial compression. At $s = 0$, the spring is pre-compressed by $x_{s,0}$. As the secondary sheaves open with increasing shift, the compression increases by s . From Theory 6 (Hooke's Law (Compressional)), the direct axial spring force is

$$F_{s,\text{comp}}(s) = k_{s,x}(x_{s,0} + s). \quad (3.2.25)$$

This force exists even if no torque is being transmitted. It provides the baseline secondary clamping contribution, while the helix contribution adds the torque-reactive part.

Net Secondary Axial Force

The net secondary axial force is the sum of the direct compression-spring force and the helix-generated force:

Secondary Axial Force	(3.2.26)
$F_{s,\text{ax}} = k_{s,x}(x_{s,0} + s) + \frac{d\theta_s}{ds} \left[\frac{\tau_s}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left(\dot{\omega}_s - \frac{d^2\theta_s}{ds^2} \dot{s}^2 - \frac{d\theta_s}{ds} \ddot{s} \right) \right].$	

This form mirrors the physical mechanism. The first term is the direct axial spring force. The second term is the helix force: the torque reacted through the movable sheave and spring is converted into axial force by the helix slope. The inertial term appears because part of the movable-sheave torque is used to accelerate the movable sheave rather than being reacted through the helix.

The secondary force therefore increases with axial spring compression, torsional spring wind-up, and transmitted secondary torque. It is also affected by the motion of the secondary sheave, because the helix couples axial shift to relative rotation. This is why the secondary is a torque-reactive clamping mechanism rather than a simple position-dependent spring.

3.2.4 Belt Centrifugal Force on the Wrap

In addition to the actuator and spring forces derived previously, the belt itself generates centrifugal loading as it rotates around each pulley. This section derives the resulting contribution to axial clamping force.

Throughout this section, let

$$j \in \{p, s\}$$

denote either pulley, where $j = p$ corresponds to the primary and $j = s$ corresponds to the secondary.

From [Theory 5 \(Centrifugal Force\)](#), a mass m rotating at angular velocity ω at radius r experiences centrifugal force

$$F_c = m\omega^2 r.$$

To apply this to the belt wrapped around pulley j , three quantities must be defined:

1. the radius at which the belt mass rotates,
2. the mass of belt material carried around the wrap,
3. the angular velocity of that belt mass.

Each is developed below.

1. Radius at Which the Belt Mass Rotates Centrifugal force acts at the center of mass of the rotating belt element, not at the outer or inner belt surface. The location of this center of mass therefore determines the radius that must be used in the centrifugal force calculation.

The belt cross-section is approximated as a trapezoid (see [Figure 3.11](#)) with:

- radial thickness h_b ,
- outer width b_{out} ,
- inner width b_{in} .

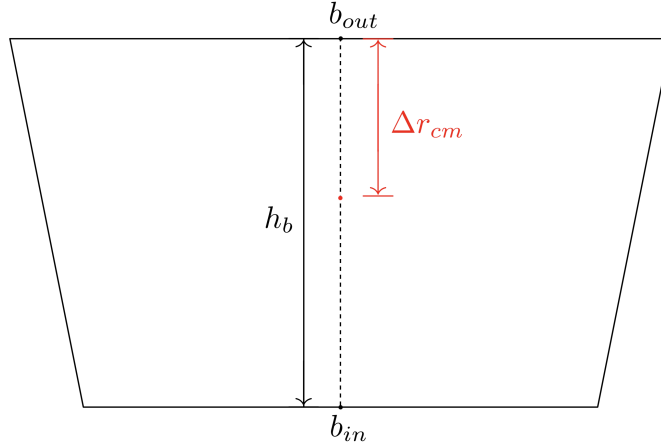


Figure 3.11: Trapezoidal belt cross-section. The outer width b_{out} corresponds to the surface away from the pulley axis; the inner width b_{in} corresponds to the surface closer to the axis. The radial thickness is h_b and the centroid is located at Δr_{cm} from the outer surface.

The cross-sectional area of the trapezoid is

$$A_b = \frac{h_b}{2} (b_{\text{out}} + b_{\text{in}}). \quad (3.2.27)$$

Let y denote radial distance measured inward from the outer surface, so that $y = 0$ at the outer surface and $y = h_b$ at the inner surface. For a trapezoid with linear sidewalls, the local width varies linearly with y :

$$b(y) = b_{\text{out}} + \frac{b_{\text{in}} - b_{\text{out}}}{h_b} y. \quad (3.2.28)$$

The centroid location Δr_{cm} , measured inward from the outer surface, follows from the area-centroid definition:

$$\Delta r_{\text{cm}} = \frac{1}{A_b} \int_0^{h_b} y b(y) \, dy. \quad (3.2.29)$$

Substituting Equation (3.2.28) into Equation (3.2.29) gives

$$\begin{aligned}
\int_0^{h_b} y b(y) \, dy &= \int_0^{h_b} y \left(b_{\text{out}} + \frac{b_{\text{in}} - b_{\text{out}}}{h_b} y \right) \, dy \\
&= \int_0^{h_b} b_{\text{out}} y \, dy + \frac{b_{\text{in}} - b_{\text{out}}}{h_b} \int_0^{h_b} y^2 \, dy \\
&= \frac{h_b^2}{2} b_{\text{out}} + \frac{h_b^2}{3} (b_{\text{in}} - b_{\text{out}}) \\
&= \frac{h_b^2}{6} (b_{\text{out}} + 2b_{\text{in}}). \tag{3.2.30}
\end{aligned}$$

Dividing by the area from Equation (3.2.27) yields

$$\Delta r_{\text{cm}} = h_b \frac{b_{\text{out}} + 2b_{\text{in}}}{3(b_{\text{out}} + b_{\text{in}})}. \tag{3.2.31}$$

For pulley j , let $r_{j,\text{out}}(s)$ denote the outer belt radius. The radius at which the belt mass rotates is therefore

$$r_{j,\text{cm}}(s) = r_{j,\text{out}}(s) - \Delta r_{\text{cm}}. \tag{3.2.32}$$

2. Mass of Belt Material on the Wrap To determine the centrifugal loading on pulley j , we next determine the amount of belt mass associated with an infinitesimal portion of its wrap.

Let θ denote the angular coordinate measured from the center of the wrap, so that the wrapped region on pulley j spans

$$\theta \in \left[-\frac{\phi_j}{2}, \frac{\phi_j}{2} \right],$$

where $\phi_j(s)$ is the total wrap angle on pulley j (see Figure 3.12).

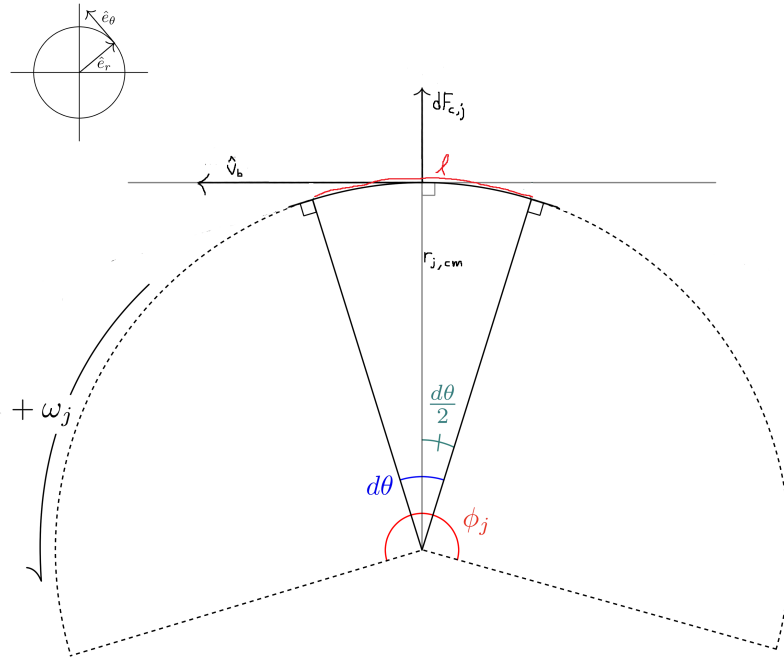


Figure 3.12: Belt wrapped around pulley j . A differential element at angle θ has arc length $d\ell = r_{j,\text{cm}} d\theta$ and experiences radially outward centrifugal force.

A differential belt element subtending angle $d\theta$ at the mass-centroid radius $r_{j,\text{cm}}$ has arc length

$$d\ell = r_{j,\text{cm}} d\theta.$$

Since the belt has cross-sectional area A_b , the differential belt element has volume

$$dV_j = A_b d\ell. \quad (3.2.33)$$

Substituting $d\ell = r_{j,\text{cm}} d\theta$ gives

$$dV_j = A_b r_{j,\text{cm}} d\theta. \quad (3.2.34)$$

Let ρ_b denote the belt material density (kg/m^3). The corresponding differential mass is then

$$\begin{aligned} dm_j &= \rho_b dV_j \\ &= \rho_b A_b r_{j,\text{cm}} d\theta. \end{aligned} \quad (3.2.35)$$

This gives the amount of belt material associated with an infinitesimal portion of the wrap on pulley j .

3. Angular Velocity of the Belt Mass The rotating belt mass on pulley j must also be assigned an angular speed. From [Section 2.5](#), v_b denotes the belt transport speed. The corresponding angular velocity of the belt mass centroid on pulley j is then

$$\omega_{b,j} = \frac{v_b}{r_{j,\text{cm}}(s)}. \quad (3.2.36)$$

This relation expresses the fact that the same belt transport speed corresponds to different local angular velocities depending on the radius of motion.

Distributed Centrifugal Load Along the Wrap With the radius, differential mass, and angular velocity now defined, the centrifugal force on the differential belt element follows from [Theory 5 \(Centrifugal Force\)](#):

$$\begin{aligned} dF_{c,j} &= dm_j \omega_{b,j}^2 r_{j,\text{cm}} \\ &= (\rho_b A_b r_{j,\text{cm}} d\theta) \left(\frac{v_b}{r_{j,\text{cm}}} \right)^2 r_{j,\text{cm}} \\ &= \rho_b A_b v_b^2 d\theta. \end{aligned} \quad (3.2.37)$$

This force acts radially outward at each point along the wrap.

Total Radial Force Over the Wrap Integrating [Equation \(3.2.37\)](#) over the full wrap angle gives the total radially-directed centrifugal force on pulley j :

$$\begin{aligned} F_{c,j,\text{rad}} &= \int_{-\phi_j/2}^{\phi_j/2} \rho_b A_b v_b^2 d\theta \\ &= \rho_b A_b v_b^2 \int_{-\phi_j/2}^{\phi_j/2} d\theta \\ &= \rho_b A_b v_b^2 \phi_j(s). \end{aligned} \quad (3.2.38)$$

Radial-to-Axial Conversion Through the Sheave Cone The radial centrifugal force acts outward against the conical sheave faces. Because the sheaves are inclined at cone half-angle β , radial loading cannot occur without simultaneous axial motion of the sheaves. Thus, a purely radial force applied to the belt generates an axial reaction component that contributes to clamping.

From the pulley geometry derived previously (see [Equation \(3.1.2\)](#)), the relationship between radial and axial displacement in the active shift region is

$$\frac{dr}{ds} = \frac{1}{2 \tan \beta}.$$

For an infinitesimal displacement,

$$\delta W = F_{\text{rad}} \, dr = F_{\text{ax}} \, ds.$$

Substituting $dr = \frac{1}{2 \tan \beta} ds$ gives

$$F_{\text{rad}} \frac{1}{2 \tan \beta} ds = F_{\text{ax}} \, ds.$$

Canceling ds yields

$$F_{\text{ax}} = \frac{F_{\text{rad}}}{2 \tan \beta}. \quad (3.2.39)$$

Thus, the axial clamping contribution from belt centrifugal force on pulley j is

$$F_{c,j} = \frac{\rho_b A_b v_b^2 \phi_j(s)}{2 \tan \beta}. \quad (3.2.40)$$

3.2.5 Axial Shift Dynamics

The previous subsections derived the axial forces produced by the primary and secondary pulley mechanisms. The remaining task is to use those forces to determine the motion of the shift coordinate $s(t)$.

The shift coordinate represents coordinated motion of several physical bodies. As s increases, the primary movable sheave closes, the secondary movable sheave opens through the belt-length constraint, and belt material migrates through the pulley grooves. The axial equation of motion is therefore written in the generalized coordinate s , with all force and inertia terms expressed in that coordinate.

From the axial force balance introduced in [Equation \(3.2.1\)](#),

$$m \ddot{s} = F_{p,\text{ax}} - F_{s,\text{ax}}, \quad (3.2.41)$$

where $F_{p,\text{ax}}$ acts in the positive s direction and $F_{s,\text{ax}}$ opposes it. This section replaces the placeholder mass m with the equivalent inertia associated with the shift coordinate and then adds the axial belt centrifugal contributions derived in [Section 3.2.4](#).

Equivalent Inertia in the Shift Coordinate

Since s is a generalized coordinate, the inertia associated with shift is constructed from kinetic energy. Following [Theory 4 \(Kinetic Energy \(Translational\)\)](#), the translational kinetic energy associated with shift is written as

$$T_{\text{shift}} = \frac{1}{2} m_{\text{eq}} \dot{s}^2.$$

The movable primary sheave translates with speed $\dot{s}$. The movable secondary sheave translates with the same speed magnitude in the opposite physical direction, so its kinetic energy also contributes to

the same generalized coordinate. Let $m_{p,m}$ and $m_{s,m}$ denote the translating masses of the primary and secondary movable sheaves.

The belt also contributes to the shift inertia. Under **Assumption 10 (Constant Belt Length)**, the total belt mass is constant and is

$$m_b = \rho_b A_b L_b, \quad (3.2.42)$$

where A_b is the trapezoidal belt cross-sectional area from **Equation (3.2.27)**. Under **Assumption 11 (Single Belt Transport Speed)**, the belt is represented by a single lumped transport speed, while the simplified axial contribution associated with radial migration through the groove is represented by the effective axial speed

$$\dot{s}_b = \frac{\dot{s}}{2}. \quad (3.2.43)$$

The belt kinetic energy associated with this axial component is therefore

$$T_b = \frac{1}{2} m_b \left(\frac{\dot{s}}{2} \right)^2 = \frac{1}{2} \left(\frac{m_b}{4} \right) \dot{s}^2.$$

Thus, the base equivalent mass associated with translation in the shift coordinate is

$$m_{\text{eq}} = m_{p,m} + m_{s,m} + \frac{m_b}{4} = m_{p,m} + m_{s,m} + \frac{\rho_b A_b L_b}{4}. \quad (3.2.44)$$

This mass accounts for the translating sheaves and the simplified axial belt motion. The rotational inertia coupled through the secondary helix is collected separately below.

Secondary Force Split

The secondary axial force derived in **Equation (3.2.26)** contains the movable-sheave angular acceleration. This occurs because the helix couples axial shift to relative sheave rotation. Written as a function of the quantities that enter the shift equation,

$$F_{s,\text{ax}} = F_{s,\text{ax}}(s, \dot{s}, \tau_s, \dot{\omega}_s, \ddot{s}). \quad (3.2.45)$$

Recalling **Equation (3.2.26)**, with the movable-sheave torque contribution written using **Assumption 8 (Equal Secondary Sheave-Face Torque Partition)**,

$$F_{s,\text{ax}} = k_{s,x}(x_{s,0} + s) + \frac{d\theta_s}{ds} \left[\frac{\tau_s}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left(\dot{\omega}_s - \frac{d^2\theta_s}{ds^2} \dot{s}^2 - \frac{d\theta_s}{ds} \ddot{s} \right) \right]. \quad (3.2.46)$$

To place this force into the shift equation, separate the part that does not multiply $\ddot{s}$ from the part that does:

$$F_{s,\text{ax}} = \hat{F}_{s,\text{ax}} + I_M \left(\frac{d\theta_s}{ds} \right)^2 \ddot{s}. \quad (3.2.47)$$

The acceleration-independent part is

$$\hat{F}_{s,\text{ax}} = k_{s,x}(x_{s,0} + s) + \frac{d\theta_s}{ds} \left[\frac{\tau_s}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left(\dot{\omega}_s - \frac{d^2\theta_s}{ds^2} \dot{s}^2 \right) \right]. \quad (3.2.48)$$

This split is purely algebraic. It keeps the same secondary force model, but makes clear that the movable-sheave rotational inertia appears in the shift coordinate as the reflected inertia term

$$I_M \left(\frac{d\theta_s}{ds} \right)^2.$$

Generalized Axial Force Balance

The generalized force in the positive s direction is obtained by collecting the primary-side contributions that drive upshift and subtracting the secondary-side contributions that resist it. The forces entering this balance are:

- the primary mechanism force $F_{p,\text{ax}}(s, \omega_p)$ from Equation (3.2.10),
- the secondary mechanism force $F_{s,\text{ax}}$ from Equation (3.2.26),
- the primary belt centrifugal contribution $F_{c,p}(s, v_b)$ from Equation (3.2.40),
- the secondary belt centrifugal contribution $F_{c,s}(s, v_b)$ from Equation (3.2.40).

With the sign convention of s , the generalized force balance is

$$\sum F_s = (F_{p,\text{ax}} + F_{c,p}) - (F_{s,\text{ax}} + F_{c,s}). \quad (3.2.49)$$

Substituting the secondary force split from Equation (3.2.47) gives

$$m_{\text{eq}} \ddot{s} = (F_{p,\text{ax}} + F_{c,p}) - \left(\hat{F}_{s,\text{ax}} + I_M \left(\frac{d\theta_s}{ds} \right)^2 \ddot{s} + F_{c,s} \right). \quad (3.2.50)$$

Collecting the terms proportional to $\ddot{s}$ gives

$$\left[m_{\text{eq}} + I_M \left(\frac{d\theta_s}{ds} \right)^2 \right] \ddot{s} = (F_{p,\text{ax}} + F_{c,p}) - (\hat{F}_{s,\text{ax}} + F_{c,s}). \quad (3.2.51)$$

This form has the expected physical structure. The numerator is the net generalized force trying to move the CVT through its shift range. The bracketed factor on the left is the effective inertia associated with that motion: the translating components and the movable secondary sheave inertia reflected through the helix.

Explicit Shift Acceleration

Substituting the equivalent mass from Equation (3.2.44) into Equation (3.2.51) gives the explicit shift acceleration:

$$\ddot{s} = \frac{\left(F_{p,\text{ax}}(s, \omega_p) + F_{c,p}(s, v_b)\right) - \left(\widehat{F}_{s,\text{ax}}(s, \dot{s}, \tau_s, \dot{\omega}_s) + F_{c,s}(s, v_b)\right)}{m_{p,m} + m_{s,m} + \frac{\rho_b A_b L_b}{4} + I_M \left(\frac{d\theta_s}{ds}\right)^2}.$$

where

$$\widehat{F}_{s,\text{ax}}(s, \dot{s}, \tau_s, \dot{\omega}_s) = k_{s,x}(x_{s,0} + s) + \frac{d\theta_s}{ds} \left[\frac{\tau_s}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left(\dot{\omega}_s - \frac{d^2\theta_s}{ds^2} \dot{s}^2 \right) \right]. \quad (3.2.53)$$

The shift acceleration therefore follows the same structure as any second-order force balance: net generalized force divided by effective inertia. The primary mechanism and primary belt centrifugal contribution drive positive shift, while the secondary mechanism and secondary belt centrifugal contribution oppose it. The secondary term depends on the transmitted secondary torque τ_s and secondary angular acceleration $\dot{\omega}_s$, so the shift motion remains coupled to the rotational torque-transfer dynamics.

3.2.6 Section Summary and Forward Outlook

This section derived the axial force models for the primary and secondary pulley mechanisms and assembled them into an equation of motion for the generalized shift coordinate $s(t)$.

The resulting shift equation has the expected force-balance structure: primary mechanism force and primary belt centrifugal loading drive positive shift, while secondary clamping force and secondary belt centrifugal loading oppose it. The effective inertia in the denominator includes the translating sheaves, the simplified axial contribution of belt motion, and the movable secondary sheave inertia reflected through the helix constraint.

Importantly, the axial shift relation is not a standalone subsystem. The quantity $\ddot{s}$ is written in terms of the current state, but it also depends on two quantities that are not themselves state variables: the transmitted secondary torque τ_s and the secondary angular acceleration $\dot{\omega}_s$. These appear because the secondary clamping mechanism is torque-reactive and because the helix couples axial shift to relative rotation of the secondary sheaves.

Thus, the result of this section should be interpreted as one equation in the larger coupled CVT model. It gives the axial response that must be satisfied alongside the rotational equations for the primary pulley, belt, and secondary pulley. The following section develops those torque-transfer dynamics, which provide the remaining relations needed to determine τ_s , $\dot{\omega}_s$, and the other acceleration and torque unknowns.

With the axial mechanism model established, attention now turns to the torque path through the belt and pulleys. Combining that torque path with the shift relation derived here will provide the coupled dynamic closure used by the full CVT model.

3.3 Rotational and Belt Transport Dynamics

The axial force model developed in [Section 3.2](#) gives one equation for the shift coordinate $s(t)$. That equation depends on the transmitted secondary torque τ_s and on the secondary angular acceleration $\dot{\omega}_s$. Those quantities are determined by the torque path through the CVT.

This section derives the common equations of motion for the rotating and translating bodies in that torque path. The primary pulley, belt, and secondary pulley are treated as coupled dynamic bodies. Engine torque enters at the primary pulley, torque is exchanged between the primary pulley and the belt, the belt exchanges torque with the secondary pulley, and the secondary pulley drives the downstream drivetrain.

The equations derived here are independent of whether the belt is sticking or slipping at either pulley. They describe the bodies being accelerated; the contact state supplies the remaining closure equations later.

3.3.1 System Definition and Torque Path

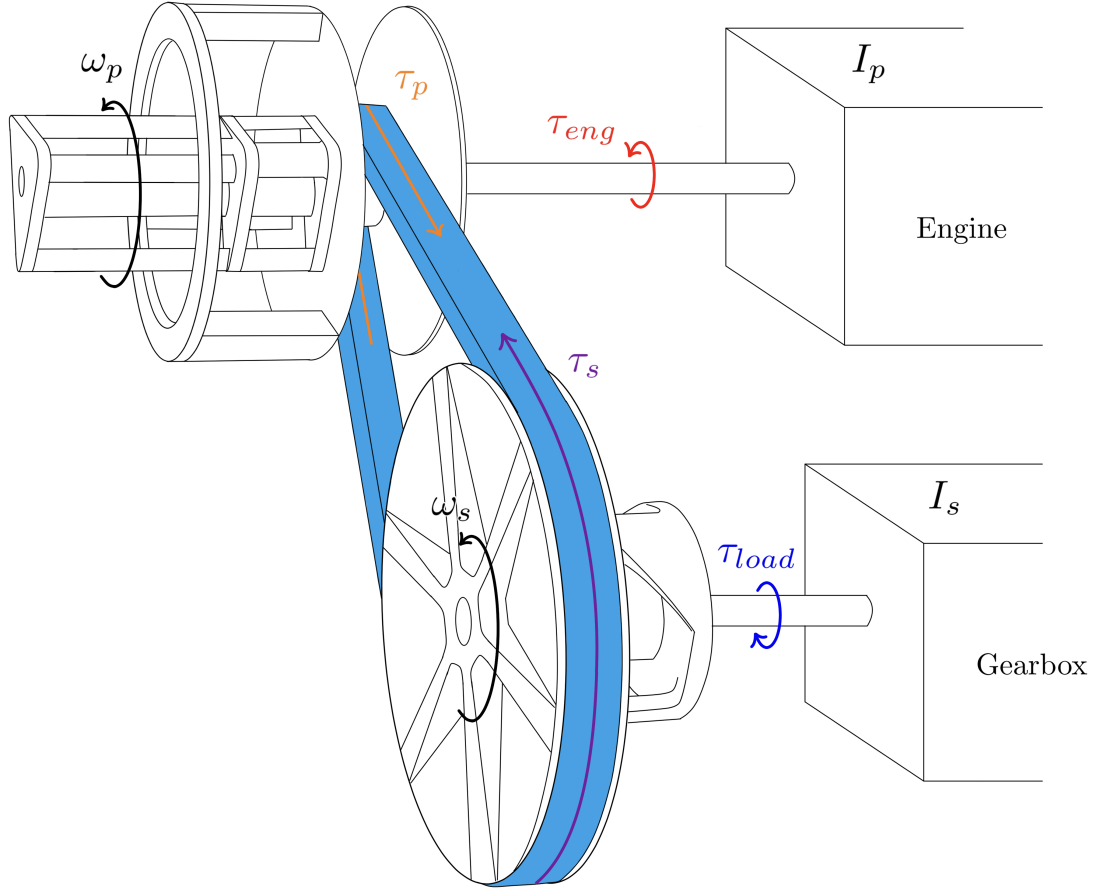


Figure 3.13: Torque path through the CVT. Engine torque τ_{eng} drives the primary pulley with angular speed ω_p . The primary pulley exchanges torque with the belt, the belt exchanges torque with the secondary pulley, and the secondary pulley drives the downstream drivetrain while opposing the reflected load torque τ_{load} .

The torque path shown in [Figure 3.13](#) is described using three contact torques and three dynamic motions:

- the primary pulley rotates with angular speed ω_p ,
- the belt translates with transport speed v_b ,
- the secondary shaft and fixed sheave rotate with angular speed ω_s .

The primary pulley receives engine torque τ_{eng} . Let τ_p denote the torque exerted by the belt contact on the primary pulley. With the rotational sign convention from [Section 2.3.1](#), τ_p opposes positive engine-driven primary rotation.

The belt receives torque from the primary contact and applies torque to the secondary contact. Let τ_s denote the total signed torque exerted by the belt on the secondary pulley. This torque acts in

the positive secondary rotational direction, while the reflected drivetrain load τ_{load} opposes it.

3.3.2 Engine Torque Model

The engine provides the driving torque $\tau_{\text{eng}}(t)$ acting on the primary pulley. Under **Assumption 18 (Full-Throttle Engine Model)**, engine torque is represented as a prescribed full-throttle function of primary angular speed:

$$\tau_{\text{eng}}(t) = \tau_{\text{eng}}(\omega_p(t)). \quad (3.3.1)$$

No specific analytic form is required. The model only requires that the mapping $\omega_p \mapsto \tau_{\text{eng}}$ be finite over the operating range used in simulation. Outside the supplied range, the torque curve is either saturated or the state is constrained to remain within the admissible engine-speed domain.

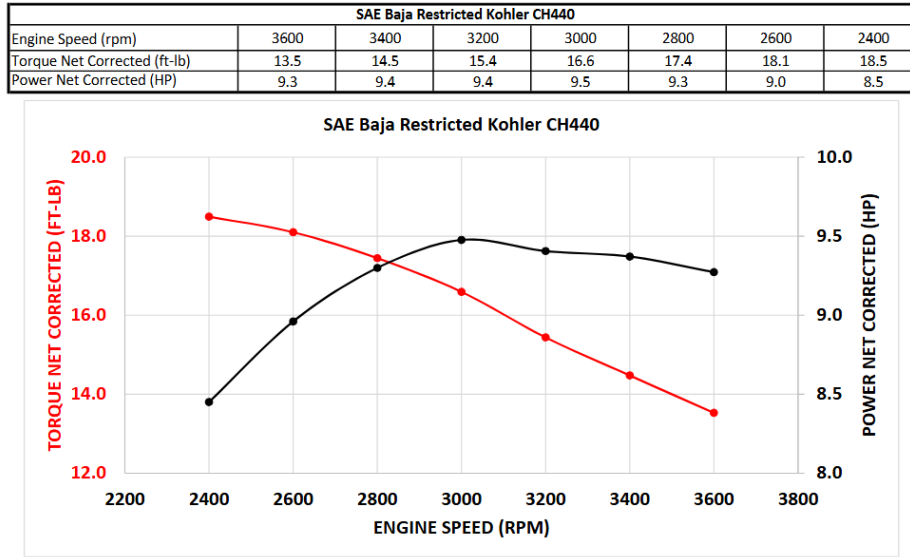


Figure 3.14: Representative torque and power curves for the Kohler CH440 engine. Torque is supplied as a function of angular velocity and serves as the input mapping in **Equation (3.3.1)**.

In simulation, the discrete torque curve is interpolated to provide a continuous input torque over the operating range.

3.3.3 Load Torque Model

The resisting torque $\tau_{\text{load}}(t)$ represents the longitudinal vehicle load reflected back to the secondary pulley.

Let r_w denote the effective wheel rolling radius and let $G > 0$ denote the fixed gear ratio defined by

$$\omega_s = G \omega_w.$$

The vehicle speed is therefore

$$v(t) = r_w \omega_w(t) = \frac{r_w}{G} \omega_s(t). \quad (3.3.2)$$

The total longitudinal road force is modeled as the sum of rolling resistance, grade resistance, and aerodynamic drag:

$$F_{\text{road}} = F_{\text{rr}} + F_{\text{grade}} + F_{\text{drag}}. \quad (3.3.3)$$

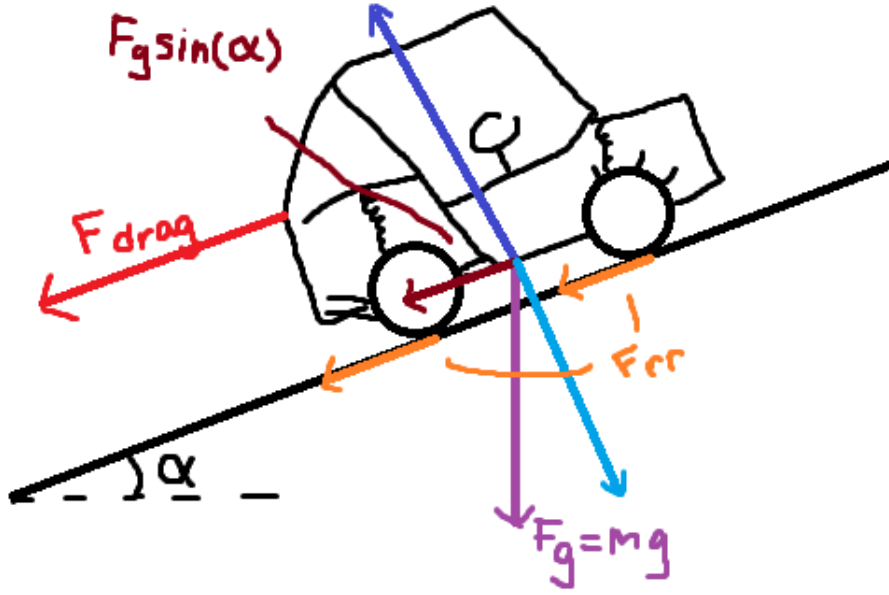


Figure 3.15: Free-body diagram of a vehicle on an incline. The weight mg resolves into $mg \sin \alpha$ along the slope and $mg \cos \alpha$ normal to the surface. Rolling resistance and aerodynamic drag oppose motion.

Using [Theory 13 \(Rolling Resistance\)](#), [Theory 14 \(Gravitational Force\)](#), and [Theory 12 \(Air Resistance \(Quadratic Drag\)\)](#), the road-load components are

$$F_{\text{rr}}(v, \alpha) = C_{\text{rr}} mg \cos \alpha \operatorname{sgn}(v), \quad (3.3.4)$$

$$F_{\text{grade}}(\alpha) = mg \sin \alpha, \quad (3.3.5)$$

and

$$F_{\text{drag}}(v) = \frac{1}{2} \rho C_d A_f v^2 \operatorname{sgn}(v). \quad (3.3.6)$$

Substituting these terms into [Equation \(3.3.3\)](#) gives

$$F_{\text{road}}(t) = C_{\text{rr}}mg \cos \alpha \operatorname{sgn}(v(t)) + mg \sin \alpha + \frac{1}{2}\rho C_d A_f v(t)^2 \operatorname{sgn}(v(t)). \quad (3.3.7)$$

The wheel torque associated with this road load is

$$\tau_{\text{road},w}(t) = r_w F_{\text{road}}(t). \quad (3.3.8)$$

With the downstream fixed-ratio drive treated as ideal under **Assumption 16 (No Explicit CVT Loss or Thermal Model)**, the resisting torque reflected to the secondary pulley is

$$\tau_{\text{load}}(t) = \frac{1}{G} \tau_{\text{road},w}(t) = \frac{r_w}{G} F_{\text{road}}(t). \quad (3.3.9)$$

Using $v = (r_w/G)\omega_s$, this becomes

$$\tau_{\text{load}}(t) = \frac{r_w}{G} \left[C_{\text{rr}}mg \cos \alpha \operatorname{sgn}\left(\frac{r_w}{G}\omega_s(t)\right) + mg \sin \alpha + \frac{1}{2}\rho C_d A_f \left(\frac{r_w}{G}\omega_s(t)\right)^2 \operatorname{sgn}\left(\frac{r_w}{G}\omega_s(t)\right) \right]. \quad (3.3.10)$$

3.3.4 Inertia Definitions

The rotational equations require inertias expressed about the primary and secondary axes. Under **Assumption 13 (Lumped Inertia Representation)**, these inertias are treated as lumped scalar quantities about their corresponding shafts.

Primary-Side Inertia

The primary pulley is rigidly connected to the engine side. All components in this lump rotate with angular speed ω_p , so the primary-side inertia is

$$I_p = I_{\text{eng}} + I_{\text{prim}}, \quad (3.3.11)$$

where I_{eng} is the engine rotational inertia and I_{prim} is the primary pulley inertia.

Secondary Fixed-Side and Downstream Inertia

The secondary side requires one additional distinction. The fixed secondary sheave and downstream drivetrain rotate with ω_s . The movable secondary sheave does not generally rotate with exactly ω_s during shift, because the helix couples axial motion to relative rotation. Its rotational motion is therefore handled separately using the helix kinematics from **Equation (3.2.16)** and **Equation (3.2.17)**.

Let $I_{s,F}$ denote the inertia that rotates directly with the fixed secondary sheave and shaft, excluding the movable secondary sheave inertia I_M . This fixed-side inertia includes the fixed secondary

components, gearbox-side inertia, wheel inertia reflected through the fixed ratio, and the vehicle translational inertia reflected to the secondary axis.

The vehicle translational kinetic energy is

$$T_{\text{trans}} = \frac{1}{2}mv^2 = \frac{1}{2}m(r_w\omega_w)^2,$$

so the vehicle mass appears as an equivalent wheel-axis inertia mr_w^2 . Since $\omega_s = G\omega_w$, wheel-axis inertias reflect to the secondary axis by division by G^2 . Thus,

$$I_{s,F} = I_{\text{sec},F} + I_{\text{gb}} + \frac{I_{\text{wheel}} + mr_w^2}{G^2}. \quad (3.3.12)$$

Here $I_{\text{sec},F}$ includes the fixed secondary sheave and other secondary components that rotate directly with the secondary shaft. The movable secondary sheave inertia I_M is not included in $I_{s,F}$.

3.3.5 Common Equations of Motion

The primary pulley, belt, secondary fixed-side assembly, and shift coordinate provide the four common dynamic equations used in every contact state. The contact state will later determine the two additional closure equations.

Primary Pulley Rotational Dynamics

Applying [Theory 2 \(Newton's Second Law \(Rotation\)\)](#) to the primary pulley gives

Primary Pulley Rotational Dynamics	(3.3.13)
---	-----------------

$$\tau_{\text{eng}}(t) - \tau_p(t) = I_p\dot{\omega}_p(t)$$

The engine torque drives positive primary rotation, while the belt contact torque opposes it.

Belt Transport Dynamics

The belt is represented by the transport speed $v_b(t)$ introduced in [Section 2.5](#). Under [Assumption 10 \(Constant Belt Length\)](#) and [Assumption 11 \(Single Belt Transport Speed\)](#), the belt is modeled as a single moving path with one lumped transport speed.

A contact torque produces an equivalent belt-line force when divided by the effective torque radius from [Section 3.1.6](#). The primary contact contributes $\tau_p/r_{p,\text{eff}}$ to the belt-line motion, while the secondary contact contributes $\tau_s/r_{s,\text{eff}}$ in the opposing direction. Applying [Theory 1 \(Newton's Second Law \(Translation\)\)](#) to the belt gives

Belt Transport Dynamics	(3.3.14)
--------------------------------	-----------------

$$m_b\dot{v}_b(t) = \frac{\tau_p(t)}{r_{p,\text{eff}}(s)} - \frac{\tau_s(t)}{r_{s,\text{eff}}(s)}$$

where m_b is the total belt mass from Equation (3.2.42).

Secondary Rotational Dynamics

The secondary side is not treated as a single rigid body during shift. The fixed secondary sheave and downstream drivetrain rotate with the secondary shaft speed ω_s , while the movable secondary sheave rotates with ω_M . These two angular speeds are equal only when the secondary is not shifting. When the helix is active, axial motion of the movable sheave is accompanied by relative rotation, so the movable sheave must be counted with its own angular acceleration.

The cleanest way to write the secondary rotational balance is to consider the fixed-side secondary assembly and the movable sheave together as one system. The external torques on this combined secondary system are the total belt-applied secondary torque τ_s and the reflected load torque τ_{load} . The helix and spring torques between the fixed and movable sheaves are internal to this combined system, so they do not appear in the net external torque balance.

Let $I_{s,F}$ denote the inertia of the fixed-side secondary assembly, excluding the movable secondary sheave inertia I_M . The angular momentum of the secondary system about the shaft axis is then

$$L_s = I_{s,F}\omega_s + I_M\omega_M.$$

Applying Theory 2 (Newton's Second Law (Rotation)) in angular-momentum form gives

$$\tau_s - \tau_{\text{load}} = \frac{dL_s}{dt} = I_{s,F}\dot{\omega}_s + I_M\dot{\omega}_M. \quad (3.3.15)$$

The movable-sheave acceleration is not independent. From the helix kinematics derived in Equation (3.2.17),

$$\dot{\omega}_M = \dot{\omega}_s - \frac{d^2\theta_s}{ds^2}\dot{s}^2 - \frac{d\theta_s}{ds}\ddot{s}.$$

Substituting this relation into Equation (3.3.15) gives the secondary rotational equation in terms of the common dynamic variables:

Secondary Rotational Dynamics	(3.3.16)
$\tau_s - \tau_{\text{load}} = (I_{s,F} + I_M)\dot{\omega}_s - I_M \frac{d^2\theta_s}{ds^2}\dot{s}^2 - I_M \frac{d\theta_s}{ds}\ddot{s}$	

This form preserves the distinction between the fixed secondary components and the movable sheave. If the CVT is not shifting, then $\dot{s} = 0$ and $\ddot{s} = 0$, so the movable sheave rotates with the fixed sheave and the secondary inertia reduces to $I_{s,F} + I_M$. During shift, the helix introduces the additional coupling terms shown above.

3.3.6 Common Dynamic Relations and Remaining Closure

At this point, the model has four dynamic relations that are used regardless of the belt contact state. These are:

- primary rotational dynamics, [Equation \(3.3.13\)](#),
- belt transport dynamics, [Equation \(3.3.14\)](#),
- secondary rotational dynamics, [Equation \(3.3.16\)](#),
- axial shift dynamics, [Equation \(3.2.52\)](#).

The first three equations describe the torque path through the primary pulley, belt, and secondary pulley. The fourth equation carries the axial force balance into the same coupled system.

Together, the common dynamics involve the six unknown quantities

$$\dot{\omega}_p, \quad \dot{\omega}_s, \quad \dot{v}_b, \quad \ddot{s}, \quad \tau_p, \quad \tau_s.$$

The four equations above therefore describe the body dynamics, but they do not yet determine all six unknowns. Two additional relations are still needed to specify how torque is exchanged at the primary and secondary belt–pulley contacts.

This is where the belt contact state enters the model. The equations derived so far describe how the bodies respond to applied forces and torques; the contact relations determine what forces and torques can actually be exchanged between the belt and each pulley. The following section begins with the gross sticking case, where the belt is assumed to remain kinematically compatible with both pulley contacts.

3.4 Gross Stick Compatibility and No-Slip Candidate

The previous section established the common equations of motion for the primary pulley, belt, secondary assembly, and shift coordinate. These equations describe how the bodies respond to applied forces and torques, but they do not yet specify the contact state between the belt and the pulleys.

This section considers the gross sticking case. In this contact state, the belt is assumed to remain adhered to both pulleys at their effective torque radii. The resulting solution is the *no-slip candidate*: the accelerations and contact torques that would be required if both belt–pulley contacts remained stuck.

This candidate is not automatically admissible. It is first computed from the sticking constraints, then checked against the available traction limits in the following section.

3.4.1 Gross Stick Compatibility

Let $j \in \{p, s\}$ denote either the primary or secondary pulley. Under [Assumption 11 \(Single Belt Transport Speed\)](#), the belt is represented by a single transport speed v_b . Under [Assumption 12 \(Uniform Contact Radius Around Wrap\)](#), each pulley contact is represented by a single effective torque radius $r_{j,\text{eff}}$.

If the belt is grossly stuck to pulley j , the belt transport speed equals the tangential surface speed of that pulley at the effective torque radius:

$$v_b(t) = r_{j,\text{eff}}(s(t)) \omega_j(t), \quad j \in \{p, s\}. \quad (3.4.1)$$

Differentiating [Equation \(3.4.1\)](#) gives the acceleration-level stick compatibility condition:

Gross Stick Compatibility**(3.4.2)**

$$\dot{v}_b(t) = \frac{dr_{j,\text{eff}}}{ds} \dot{s}(t) \omega_j(t) + r_{j,\text{eff}}(s(t)) \dot{\omega}_j(t), \quad j \in \{p, s\}.$$

This equation is the contact closure for a stuck belt–pulley interface. It states that the belt-line acceleration must match the acceleration of the pulley surface at the effective radius, including the contribution from changing pulley radius during shift.

Solving Equation (3.4.2) for the pulley angular acceleration gives

$$\dot{\omega}_j(t) = \frac{\dot{v}_b(t) - \frac{dr_{j,\text{eff}}}{ds} \dot{s}(t) \omega_j(t)}{r_{j,\text{eff}}(s(t))}, \quad j \in \{p, s\}. \quad (3.4.3)$$

For the no-slip candidate, Equation (3.4.3) is applied at both the primary and secondary contacts.

3.4.2 No-Slip Candidate Solve

For compactness, define

$$r_p = r_{p,\text{eff}}(s), \quad r_s = r_{s,\text{eff}}(s),$$

and

$$\dot{r}_p = \frac{dr_{p,\text{eff}}}{ds} \dot{s}, \quad \dot{r}_s = \frac{dr_{s,\text{eff}}}{ds} \dot{s}.$$

Also define the effective shift inertia from Equation (3.2.52) as

$$M_{\text{shift}} = m_{p,m} + m_{s,m} + \frac{\rho_b A_b L_b}{4} + I_M \left(\frac{d\theta_s}{ds} \right)^2. \quad (3.4.4)$$

This is not a new model assumption; it is the denominator of the axial shift equation already derived.

Stick-Compatible Angular Accelerations

Applying the stick condition from Equation (3.4.3) at the primary pulley gives

$$\dot{\omega}_{p,\text{ns}} = \frac{\dot{v}_{b,\text{ns}} - \dot{r}_p \omega_p}{r_p}. \quad (3.4.5)$$

Applying the same condition at the secondary pulley gives

$$\dot{\omega}_{s,\text{ns}} = \frac{\dot{v}_{b,\text{ns}} - \dot{r}_s \omega_s}{r_s}. \quad (3.4.6)$$

Thus, once the no-slip belt acceleration $\dot{v}_{b,\text{ns}}$ is known, both pulley angular accelerations are known.

Primary No-Slip Torque Demand

The primary rotational equation is

$$\tau_{\text{eng}} - \tau_p = I_p \dot{\omega}_p.$$

Substituting Equation (3.4.5) gives the primary contact torque required to maintain no slip:

Primary No-Slip Torque Demand Before Belt Solve	(3.4.7)
--	----------------

$$\tau_{p,\text{ns}} = \tau_{\text{eng}} - I_p \left(\frac{\dot{v}_{b,\text{ns}} - \dot{r}_p \omega_p}{r_p} \right)$$

This is already expressed in terms of known state quantities and the single remaining unknown $\dot{v}_{b,\text{ns}}$.

Secondary No-Slip Torque Demand

The secondary torque demand is coupled to the axial shift equation because the secondary helix couples τ_s , $\dot{\omega}_s$, and $\ddot{s}$.

From Equation (3.2.52), the shift acceleration can be written directly as

$$\ddot{s}_{\text{ns}} = \frac{F_{p,\text{ax}} + F_{c,p} - F_{c,s} - k_{s,x}(x_{s,0} + s) - \frac{d\theta_s}{ds} \left[\frac{\tau_{s,\text{ns}}}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left(\dot{\omega}_{s,\text{ns}} - \frac{d^2\theta_s}{ds^2} \dot{s}^2 \right) \right]}{M_{\text{shift}}}. \quad (3.4.8)$$

The secondary rotational equation from Equation (3.3.16) is

$$\tau_{s,\text{ns}} - \tau_{\text{load}} = (I_{s,F} + I_M) \dot{\omega}_{s,\text{ns}} - I_M \frac{d^2\theta_s}{ds^2} \dot{s}^2 - I_M \frac{d\theta_s}{ds} \ddot{s}_{\text{ns}}. \quad (3.4.9)$$

Substituting Equation (3.4.8) into Equation (3.4.9), then collecting terms in $\tau_{s,\text{ns}}$, gives

$$\tau_{s,\text{ns}} = \frac{\tau_{\text{load}} + \left[I_{s,F} + I_M - \frac{I_M^2 \left(\frac{d\theta_s}{ds} \right)^2}{M_{\text{shift}}} \right] \dot{\omega}_{s,\text{ns}} - I_M \frac{d^2\theta_s}{ds^2} \dot{s}^2 - \frac{I_M \frac{d\theta_s}{ds}}{M_{\text{shift}}} \left[F_{p,\text{ax}} + F_{c,p} - F_{c,s} - k_{s,x}(x_{s,0} + s) - \frac{d\theta_s}{ds} k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \frac{d\theta_s}{ds} \frac{d^2\theta_s}{ds^2} \dot{s}^2 \right]}{1 - \frac{I_M \left(\frac{d\theta_s}{ds} \right)^2}{2M_{\text{shift}}}}. \quad (3.4.10)$$

Finally, substituting the secondary stick-compatible acceleration from Equation (3.4.6) gives the secondary torque demand in terms of the belt acceleration:

$$\tau_{\text{load}} + \left[I_{s,F} + I_M - \frac{I_M^2 \left(\frac{d\theta_s}{ds} \right)^2}{M_{\text{shift}}} \right] \left(\frac{\dot{v}_{b,\text{ns}} - \dot{r}_s \omega_s}{r_s} \right) - I_M \frac{d^2 \theta_s}{ds^2} \dot{s}^2$$

$$\tau_{s,\text{ns}} = \frac{- \frac{I_M}{M_{\text{shift}}} \frac{d\theta_s}{ds} \left[F_{p,\text{ax}} + F_{c,p} - F_{c,s} - k_{s,x}(x_{s,0} + s) - \frac{d\theta_s}{ds} k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \frac{d\theta_s}{ds} \frac{d^2 \theta_s}{ds^2} \dot{s}^2 \right]}{1 - \frac{I_M \left(\frac{d\theta_s}{ds} \right)^2}{2M_{\text{shift}}}}. \quad (3.4.11)$$

This expression is longer than the primary torque demand because the secondary torque is coupled through the helix to both secondary rotation and axial shift.

Explicit No-Slip Belt Acceleration

The belt transport equation is

$$m_b \dot{v}_b = \frac{\tau_p}{r_p} - \frac{\tau_s}{r_s}.$$

Substituting Equation (3.4.7) and Equation (3.4.11), then collecting terms in $\dot{v}_{b,\text{ns}}$, gives the explicit no-slip belt acceleration:

No-Slip Belt Acceleration

(3.4.12)

$$\dot{v}_{b,ns} = \frac{\frac{\tau_{eng}}{r_p} + \frac{I_p \dot{r}_p \omega_p}{r_p^2} - \tau_{load} - \left[I_{s,F} + I_M - \frac{I_M^2 \left(\frac{d\theta_s}{ds} \right)^2}{M_{shift}} \right] \frac{\dot{r}_s \omega_s}{r_s} - I_M \frac{d^2 \theta_s}{ds^2} \dot{s}^2 - \frac{1}{r_s} \frac{I_M \frac{d\theta_s}{ds}}{M_{shift}} \left[F_{p,ax} + F_{c,p} - F_{c,s} - k_{s,x}(x_{s,0} + s) - \frac{d\theta_s}{ds} k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \frac{d\theta_s}{ds} \frac{d^2 \theta_s}{ds^2} \dot{s}^2 \right]}{m_b + \frac{I_p}{r_p^2} + \frac{1}{r_s} \frac{\left[I_{s,F} + I_M - \frac{I_M^2 \left(\frac{d\theta_s}{ds} \right)^2}{M_{shift}} \right] \frac{1}{r_s}}{1 - \frac{I_M \left(\frac{d\theta_s}{ds} \right)^2}{2M_{shift}}}}$$

This equation contains only quantities known from the current state, evaluated geometry, force models, and inertial parameters. It therefore determines the belt acceleration required by the no-slip candidate.

Recovered No-Slip Accelerations and Candidate Torques

Once $\dot{v}_{b,ns}$ has been computed from Equation (3.4.12), the remaining no-slip quantities follow in direct order.

The pulley angular accelerations are

$$\dot{\omega}_{p,ns} = \frac{\dot{v}_{b,ns} - \dot{r}_p \omega_p}{r_p}, \quad (3.4.13)$$

and

$$\dot{\omega}_{s,ns} = \frac{\dot{v}_{b,ns} - \dot{r}_s \omega_s}{r_s}. \quad (3.4.14)$$

The primary torque candidate is

Primary No-Slip Torque Demand**(3.4.15)**

$$\tau_{p,ns} = \tau_{eng} - I_p \left(\frac{\dot{v}_{b,ns} - \dot{r}_p \omega_p}{r_p} \right)$$

The secondary torque candidate is

Secondary No-Slip Torque Demand**(3.4.16)**

$$\tau_{s,ns} = \frac{\tau_{load} + \left[I_{s,F} + I_M - \frac{I_M^2 \left(\frac{d\theta_s}{ds} \right)^2}{M_{shift}} \right] \left(\frac{\dot{v}_{b,ns} - \dot{r}_s \omega_s}{r_s} \right) - I_M \frac{d^2 \theta_s}{ds^2} \dot{s}^2 - \frac{I_M \frac{d\theta_s}{ds}}{M_{shift}} \left[F_{p,ax} + F_{c,p} - F_{c,s} - k_{s,x}(x_{s,0} + s) - \frac{d\theta_s}{ds} k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \frac{d\theta_s}{ds} \frac{d^2 \theta_s}{ds^2} \dot{s}^2 \right]}{1 - \frac{I_M \left(\frac{d\theta_s}{ds} \right)^2}{2M_{shift}}}$$

Finally, the no-slip shift acceleration is obtained from the axial shift equation:

No-Slip Shift Acceleration**(3.4.17)**

$$\ddot{s}_{ns} = \frac{F_{p,ax} + F_{c,p} - F_{c,s} - k_{s,x}(x_{s,0} + s) - \frac{d\theta_s}{ds} \left[\frac{\tau_{s,ns}}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left(\dot{\omega}_{s,ns} - \frac{d^2 \theta_s}{ds^2} \dot{s}^2 \right) \right]}{M_{shift}}$$

Together, these equations explicitly determine the no-slip candidate:

$$\dot{v}_{b,ns}, \quad \dot{\omega}_{p,ns}, \quad \dot{\omega}_{s,ns}, \quad \tau_{p,ns}, \quad \tau_{s,ns}, \quad \ddot{s}_{ns}.$$

If both belt–pulley contacts were guaranteed to remain stuck, these equations would close the CVT dynamics. In that idealized case, the belt would act as a kinematic constraint between the two pulleys while the shift coordinate changes the effective ratio.

For a frictional belt drive, however, the required no-slip torques must still be checked against the available traction capacity.

3.4.3 Transition to Traction Limits

The no-slip candidate answers one question: what accelerations and contact torques are required if the belt remains stuck to both pulleys? It does not yet answer whether the contacts can physically support those torques.

The next section derives the tangential traction limits for the primary and secondary belt–pulley contacts. The candidate torques $\tau_{p,ns}$ and $\tau_{s,ns}$ can then be compared with those limits. If both

contact torques are admissible, the no-slip candidate is used. If either required torque exceeds the available traction capacity, the corresponding sticking constraint is replaced by a slip relation.

3.5 Traction Limits and Slip Conditions

The previous section derived the no-slip candidate, including the contact torque demands $\tau_{p,ns}$ and $\tau_{s,ns}$. These are the torques that the belt–pulley interfaces would have to exchange if the belt remained grossly stuck to both pulleys.

Those torque demands are not automatically attainable. Torque is transmitted through frictional traction between the belt and the sheave faces, and that traction is limited by the normal load generated by axial clamping. Therefore, each belt–pulley contact can support only a finite contact torque before gross slip must occur.

The purpose of this section is to derive the traction checks used to decide whether the no-slip candidate is admissible. The important distinction is that the dynamic variables τ_p and τ_s are treated as contact torques, not as tight–slack span-tension differences. The corresponding span tension change can still be reconstructed after the contact torque is known, but the stick/slip admissibility check is posed directly in terms of frictional contact torque.

3.5.1 Contact-Torque Capacity

The same traction argument applies to both pulleys. Let

$$j \in \{p, s\},$$

where $j = p$ denotes the primary pulley and $j = s$ denotes the secondary pulley. At pulley j , the belt–pulley contact is represented by an effective torque radius $r_{j,\text{eff}}$. The signed contact torque at that pulley is denoted τ_j .

Under **Assumption 4 (Idealized Belt–Pulley Friction Law)** and **Assumption 5 (Constant Effective Friction Coefficient)**, the belt–pulley interface obeys a Coulomb friction law with constant coefficient μ . Under **Assumption 7 (Gross Tangential Traction Approximation)**, the available friction is resolved in the gross tangential torque-transfer direction. Thus, at the differential level,

$$|dF_{t,j}| \leq \mu dN_j, \tag{3.5.1}$$

where $dF_{t,j}$ is the tangential contact force and dN_j is the local normal load.

Integrating over the wrap gives the bound on total tangential contact force,

$$|F_{t,j}| \leq \mu N_{\phi,j}, \tag{3.5.2}$$

where

$$N_{\phi,j} \equiv \int_{\text{wrap}} dN_j \tag{3.5.3}$$

is the total normal load carried by the belt–pulley contact on pulley j .

The corresponding contact torque magnitude is

$$|\tau_j| = r_{j,\text{eff}} |F_{t,j}|. \quad (3.5.4)$$

Therefore, for a prescribed normal load, the maximum gross contact torque that can be supported without slip is

Gross Contact-Torque Capacity (3.5.5) $\tau_j \leq r_{j,\text{eff}} \mu N_{\phi,j}$
--

This is the contact-torque capacity used for stick/slip admissibility. It bounds the torque exchanged directly at the belt–pulley interface.

Remark (Contact Torque Versus Span Tension)

The contact torque τ_j should not be confused with the torque-equivalent of the tight–slack tension difference across the wrap. During transient motion, some contact traction may be used to accelerate belt material on the wrap, so the contact force and the span tension rise need not be equal. The present model uses contact torque as the dynamic coupling variable. A span-tension reconstruction is given in ??, but it is not used as the primary stick/slip admissibility condition.

Remark (Other Friction Models)

Although the present simulator adopts a Coulomb friction law for simplicity and analytic transparency, richer friction descriptions are available if greater fidelity near the stick–slip transition is desired. A common next step is a Stribeck-type law, in which the effective friction level varies with relative slip speed so that breakaway friction near zero speed can exceed the kinetic friction observed at larger slip speeds. Such a model can better represent engagement and low-slip behaviour than a purely constant Coulomb coefficient, while still remaining relatively simple to implement [Armstrong-H'elouvry et al. \(1994\)](#); [Canudas de Wit et al. \(1995\)](#).

For still higher fidelity, dynamic friction models introduce internal state variables that represent the evolving contact condition. The LuGre model is a standard example and can capture presliding displacement, hysteresis, friction lag, and smoother stick–slip transitions, while related multistate models such as the generalized Maxwell–slip model can represent more detailed microslip and memory effects [Canudas de Wit et al. \(1995\)](#); [Al-Bender et al. \(2005\)](#). These models are often more physically expressive, but they also require additional parameter identification and increase numerical and modelling complexity. For the present work, Coulomb friction is therefore retained as a deliberate low-complexity approximation, while Stribeck- or state-based friction models remain natural extensions for future refinement [Armstrong-H'elouvry et al. \(1994\)](#).

3.5.2 Normal Force from Axial Clamping

The torque capacity in Equation (3.5.5) depends on the total normal load $N_{\phi,j}$. We now express that normal load in terms of the axial clamping force generated by pulley j .

The belt is pressed between two opposing conical sheaves. The two inclined faces apply a net radial normal load on the belt determined by the axial clamp. Using the groove geometry from Equation (3.2.39),

$$F_{\text{rad},j} = 2F_{\text{ax},j} \tan \beta. \quad (3.5.6)$$

The radial load in Equation (3.5.6) represents the total inward force applied by the sheave faces onto the belt. This load is carried by the distributed normal contact forces along the wrap, so

$$N_{\phi,j} = F_{\text{rad},j}. \quad (3.5.7)$$

Only compressive axial clamp can create normal load. To prevent an unphysical negative traction capacity, define the compressive part of any axial force as

$$\langle F \rangle_+ = \max(F, 0). \quad (3.5.8)$$

Therefore,

Wrap-Normal Load from Axial Clamp	(3.5.9)
$N_{\phi,j} = 2 \langle F_{\text{ax},j} \rangle_+ \tan \beta$	

Substituting Equation (3.5.9) into Equation (3.5.5) gives the gross contact-torque capacity

Pulley Contact-Torque Capacity	(3.5.10)
$ \tau_j \leq 2r_{j,\text{eff}} \mu \langle F_{\text{ax},j} \rangle_+ \tan \beta$	

For a prescribed axial clamp, this bound is symmetric in positive and negative contact torque. However, the admissible torque range of a complete pulley mechanism may still be asymmetric if the axial clamp itself depends on the signed contact torque. This distinction is important for the torque-reactive secondary pulley.

Remark (Wrap Angle in the Reduced Capacity Model)

The wrap angle does not appear explicitly in Equation (3.5.10) because $N_{\phi,j}$ is the total integrated normal load imposed by the clamp. Under the averaged-contact approximation, increasing wrap angle spreads this same integrated normal load over more contact length rather than increasing the total available gross friction force. Wrap angle still matters for local contact pressure, heat, wear, pressure distribution, and span-tension reconstruction, but it is not an independent multiplier in the reduced gross contact-torque capacity.

3.5.3 Primary Pulley No-Slip Admissibility

The generic contact-torque capacity law can now be specialized to the primary pulley. At this stage, the goal is only to test whether the primary contact torque demanded by the no-slip candidate can be supported by the available primary traction.

For compactness, write

$$r_p = r_{p,\text{eff}}(s).$$

The primary axial force is known explicitly from [Equation \(3.2.10\)](#):

$$F_{\text{ax},p}(s, \omega_p) = m_f \omega_p^2 (r_{f,0} + r_f(s)) \frac{dr_f}{ds} - k_p(x_{p,0} + s). \quad (3.5.11)$$

Using the static friction coefficient μ_s , the primary no-slip contact is admissible if

Primary No-Slip Admissibility (3.5.12) $ \tau_{p,\text{ns}} \leq 2r_p \mu_s \langle F_{\text{ax},p}(s, \omega_p) \rangle_+ \tan \beta$

This condition is symmetric in positive and negative primary contact torque because the primary axial force does not depend on the signed primary torque. If [Equation \(3.5.12\)](#) is satisfied, the primary contact can support the torque required by the no-slip candidate. If it is not satisfied, the primary contact cannot remain grossly stuck under the demanded contact torque.

3.5.4 Secondary Pulley No-Slip Admissibility

The secondary pulley follows the same contact-torque capacity law as the primary, but with one important difference: the secondary axial clamp is torque-reactive. Through the helix, the same signed secondary contact torque being checked for admissibility also contributes to the axial force that generates the available traction.

To keep this dependence explicit, write the secondary axial force as the function

$$F_{\text{ax},s}(s, \dot{s}, \tau_s, \dot{\omega}_s, \ddot{s}) = k_{s,x}(x_{s,0} + s) + \frac{d\theta_s}{ds} \left[\frac{\tau_s}{2} + k_{s,\theta}(\theta_{s,0} + \theta_s(s)) - I_M \left(\dot{\omega}_s - \frac{d^2\theta_s}{ds^2} \dot{s}^2 - \frac{d\theta_s}{ds} \ddot{s} \right) \right]. \quad (3.5.13)$$

For compactness, write

$$r_s = r_{s,\text{eff}}(s).$$

On the no-slip candidate branch, the quantities $\tau_{s,\text{ns}}$, $\dot{\omega}_{s,\text{ns}}$, and $\ddot{s}_{\text{ns}}$ have already been determined by the no-slip solve. Therefore, the secondary clamp used in the traction check is evaluated at the candidate values:

$$F_{\text{ax},s}^{\text{ns}} = F_{\text{ax},s}(s, \dot{s}, \tau_{s,\text{ns}}, \dot{\omega}_{s,\text{ns}}, \ddot{s}_{\text{ns}}).$$

Using the static friction coefficient μ_s , the secondary no-slip contact is admissible if

$$\text{Secondary No-Slip Admissibility} \tag{3.5.14}$$

$$|\tau_{s,\text{ns}}| \leq 2r_s \mu_s \langle F_{\text{ax},s}(s, \dot{s}, \tau_{s,\text{ns}}, \dot{\omega}_{s,\text{ns}}, \ddot{s}_{\text{ns}}) \rangle_+ \tan \beta$$

This condition is written as a magnitude check, but it is not assuming a symmetric secondary torque range. The axial force inside the right-hand side is evaluated using the signed no-slip torque $\tau_{s,\text{ns}}$. Therefore, positive and negative secondary torques of equal magnitude generally produce different clamp forces and different available traction. The condition above is a pointwise admissibility test: it asks whether the specific signed no-slip candidate torque creates enough clamp to support itself.

If Equation (3.5.14) is satisfied, the secondary contact can support the torque required by the no-slip candidate. If it is not satisfied, the secondary contact cannot remain grossly stuck under the demanded contact torque.

Remark (Optional Secondary Torque Envelope)

For branch selection, the pointwise check in Equation (3.5.14) is sufficient because the no-slip solve has already produced a specific value of $\tau_{s,\text{ns}}$. However, it can also be useful to reconstruct the full secondary torque envelope at a fixed instantaneous state, for example when plotting how the torque-reactive helix changes the available torque range.

At a fixed state, the secondary stick envelope is the set of torques satisfying

$$|\tau_s| \leq 2r_s \mu_s \langle F_{\text{ax},s}(s, \dot{s}, \tau_s, \dot{\omega}_s, \ddot{s}) \rangle_+ \tan \beta. \tag{3.5.15}$$

Because $F_{\text{ax},s}$ contains the signed torque τ_s , the set defined by Equation (3.5.15) is generally not symmetric about zero. One torque direction may increase clamp through the helix, while the opposite direction may reduce clamp. This envelope is useful for diagnostic plots or design interpretation, but the branch-selection logic only needs the pointwise candidate check in Equation (3.5.14).

3.5.5 Admissibility of the No-Slip Candidate

The full no-slip candidate is admissible only if both pulley contacts satisfy their static traction checks:

$$|\tau_{p,\text{ns}}| \leq 2r_p \mu_s \langle F_{\text{ax},p}(s, \omega_p) \rangle_+ \tan \beta, \tag{3.5.16}$$

and

$$|\tau_{s,\text{ns}}| \leq 2r_s \mu_s \langle F_{\text{ax},s}(s, \dot{s}, \tau_{s,\text{ns}}, \dot{\omega}_{s,\text{ns}}, \ddot{s}_{\text{ns}}) \rangle_+ \tan \beta. \tag{3.5.17}$$

When both conditions hold, the no-slip candidate can be accepted as the contact state for that instant. If either condition fails, at least one contact cannot maintain gross sticking and the corresponding contact relation must be replaced by a slip relation.

3.5.6 Kinetic Traction Bound for Slipping Contacts

The same contact-torque capacity structure is used when a contact is sliding, but the kinetic friction coefficient μ_k replaces the static coefficient μ_s . Thus, the magnitude of the slipping contact torque at pulley j is

Kinetic Contact-Torque Magnitude	(3.5.18)
$ \tau_{j,\text{slip}} = 2r_{j,\text{eff}}\mu_k \langle F_{\text{ax},j} \rangle_+ \tan \beta$	

The sign of the kinetic torque is chosen so that the friction force opposes the relative sliding motion between the belt and pulley surface. The exact sign convention for τ_p and τ_s is applied in the contact-state selection section, where the primary and secondary slip branches are written explicitly.

3.5.7 Section Conclusion and Transition

This section derived the traction checks needed to test the no-slip candidate from [Section 3.4.2](#). The stick/slip admissibility check was posed directly in terms of contact torque because the rotational and belt transport equations use τ_p and τ_s as the torques exchanged at the belt–pulley contacts.

The primary check is symmetric because the primary axial force is independent of the signed primary contact torque. The secondary check is not generally symmetric in torque because the helix makes the secondary axial clamp depend on the signed secondary contact torque. For branch selection, this is handled by evaluating the secondary clamp directly on the signed no-slip candidate.

If both pulley contacts satisfy their admissibility conditions, the no-slip candidate is accepted. If one or both contacts cannot support their demanded contact torques, the corresponding contact must be described by a slipping traction law. The next section develops the contact-state selection rules and the resulting slip-branch dynamics.

3.6 Slip Branch Dynamics and Contact-State Selection

The previous section determined when the no-slip torque demands can be supported by the available belt–pulley traction. If the primary and secondary contacts both satisfy their admissibility conditions, the no-slip candidate is physically consistent and the belt remains adhered to both pulleys.

When one of these admissibility conditions fails, the no-slip candidate can no longer be used as the final torque-transfer law. The contact that exceeds its available traction cannot supply the demanded torque while remaining stuck, so relative motion begins at that belt–pulley interface. Once this occurs, the contact torque is no longer determined by the no-slip demand. Instead, it is set by the kinetic traction available at the slipping contact.

This section develops the rules used to select the active contact state and the corresponding equations of motion. The same three bodies introduced in [Section 3.3.1](#) are retained: the primary pulley, the belt, and the secondary pulley. What changes from one branch to another is the contact condition

imposed at each pulley. A stuck contact enforces belt-speed compatibility, while a slipping contact applies a saturated kinetic traction torque in the direction opposing relative motion.

The goal is therefore to complete the torque-transfer closure. We first define the relative belt–pulley speeds used to identify sliding, then state the rules for entering, maintaining, and exiting slip. The remaining subsections derive the branch dynamics for primary slip, secondary slip, and simultaneous slip at both contacts.

3.6.1 Relative Contact Speeds and Slip-State Logic

To determine whether a belt–pulley contact is sticking or slipping, the model compares the belt transport speed to the local surface speed imposed by each pulley.

For the primary pulley, define the relative contact speed as

$$v_{\text{rel},p} = r_p \omega_p - v_b, \quad (3.6.1)$$

where $r_p = r_{p,\text{eff}}(s)$. Thus, $v_{\text{rel},p} > 0$ means the primary pulley surface is moving faster than the belt at the contact radius and tends to drive the belt forward.

For the secondary pulley, define

$$v_{\text{rel},s} = v_b - r_s \omega_s, \quad (3.6.2)$$

where $r_s = r_{s,\text{eff}}(s)$. Thus, $v_{\text{rel},s} > 0$ means the belt is moving faster than the secondary pulley surface and tends to drive the secondary forward.

These definitions are chosen so that positive relative speed corresponds to the usual forward torque-transfer direction at each contact: primary-to-belt on the primary side, and belt-to-secondary on the secondary side.

A contact can remain stuck only if its relative contact speed is zero, or within a small numerical tolerance:

$$|v_{\text{rel},j}| \leq \varepsilon_v, \quad j \in \{p, s\}. \quad (3.6.3)$$

If both contacts satisfy [Equation \(3.6.3\)](#), the model first tests the no-slip candidate derived in [??](#). This candidate is accepted only if both pulley contacts also satisfy the traction admissibility conditions derived in [Section 3.5](#):

$$|\tau_{p,\text{ns}}| \leq \tau_{p,\text{max}}^{\text{stick}} \quad (3.6.4)$$

and

$$\tau_{s,-}^{\text{stick}} \leq \tau_{s,\text{ns}} \leq \tau_{s,+}^{\text{stick}}. \quad (3.6.5)$$

If these conditions hold, the no-slip candidate becomes the active torque-transfer branch:

$$\tau_p = \tau_{p,\text{ns}}, \quad \tau_s = \tau_{s,\text{ns}}, \quad \dot{v}_b = \dot{v}_{b,\text{ns}}.$$

If either contact fails its admissibility check, that contact cannot support the required no-slip torque and must enter slip. The direction of slip is determined by the direction in which the demanded torque exceeds the admissible interval. For the primary pulley,

$$\tau_{p,\text{ns}} > \tau_{p,\text{max}}^{\text{stick}} \Rightarrow \text{positive primary slip,}$$

while

$$\tau_{p,ns} < -\tau_{p,max}^{stick} \Rightarrow \text{negative primary slip.}$$

For the secondary pulley,

$$\tau_{s,ns} > \tau_{s,+}^{stick} \Rightarrow \text{positive secondary slip,}$$

while

$$\tau_{s,ns} < \tau_{s,-}^{stick} \Rightarrow \text{negative secondary slip.}$$

Once a contact is already sliding, its state is determined primarily by its relative contact speed. If

$$|v_{rel,j}| > \varepsilon_v,$$

then contact j is treated as slipping, and its torque is set by kinetic traction rather than by the no-slip demand. The slip direction is recorded by

$$\sigma_j = \text{sgn}(v_{rel,j}), \quad j \in \{p, s\}. \quad (3.6.6)$$

Slip persists while the relative contact speed remains nonzero. During this time, the slipping contact applies a saturated kinetic traction torque in the direction opposing relative motion. The no-slip candidate is not reaccepted until the relative speed returns to the sticking tolerance and the static admissibility conditions can again be satisfied.

This gives three possible slipping branches:

- primary slip, where the primary contact slides and the secondary contact remains stuck;
- secondary slip, where the secondary contact slides and the primary contact remains stuck;
- two-contact slip, where both pulley contacts slide simultaneously.

The following subsections derive the equations of motion for each branch.

Remark (Power Flow During Slip)

In the no-slip branch, belt-speed compatibility constrains the primary pulley, belt, and secondary pulley to move together kinematically. Once slip occurs, that compatibility is lost at the slipping contact. The contact torque is then limited by kinetic traction, while the pulley and belt speeds evolve according to their own equations of motion.

As a result, the instantaneous mechanical power at the primary contact, $\tau_p \omega_p$, does not need to match the instantaneous mechanical power at the secondary contact, $\tau_s \omega_s$. The difference is associated with changes in stored kinetic energy of the rotating components and belt, together with slip dissipation. Thus, an apparent short-term excess of output-side power does not imply energy creation; it reflects energy being drawn from inertia while the slipping contact breaks the ideal no-slip power constraint.

3.6.2 Kinetic Traction Law for a Slipping Contact

Once a belt–pulley contact is slipping, the torque at that contact is no longer determined by the no-slip torque demand. Instead, the contact applies the largest kinetic traction torque available in the direction opposing relative motion.

The generic torque-capacity expression from Equation (3.5.10) still applies, but the static coefficient μ_s is replaced by the kinetic coefficient μ_k . For a slipping contact on pulley $j \in \{p, s\}$, define

$$\tau_{j,\max}^{\text{slip}}(\dot{v}_b) = r_j [2\mu_k F_{\text{ax},j} \tan \beta - \rho_b A_b \phi_j (r_{j,\text{cm}} \dot{v}_b + \dot{r}_{j,\text{cm}} v_b)], \quad (3.6.7)$$

where $r_j = r_{j,\text{eff}}(s)$. The notation $\tau_{j,\max}^{\text{slip}}(\dot{v}_b)$ emphasizes that the available slipping torque is not generally a fixed number; it depends on the belt acceleration through the inertial correction term.

The direction of the slipping torque is determined by the relative contact speed defined in Section 3.6.1. Let

$$\sigma_j = \text{sgn}(v_{\text{rel},j}), \quad j \in \{p, s\}. \quad (3.6.8)$$

With the relative-speed definitions adopted in Equation (3.6.1) and Equation (3.6.2), $\sigma_j > 0$ corresponds to the usual forward torque-transfer direction at contact j . The slipping contact torque is then modeled as the saturated kinetic traction torque

$$\tau_j = \sigma_j \tau_{j,\max}^{\text{slip}}(\dot{v}_b). \quad (3.6.9)$$

Equation (3.6.9) should not be interpreted as a completed solution for τ_j , because the right-hand side still contains $\dot{v}_b$. In a slip branch, the belt acceleration must be solved simultaneously with the saturated contact torque using the belt equation of motion Equation (3.3.14). The following subsections carry out this solve for primary slip, secondary slip, and simultaneous slip at both contacts.

3.6.3 Primary-Slip Branch

We first consider the branch where the primary contact is slipping while the secondary contact remains stuck. In this case, the primary pulley no longer enforces belt-speed compatibility. Instead, the primary contact torque is set by the saturated kinetic traction law from Section 3.6.2.

The secondary contact, however, is still adhered. Therefore, the secondary pulley remains kinematically compatible with the belt:

$$\dot{\omega}_s = \frac{\dot{v}_b - \dot{r}_s \omega_s}{r_s}, \quad (3.6.10)$$

Using the secondary rotational equation of motion Equation (3.3.16), the secondary contact torque is then

$$\tau_s = \tau_{\text{load}} + I_s \left(\frac{\dot{v}_b - \dot{r}_s \omega_s}{r_s} \right). \quad (3.6.11)$$

At the slipping primary contact, let

$$\sigma_p = \text{sgn}(v_{\text{rel},p}).$$

Applying Equation (3.6.9) with $j = p$ gives

$$\tau_p = \sigma_p r_p [2\mu_k F_{\text{ax},p} \tan \beta - \rho_b A_b \phi_p (r_{p,\text{cm}} \dot{v}_b + \dot{r}_{p,\text{cm}} v_b)], \quad (3.6.12)$$

where $r_p = r_{p,\text{eff}}(s)$.

The remaining unknown is the belt acceleration $\dot{v}_b$. This is found by substituting Equation (3.6.11) and Equation (3.6.12) into the belt equation of motion Equation (3.3.14):

$$m_b \dot{v}_b = \frac{\tau_p}{r_p} - \frac{\tau_s}{r_s}. \quad (3.6.13)$$

Substituting gives

$$m_b \dot{v}_b = \sigma_p [2\mu_k F_{ax,p} \tan \beta - \rho_b A_b \phi_p (r_{p,cm} \dot{v}_b + \dot{r}_{p,cm} v_b)] - \frac{\tau_{load}}{r_s} - \frac{I_s}{r_s} \left(\frac{\dot{v}_b - \dot{r}_s \omega_s}{r_s} \right). \quad (3.6.14)$$

Collecting the $\dot{v}_b$ terms yields the primary-slip belt acceleration:

Primary-Slip Belt Acceleration (3.6.15) $\dot{v}_{b,p\text{-slip}} = \frac{\sigma_p [2\mu_k F_{ax,p} \tan \beta - \rho_b A_b \phi_p \dot{r}_{p,cm} v_b] - \frac{\tau_{load}}{r_s} + \frac{I_s \dot{r}_s \omega_s}{r_s^2}}{m_b + \sigma_p \rho_b A_b \phi_p r_{p,cm} + \frac{I_s}{r_s^2}}$
--

Once $\dot{v}_{b,p\text{-slip}}$ is known, the branch torques follow by substitution into Equation (3.6.12) and Equation (3.6.11). The pulley accelerations are then

$$\dot{\omega}_p = \frac{\tau_{eng} - \tau_p}{I_p}, \quad (3.6.16)$$

and

$$\dot{\omega}_s = \frac{\dot{v}_{b,p\text{-slip}} - \dot{r}_s \omega_s}{r_s}. \quad (3.6.17)$$

Thus, in the primary-slip branch, the primary contact torque is set by kinetic traction, the secondary contact still enforces belt-speed compatibility, and the belt equation of motion determines the resulting belt acceleration. This branch remains valid only while the secondary contact can remain adhered. If the secondary contact also fails its sticking condition, the model must transition to the two-contact slip branch.

3.6.4 Secondary-Slip Branch

We next consider the branch where the secondary contact is slipping while the primary contact remains stuck. In this case, the secondary contact torque is set by saturated kinetic traction, while the primary contact still enforces belt-speed compatibility.

The primary contact remains adhered, so the primary pulley must satisfy

$$\dot{\omega}_p = \frac{\dot{v}_b - \dot{r}_p \omega_p}{r_p}, \quad (3.6.18)$$

where $r_p = r_{p,\text{eff}}(s)$. Using the primary rotational equation of motion [Equation \(3.3.13\)](#), the primary contact torque is therefore

$$\tau_p = \tau_{\text{eng}} - I_p \left(\frac{\dot{v}_b - \dot{r}_p \omega_p}{r_p} \right). \quad (3.6.19)$$

At the slipping secondary contact, let

$$\sigma_s = \text{sgn}(v_{\text{rel},s}).$$

Applying [Equation \(3.6.9\)](#) with $j = s$ gives

$$\tau_s = \sigma_s r_s [2\mu_k F_{\text{ax},s}(s, \tau_s) \tan \beta - \rho_b A_b \phi_s (r_{s,\text{cm}} \dot{v}_b + \dot{r}_{s,\text{cm}} v_b)], \quad (3.6.20)$$

where $r_s = r_{s,\text{eff}}(s)$.

Unlike the primary slip branch, this expression is implicit in τ_s because the secondary axial force is torque-reactive. Substituting the secondary axial force model from [Equation \(3.2.26\)](#) gives

$$\begin{aligned} \tau_s = \sigma_s r_s \left[\mu_k \tan \beta (\tau_s + k_{s,\theta}(\theta_{s,0} + \theta_s(s))) \frac{d\theta_s}{ds} \right. \\ \left. + 2\mu_k \tan \beta k_{s,x}(x_{s,0} + s) - \rho_b A_b \phi_s (r_{s,\text{cm}} \dot{v}_b + \dot{r}_{s,\text{cm}} v_b) \right]. \end{aligned} \quad (3.6.21)$$

Collecting the τ_s terms gives

$$\tau_s = \frac{\sigma_s r_s \left[\mu_k \tan \beta k_{s,\theta}(\theta_{s,0} + \theta_s(s)) \frac{d\theta_s}{ds} + 2\mu_k \tan \beta k_{s,x}(x_{s,0} + s) - \rho_b A_b \phi_s (r_{s,\text{cm}} \dot{v}_b + \dot{r}_{s,\text{cm}} v_b) \right]}{1 - \sigma_s r_s \mu_k \tan \beta \frac{d\theta_s}{ds}}. \quad (3.6.22)$$

The remaining unknown is the belt acceleration $\dot{v}_b$. Substituting [Equation \(3.6.19\)](#) and [Equation \(3.6.22\)](#) into the belt equation of motion [Equation \(3.3.14\)](#),

$$m_b \dot{v}_b = \frac{\tau_p}{r_p} - \frac{\tau_s}{r_s},$$

and collecting the $\dot{v}_b$ terms gives the secondary-slip belt acceleration:

Secondary-Slip Belt Acceleration

(3.6.23)

$$\dot{v}_{b,s-\text{slip}} = \frac{\frac{\tau_{\text{eng}}}{r_p} + \frac{I_p \dot{r}_p \omega_p}{r_p^2} - \frac{\sigma_s \left[\mu_k \tan \beta k_{s,\theta}(\theta_{s,0} + \theta_s(s)) \frac{d\theta_s}{ds} + 2\mu_k \tan \beta k_{s,x}(x_{s,0} + s) - \rho_b A_b \phi_s \dot{r}_{s,\text{cm}} v_b \right]}{1 - \sigma_s r_s \mu_k \tan \beta \frac{d\theta_s}{ds}}}{m_b + \frac{I_p}{r_p^2} - \frac{\sigma_s \rho_b A_b \phi_s r_{s,\text{cm}}}{1 - \sigma_s r_s \mu_k \tan \beta \frac{d\theta_s}{ds}}}$$

Once $\dot{v}_{b,s-\text{slip}}$ is known, the branch torques follow by substitution into [Equation \(3.6.19\)](#) and [Equation \(3.6.22\)](#). The pulley accelerations are then

$$\dot{\omega}_p = \frac{\dot{v}_{b,s-\text{slip}} - \dot{r}_p \omega_p}{r_p}, \quad (3.6.24)$$

and

$$\dot{\omega}_s = \frac{\tau_s - \tau_{\text{load}}}{I_s}. \quad (3.6.25)$$

Thus, in the secondary-slip branch, the secondary contact torque is set by kinetic traction, including the torque-reactive helix feedback, while the primary contact still enforces belt-speed compatibility. This branch remains valid only while the primary contact can remain adhered. If the primary contact also fails its sticking condition, the model must transition to the two-contact slip branch.

3.6.5 Two-Contact Slip Branch

Finally, consider the branch where both belt-pulley contacts are slipping. In this case, neither pulley enforces belt-speed compatibility. Both contact torques are instead determined by saturated kinetic traction, and the belt acceleration is obtained directly from the belt equation of motion.

Let

$$\sigma_p = \text{sgn}(v_{\text{rel},p}), \quad \sigma_s = \text{sgn}(v_{\text{rel},s}).$$

At the primary contact, applying [Equation \(3.6.9\)](#) with $j = p$ gives

$$\tau_p = \sigma_p r_p [2\mu_k F_{\text{ax},p} \tan \beta - \rho_b A_b \phi_p (r_{p,\text{cm}} \dot{v}_b + \dot{r}_{p,\text{cm}} v_b)], \quad (3.6.26)$$

where $r_p = r_{p,\text{eff}}(s)$.

At the secondary contact, applying [Equation \(3.6.9\)](#) with $j = s$ gives

$$\tau_s = \sigma_s r_s [2\mu_k F_{\text{ax},s}(s, \tau_s) \tan \beta - \rho_b A_b \phi_s (r_{s,\text{cm}} \dot{v}_b + \dot{r}_{s,\text{cm}} v_b)], \quad (3.6.27)$$

where $r_s = r_{s,\text{eff}}(s)$. As in [Section 3.6.4](#), the secondary expression is implicit because the secondary axial force is torque-reactive. Substituting [Equation \(3.2.26\)](#) and collecting the τ_s terms gives

$$\tau_s = \frac{\sigma_s r_s \left[\mu_k \tan \beta k_{s,\theta} (\theta_{s,0} + \theta_s(s)) \frac{d\theta_s}{ds} + 2\mu_k \tan \beta k_{s,x} (x_{s,0} + s) - \rho_b A_b \phi_s (r_{s,\text{cm}} \dot{v}_b + \dot{r}_{s,\text{cm}} v_b) \right]}{1 - \sigma_s r_s \mu_k \tan \beta \frac{d\theta_s}{ds}}. \quad (3.6.28)$$

The belt equation of motion is still

$$m_b \dot{v}_b = \frac{\tau_p}{r_p} - \frac{\tau_s}{r_s}.$$

Substituting Equation (3.6.26) and Equation (3.6.28), then collecting the $\dot{v}_b$ terms, gives the two-contact-slip belt acceleration:

Two-Contact-Slip Belt Acceleration (3.6.29)

$$\dot{v}_{b,ps\text{-slip}} = \frac{\sigma_p [2\mu_k F_{ax,p} \tan \beta - \rho_b A_b \phi_p \dot{r}_{p,cm} v_b] - \frac{\sigma_s \left[\mu_k \tan \beta k_{s,\theta} (\theta_{s,0} + \theta_s(s)) \frac{d\theta_s}{ds} + 2\mu_k \tan \beta k_{s,x} (x_{s,0} + s) - \rho_b A_b \phi_s \dot{r}_{s,cm} v_b \right]}{1 - \sigma_s r_s \mu_k \tan \beta \frac{d\theta_s}{ds}}}{m_b + \sigma_p \rho_b A_b \phi_p r_{p,cm} - \frac{\sigma_s \rho_b A_b \phi_s r_{s,cm}}{1 - \sigma_s r_s \mu_k \tan \beta \frac{d\theta_s}{ds}}}$$

Once $\dot{v}_{b,ps\text{-slip}}$ is known, the branch torques follow by substitution into Equation (3.6.26) and Equation (3.6.28). Since neither contact is adhered, the pulley accelerations are obtained directly from the rotational equations of motion:

$$\dot{\omega}_p = \frac{\tau_{\text{eng}} - \tau_p}{I_p}, \quad (3.6.30)$$

and

$$\dot{\omega}_s = \frac{\tau_s - \tau_{\text{load}}}{I_s}. \quad (3.6.31)$$

Thus, in the two-contact slip branch, both pulley contacts are governed by kinetic traction, and the belt is not kinematically constrained to either pulley. The belt acceleration is determined only by the balance of the two saturated contact torques through the belt equation of motion.

3.6.6 Contact-State Selection

The preceding subsections define the possible torque-transfer closures. The active branch is selected by checking which contacts can remain adhered.

Let the primary sticking condition be

$$\mathcal{S}_p \equiv (|v_{\text{rel},p}| \leq \varepsilon_v) \wedge \left(|\tau_{p,ns}| \leq \tau_{p,\text{max}}^{\text{stick}} \right),$$

and let the secondary sticking condition be

$$\mathcal{S}_s \equiv (|v_{\text{rel},s}| \leq \varepsilon_v) \wedge \left(\tau_{s,-}^{\text{stick}} \leq \tau_{s,ns} \leq \tau_{s,+}^{\text{stick}} \right).$$

The branch closure for the belt acceleration and contact torques is then

$$(\dot{v}_b, \tau_p, \tau_s) = \begin{cases} (\dot{v}_{b,\text{ns}}, \tau_{p,\text{ns}}, \tau_{s,\text{ns}}), & \mathcal{S}_p \wedge \mathcal{S}_s, \\ (\dot{v}_{b,p\text{-slip}}, \tau_p \text{ from Equation (3.6.12)}, \tau_s \text{ from Equation (3.6.11)}), & \neg \mathcal{S}_p \wedge \mathcal{S}_s, \\ (\dot{v}_{b,s\text{-slip}}, \tau_p \text{ from Equation (3.6.19)}, \tau_s \text{ from Equation (3.6.22)}), & \mathcal{S}_p \wedge \neg \mathcal{S}_s, \\ (\dot{v}_{b,ps\text{-slip}}, \tau_p \text{ from Equation (3.6.26)}, \tau_s \text{ from Equation (3.6.28)}), & \neg \mathcal{S}_p \wedge \neg \mathcal{S}_s. \end{cases} \quad (3.6.32)$$

The corresponding belt accelerations are given by Equation (3.4.12), Equation (3.6.15), Equation (3.6.23), and Equation (3.6.29), respectively.

Thus, when both contacts can remain adhered, the model uses the no-slip torque demands. When one or both contacts cannot remain adhered, the corresponding slip branch replaces the no-slip demand with saturated kinetic traction and solves the belt acceleration from the belt equation of motion.

3.6.7 Section Summary

This section completed the torque-transfer closure for cases where the no-slip candidate cannot be maintained. Relative contact speeds were introduced to identify whether each belt–pulley interface is adhered or sliding, and kinetic traction was used to define the torque applied by a slipping contact.

The resulting branch structure separates the possible contact states into no-slip, primary slip, secondary slip, and two-contact slip. In each slipping case, the saturated contact torque replaces the no-slip demand, and the belt equation of motion determines the corresponding belt acceleration.

Together with the no-slip demand from ?? and the traction admissibility conditions from Section 3.5, the branch selection law in Equation (3.6.32) provides the final torque-transfer rule needed by the complete CVT dynamic model.

3.7 Complete CVT Dynamic Model

This section collects the results of the preceding derivations into one closed nonlinear dynamical model. No new physics is introduced here. The purpose is to summarize, in one place,

1. the state variables,
2. the geometric and contact quantities computed from those states,
3. the torque-transfer closure,
4. and the final governing equations of motion.

3.7.1 State Definition

The state vector is

$$\mathbf{x}(t) = (\omega_p, \omega_s, s, \dot{s}, v_b), \quad (3.7.1)$$

where

- ω_p is the primary pulley angular velocity,

- ω_s is the secondary pulley angular velocity,
- s is the axial shift coordinate,
- $\dot{s}$ is the axial shift velocity,
- v_b is the belt transport speed.

3.7.2 Geometry and Contact Kinematics

At each instant, the shift coordinate s determines the pulley geometry through the belt-length constraint and the conical kinematic relations derived in [Section 3.1](#). In particular,

$$r_{p,\text{eff}}, \quad r_{s,\text{eff}}, \quad r_{p,\text{cm}}, \quad r_{s,\text{cm}}, \quad \phi_p, \quad \phi_s$$

are functions of s . For compactness in the complete model, write

$$r_p = r_{p,\text{eff}}(s), \quad r_s = r_{s,\text{eff}}(s).$$

The geometric CVT ratio remains

$$R(s) = \frac{r_{s,\text{eff}}(s)}{r_{p,\text{eff}}(s)}. \quad (3.7.2)$$

Its time derivative is

$$\dot{R} = \dot{R}(s, \dot{s}), \quad (3.7.3)$$

as given by [Equation \(3.1.54\)](#).

The relative contact speeds at the two pulley interfaces are

$$v_{\text{rel},p} = r_p \omega_p - v_b, \quad v_{\text{rel},s} = v_b - r_s \omega_s, \quad (3.7.4)$$

as defined in [Equation \(3.6.1\)](#) and [Equation \(3.6.2\)](#). These quantities determine whether each contact is eligible to remain adhered or must be treated as sliding.

3.7.3 Torque-Transfer Closure

The torque-transfer subsystem is closed by determining the primary contact torque τ_p , the secondary contact torque τ_s , and the belt acceleration $\dot{v}_b$. These quantities are computed algebraically from the current state and contact branch.

The no-slip candidate derived in [Section 3.4.2](#) provides

$$\dot{v}_{b,\text{ns}}, \quad \tau_{p,\text{ns}}, \quad \tau_{s,\text{ns}},$$

from [Equation \(3.4.12\)](#), [Equation \(3.4.15\)](#), and [Equation \(3.4.16\)](#). These are the belt acceleration and contact torque demands required for adhered motion at both pulleys.

The admissibility conditions derived in [Section 3.5.3](#) and [Section 3.5.4](#) determine whether those no-slip demands can be supported. The primary contact is admissible when

$$|\tau_{p,\text{ns}}| \leq \tau_{p,\text{max}}^{\text{stick}}, \quad (3.7.5)$$

as in [Equation \(3.5.12\)](#). The secondary contact is admissible when

$$\tau_{s,-}^{\text{stick}} \leq \tau_{s,\text{ns}} \leq \tau_{s,+}^{\text{stick}}, \quad (3.7.6)$$

as in [Equation \(3.5.14\)](#).

The active contact branch is selected using the closure law from [Section 3.6.6](#). In compact form,

$$(\dot{v}_b, \tau_p, \tau_s) = \text{the branch output selected by [Equation \(3.6.32\)](#).} \quad (3.7.7)$$

If both contacts remain adhered, the branch output is

$$(\dot{v}_b, \tau_p, \tau_s) = (\dot{v}_{b,\text{ns}}, \tau_{p,\text{ns}}, \tau_{s,\text{ns}}).$$

If one or both contacts slide, the corresponding slip branch replaces the no-slip demand with saturated kinetic traction and solves $\dot{v}_b$ from the belt equation of motion. The primary-slip, secondary-slip, and two-contact-slip belt accelerations are given by [Equation \(3.6.15\)](#), [Equation \(3.6.23\)](#), and [Equation \(3.6.29\)](#), respectively.

3.7.4 Governing ODEs

Once the branch closure has supplied $\dot{v}_b$, τ_p , and τ_s , the primary pulley equation of motion is

$$\dot{\omega}_p = \frac{\tau_{\text{eng}}(\omega_p) - \tau_p}{I_p}. \quad (3.7.8)$$

The secondary pulley equation of motion is

$$\dot{\omega}_s = \frac{\tau_s - \tau_{\text{load}}(\omega_s)}{I_s}. \quad (3.7.9)$$

The shift-position kinematics are

$$\frac{d}{dt}s = \dot{s}. \quad (3.7.10)$$

The axial shift acceleration is obtained from [Equation \(3.2.52\)](#):

$$\ddot{s} = \frac{\left(F_{p,\text{ax}}(s, \omega_p) + F_{c,p}(s, v_b)\right) - \left(F_{s,\text{ax}}(s, \tau_s) + F_{c,s}(s, v_b)\right)}{m_{p,m} + m_{s,m} + \frac{\rho_b A_b L_b}{4}}. \quad (3.7.11)$$

Finally, the belt transport speed evolves according to the branch-selected belt acceleration:

$$\frac{d}{dt}v_b = \dot{v}_b, \quad \dot{v}_b \text{ from [Equation \(3.7.7\)](#).} \quad (3.7.12)$$

3.7.5 Model Evaluation Sequence

Given the current state

$$\mathbf{x}(t) = (\omega_p, \omega_s, s, \dot{s}, v_b),$$

the model is evaluated in the following order:

1. Compute the pulley geometry from s , including r_p , r_s , $r_{p,\text{cm}}$, $r_{s,\text{cm}}$, ϕ_p , and ϕ_s .
2. Compute the engine torque $\tau_{\text{eng}}(\omega_p)$ and the reflected load torque $\tau_{\text{load}}(\omega_s)$.

3. Compute the no-slip candidate

$$\dot{v}_{b,\text{ns}}, \quad \tau_{p,\text{ns}}, \quad \tau_{s,\text{ns}},$$

using Equation (3.4.12), Equation (3.4.15), and Equation (3.4.16).

4. Compute the primary and secondary no-slip admissibility quantities from Section 3.5.3 and Section 3.5.4.
5. Compute the relative contact speeds $v_{\text{rel},p}$ and $v_{\text{rel},s}$ using Equation (3.7.4).
6. Select the active torque-transfer branch using Equation (3.6.32). This determines the applied values of

$$\dot{v}_b, \quad \tau_p, \quad \tau_s.$$

7. Evaluate the ODE right-hand sides Equation (3.7.8), Equation (3.7.9), Equation (3.7.10), Equation (3.7.11), and Equation (3.7.12).

3.7.6 Complete Nonlinear ODE System

The complete closed CVT model is therefore

$$\begin{aligned} \dot{\omega}_p &= \frac{\tau_{\text{eng}}(\omega_p) - \tau_p}{I_p}, \\ \dot{\omega}_s &= \frac{\tau_s - \tau_{\text{load}}(\omega_s)}{I_s}, \\ \frac{d}{dt}s &= \dot{s}, \\ \frac{d}{dt}\dot{s} &= \frac{\left(F_{p,\text{ax}}(s, \omega_p) + F_{c,p}(s, v_b)\right) - \left(F_{s,\text{ax}}(s, \tau_s) + F_{c,s}(s, v_b)\right)}{m_{p,m} + m_{s,m} + \frac{\rho_b A_b L_b}{4}}, \\ \frac{d}{dt}v_b &= \dot{v}_b. \end{aligned} \tag{3.7.13}$$

with the algebraic closure

$$(\dot{v}_b, \tau_p, \tau_s) = \text{the active branch output from Equation (3.6.32)}.$$

In summary, the state determines the pulley geometry and relative contact speeds. The no-slip candidate determines the torque demand required for adhered motion. The traction admissibility conditions determine whether that candidate can be maintained. If not, the appropriate slip branch supplies saturated contact torques and the resulting belt acceleration. These branch-selected quantities then feed back into the rotational, belt, and axial shift dynamics, closing the complete CVT state-space model.

Chapter 4

Results and Discussion

4.1 Simulation Results

This section compares four launch simulations: a nominal baseline case, a lighter-flyweight case, a steeper-helix case with reduced secondary torque reactivity, and a combined case with both a shallower initial primary ramp and a steeper helix. The purpose of these results is not to match experimental vehicle data directly, but to show that the model produces mechanically interpretable launch behaviour and responds to tuning changes in physically sensible ways.

The results are organized around the launch shift curves of these four cases. These curves first provide an overall picture of the launch, including engagement, low-ratio operation, active upshift, and high-ratio behaviour. The ratio terminology follows [Section 3.1.7](#): low ratio means larger R (greater speed reduction), and high ratio means smaller R . Following subsections then explain those trends by examining the axial force balance across the CVT and the resulting torque-transfer and slip behaviour. In particular, the combined case is included to show a clearly slip-dominated launch, in which the model predicts loss of the low-ratio hold and sustained slip through the early portion of the launch.

Taken together, the four cases are intended to show three things: first, that the baseline tuning produces a coherent and interpretable launch trajectory; second, that changes to primary and secondary tuning shift the launch behaviour in the expected direction; and third, that when the tuning is made sufficiently unfavorable, the model captures the transition to prolonged

slipping rather than continuing to predict an unrealistic no-slip response. The implementation used to generate these simulations, along with repository, release, and data-access details, is documented in [Section 4.2](#).

4.1.1 Simulation Cases and Phase Convention

The results section compares four full-throttle launch simulations from rest. One case is treated as the nominal baseline, while the remaining three are targeted tuning variations chosen to isolate specific changes in CVT behaviour. All cases use the same vehicle, gearbox, tire, and engine model parameters; they differ only in the clutch tuning parameters noted below.

Table 4.1: Launch cases considered in the results section. All parameters not listed remain equal to the nominal baseline.

Case	Description	Purpose in results section
D	Default tuning	Baseline reference case
F	Lighter flyweights	Shows the effect of reduced primary centrifugal clamping
H	Steeper helix	Shows the effect of reduced secondary torque reactivity
C	Shallower initial primary ramp + steeper helix	Produces a strongly slip-dominated launch

To keep the discussion consistent across the different plots, the launch is described in terms of a small number of recurring operating phases. These phases are not introduced as separate events for each case, but as common regions of behaviour used to interpret the launch trajectories and their underlying force and torque balances.

Throughout the following subsections, these phases will be indicated directly on the plots using low-opacity background shading. The same color convention is used wherever possible so that the reader can track the evolution of each case across the shift, clamping-force, and torque-transfer results.

The phase colors are

- **engagement** — light blue,
- **low-ratio operation** — light green,
- **active upshift** — light yellow, and
- **high-ratio operation** — light red.

Not every case is expected to exhibit all four phases equally clearly. The phase shading is therefore used as a visual guide to the dominant operating regime, rather than as a claim that every boundary is perfectly sharp.

4.1.2 Launch Shift Curves

The overall launch behaviour of the four tuning cases is first compared in [Figure 4.1](#). Each trajectory is plotted in engine-speed–vehicle-speed coordinates, so that engagement, ratio change, and the final high-ratio condition can all be viewed on the same axes. All four simulations begin from the same launch initial conditions,

$$\omega_p(0) = 1800 \text{ rpm}, \quad \omega_s(0) = 0,$$

where ω_p is the primary angular speed and ω_s is the driven angular speed corresponding to zero vehicle speed. From this state, the system is released into a full-throttle forward simulation using the complete coupled model developed in the preceding sections.

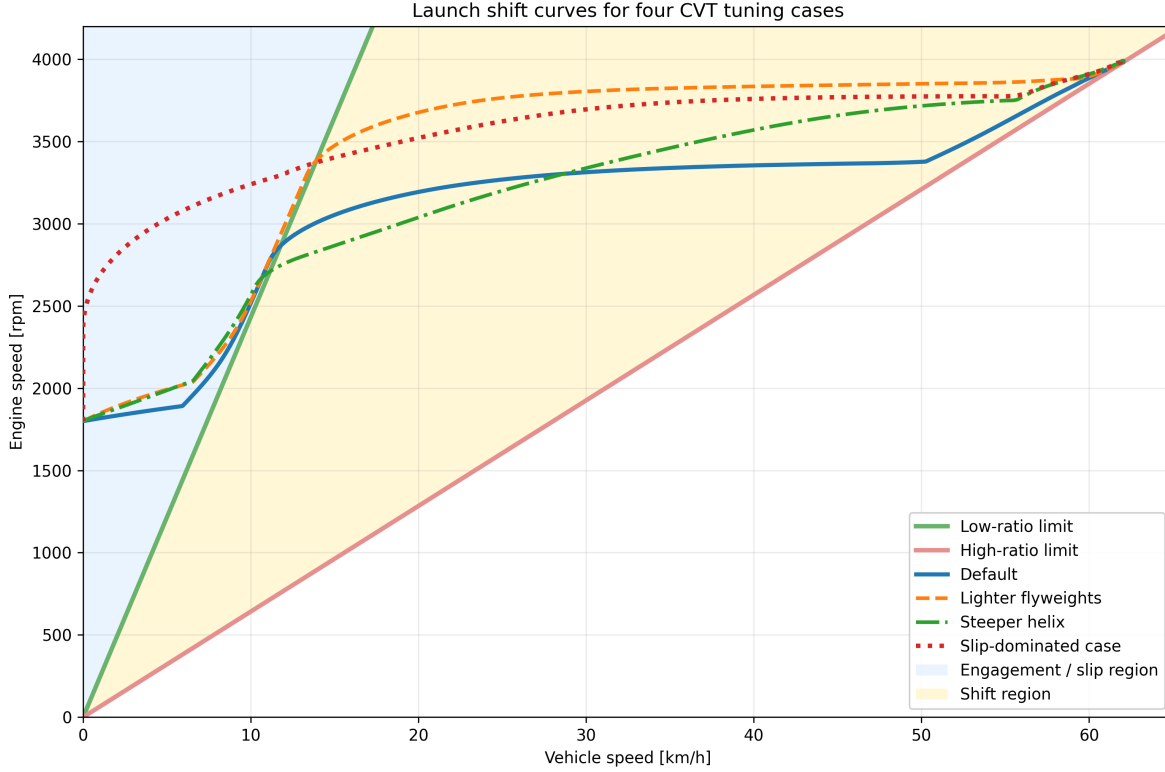


Figure 4.1: Engine-speed–vehicle-speed launch trajectories for the four tuning cases. The green line is the low-ratio limit, corresponding to a fully unshifted CVT. The red line is the high-ratio limit, corresponding to a fully shifted CVT. The blue shaded region to the left of the low-ratio line corresponds to launch engagement, where slip must be present. The yellow region between the two limit lines is the no-slip shift region.

The two reference lines are the kinematic no-slip limits of the CVT. The **low-ratio line** represents the fully unshifted transmission, where the CVT is in its torque-multiplying launch condition. The **high-ratio line** represents the fully shifted transmission, where the CVT has reached its final speed-increasing condition. Between these two limits lies the admissible shift region. A trajectory cannot move to the right of the high-ratio line, and any portion of a trajectory lying to the left of the low-ratio line must involve slip, since even the fully unshifted CVT cannot support such a low vehicle speed for the corresponding engine speed.

Read from left to right, the figure therefore shows the full launch sequence. The launch begins in the blue engagement region, where the vehicle is still too slow for no-slip operation. After crossing the low-ratio boundary, the trajectory enters the shift region. In a well-behaved launch, the CVT then tends to move approximately horizontally across this region, increasing vehicle speed while holding engine speed near a preferred operating value. This nearly horizontal portion will be referred to here as the *flat-shift region*. As the shift completes, the trajectory approaches the high-ratio line, which forms the final no-slip boundary of the launch.

With that interpretation in place, the differences between the four tuning cases are already visible. The **default** case shows the clearest baseline behaviour: a short engagement region, a brief low-ratio hold, and then a relatively flat shift through the middle of the plot before approaching the high-ratio

boundary. This is the most balanced of the four trajectories, since it neither leaves low ratio too early nor rises excessively in engine speed during the main shift.

The **lighter-flyweight** case retains low ratio for longer before crossing into the shift region. Its flat-shift portion is also noticeably higher in engine speed than the default case, so the launch spends more of the main shift at elevated primary speed. The overall shape is still recognizable as a conventional launch trajectory, but the shift is delayed and carried out at a higher engine-speed level.

The **steeper-helix** case behaves differently. It leaves the low-ratio boundary much earlier, so the launch shows little sustained low-ratio hold. Its shift path is also less flat: instead of moving nearly horizontally across the shift region, it climbs upward more strongly as vehicle speed increases. This indicates that the launch does not settle into the same nearly constant engine-speed shift seen in the default case.

The **combined slip-dominated** case is the most extreme. It remains in the engagement region for much longer, showing no clear low-ratio hold before entering the shift region. Once it does cross into the no-slip range, its shift still occurs at a comparatively high engine speed, and the early launch is much more dominated by slip than by clean low-ratio operation.

At this stage, [Figure 4.1](#) is intended to establish the overall shape of the four launches and the main qualitative differences between them. The key observations are the amount of low-ratio retention, the height and flatness of the main shift segment, and the extent of the initial slip-dominated portion of the launch. The following subsections explain these differences in terms of the underlying axial force balance and torque-transfer behaviour of the CVT.

4.1.3 Axial Force Balance Through the Launch

The shift-curve trajectories of [Figure 4.1](#) indicate when each case remains near low ratio, when it begins to upshift, and how quickly it reaches high ratio. To explain those differences mechanically, [Figure 4.2](#) compares the total axial force acting on the primary and secondary pulleys for each tuning case, with the same launch phases shaded in the background.

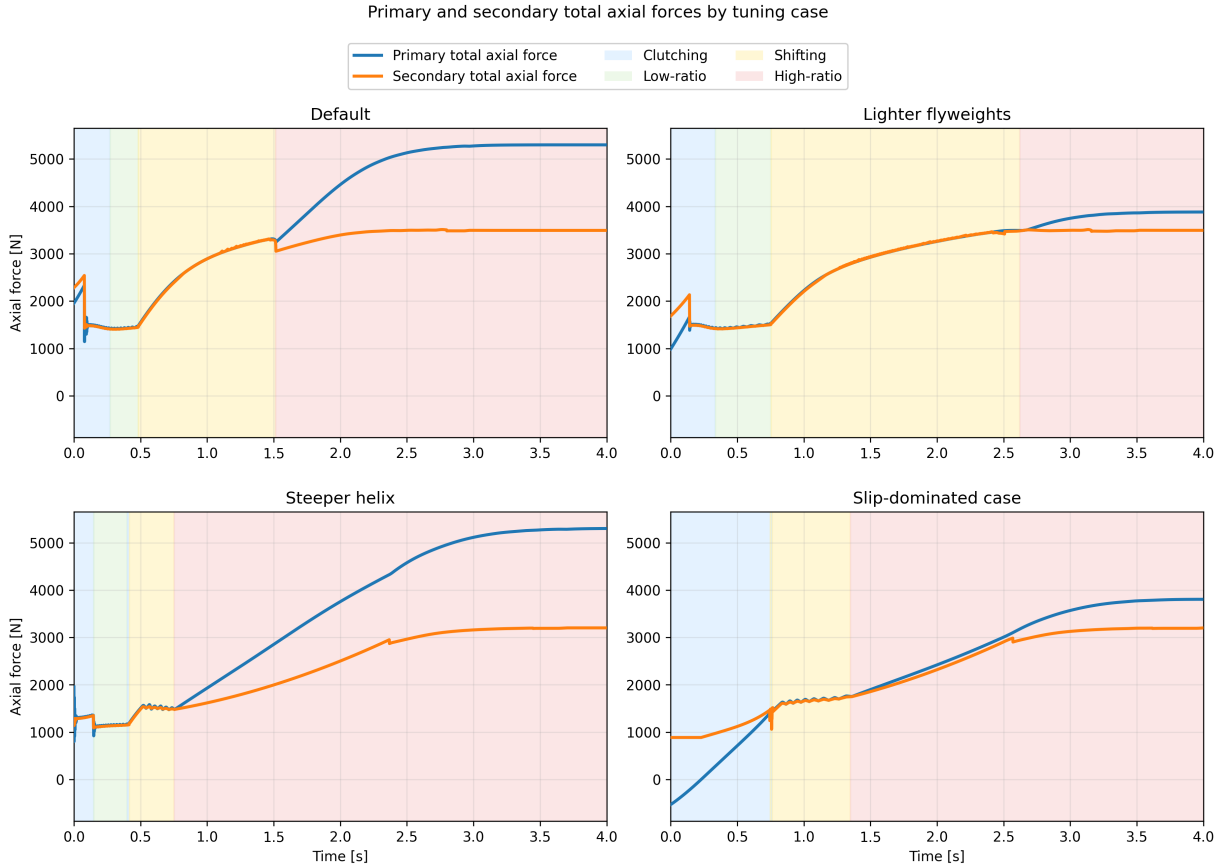


Figure 4.2: Primary and secondary total axial forces during launch for the four tuning cases. Blue curves show total primary axial force, orange curves show total secondary axial force. Background shading indicates the clutching, low-ratio, shifting, and high-ratio phases defined earlier.

These plots should be read as force-balance diagrams for the shift. While the secondary axial force exceeds the primary axial force, the transmission is held toward low ratio. Once the primary force overtakes the secondary, the pulley pair is driven into upshift. The timing of that crossover therefore determines how long the launch remains near low ratio and how early the transmission begins moving through its ratio range.

The **default** case shows the most balanced behaviour. During the initial clutching phase, the secondary force begins noticeably above the primary force, so the transmission is held near its low-ratio condition rather than shifting immediately. This produces the short but clear low-ratio hold seen previously in [Figure 4.1](#). As the launch progresses, the primary axial force rises and eventually overtakes the secondary, initiating the main upshift. Importantly, the secondary force does not remain fixed while this happens. It also rises throughout the shift, so the system continues to resist ratio change even after upshift begins. This is mechanically important: if the secondary force stayed nearly constant while the primary force rose rapidly, the transmission would sweep through the shift range much more abruptly. Instead, both sides grow together, giving the default case its smoother and more controlled shift.

The **lighter-flyweight** case makes this point especially clear. Relative to the default case, the primary force is reduced in the early launch, while the secondary remains comparatively strong.

The initial force gap is therefore larger, meaning the low-ratio condition is held more firmly and for longer. This matches the longer low-ratio segment seen in the shift curves. Later in the launch, the primary still rises enough to drive upshift, but it does so later and at a higher engine-speed level than in the default case. In other words, this case does not fundamentally change the character of the shift; it mainly delays it by weakening the primary closing tendency during engagement and early launch.

The **steeper-helix** case behaves differently. Here, the initial difference between secondary and primary force is very small, and the primary overtakes the secondary much earlier. This explains why the corresponding shift curve showed little sustained low-ratio hold and entered the shifting region so quickly. We also see a differently shaped force evolution throughout the shift itself. In the default and lighter-flyweight cases, both forces continue rising together in a gradual way through the main shift region. In the steeper-helix case, both forces rise sharply early on and then level off much sooner. The two forces still remain relatively close to one another, but the overall shape they trace is different. This helps explain why the earlier shift curve did not display the same flat-shift behaviour as the default case. Rather than maintaining a long, nearly constant-speed shift, the transmission shows a more rising shift trajectory, consistent with this less gradual force evolution.

The **slip-dominated** case is the most extreme. Its early launch is characterized by a prolonged clutching phase and no meaningful low-ratio hold. This is consistent with the earlier shift-curve figure, where the trajectory spent much longer in the slip-dominated region before entering the no-slip shift region. Importantly, the beginning of geometric shift does not imply that the system has already stopped slipping. It only indicates that the shift coordinate has begun to move away from its initial value. The more important feature in this case is the low magnitude of both axial forces in the early launch. Compared with the other cases, neither pulley develops a strong axial loading during the initial portion of the event. This weak overall clamping is a key reason why this case behaves poorly, and it will be seen more directly in the following torque-transfer plots where the associated slip remains elevated for much longer.

One additional feature is visible near the beginning of each case. The early spike in secondary axial force is the torque-reactive contribution of the secondary. It appears most strongly during the initial launch when transmitted torque rises rapidly, and it provides an immediate resisting effect against premature upshift. This feature is especially useful because it shows that the secondary is responding dynamically to transmitted torque rather than acting as a static spring-only restraint. The influence of this torque reactivity will be seen more directly in the following torque-transfer results, but its signature is already visible here in the early force histories.

Taken together, [Figure 4.2](#) provides the mechanical explanation for the differences observed in [Figure 4.1](#). A larger initial gap between secondary and primary force corresponds to stronger low-ratio retention, as seen in the lighter-flyweight case. A very small gap corresponds to premature upshift, as seen in the steeper-helix case. The default case lies between these extremes and therefore produces the most balanced launch. Perhaps most importantly, the figure shows that the shift is not driven by the primary alone. The secondary rises with it throughout the launch, and the actual shift behaviour emerges from the evolving balance between the two rather than from either force in isolation. At the same time, this figure only explains the shift tendency and overall clamping levels; it has not yet quantified the resulting slip behaviour, which is addressed next.

4.1.4 Torque Bounds, No-Slip Demand, and Coupling Torque

The force-balance results of Figure 4.2 explain when each case tends to remain at low ratio and when it begins to shift. However, force balance alone does not determine whether the belt is actually able to transmit the torque required for sticking. To examine that question, Figure 4.3 compares four quantities during the launch: the primary and secondary traction bounds, the no-slip coupling torque τ_{ns} , and the actual transmitted coupling torque τ_c .

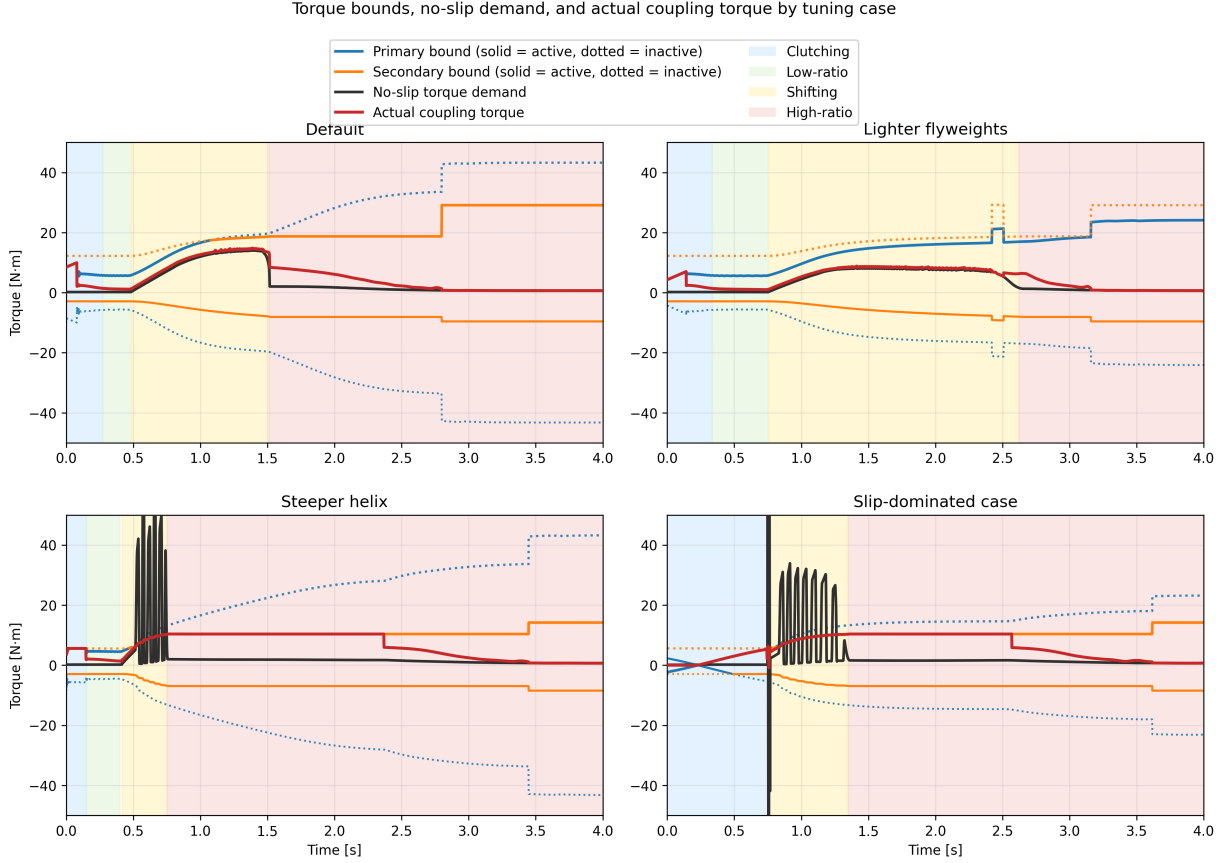


Figure 4.3: Torque bounds, no-slip demand, and actual coupling torque for the four tuning cases. Blue and orange curves show the primary and secondary bounds, with the active bound drawn solid and the inactive bound dotted. The black curve shows the no-slip torque demand τ_{ns} , and the red curve shows the actual transmitted coupling torque τ_c . Background shading indicates the clutching, low-ratio, shifting, and high-ratio phases defined earlier.

These plots should be read as traction-capacity diagrams. At any instant, the belt can only remain in stick if the required no-slip torque lies inside the admissible interval defined by the active upper and lower bounds. When τ_{ns} lies inside that interval, the actual coupling torque can follow the no-slip demand closely. When τ_{ns} exceeds the available bounds, sticking is no longer admissible and the transmitted torque must saturate at the corresponding active limit.

A first broad trend is immediately visible. The cases that settle out of slip early in the launch are precisely the cases with larger admissible positive torque capacity during the initial clutching and low-ratio phases. In the **default** and **lighter-flyweight** cases, the upper torque bound rises to a

relatively large value early in the launch. This gives the system enough admissible coupling torque to reduce the belt-speed mismatch and recover toward sticking. By contrast, the **slip-dominated** case begins with essentially no admissible positive torque and only develops usable capacity more gradually. That lower early torque capacity directly explains why the slip-dominated case spends much longer in the clutching region.

This same distinction appears in the evolution of τ_c . In the cases that recover stick early, the actual coupling torque relaxes toward and then tracks the no-slip demand through the end of clutching and into low-ratio operation. Once low-ratio launch is established, the red and black curves remain close, indicating that the required torque stays admissible and sustained slip is not reintroduced immediately.

A second important pattern appears once the transmission begins to shift. In all four cases, the no-slip torque rises during the shift phase. This is consistent with the form of τ_{ns} , in which the ratio-rate term becomes active once the CVT begins moving away from its initial ratio. In the **default** and **lighter-flyweight** cases, this rise remains below the admissible upper torque bound, so the actual coupling torque continues to follow the no-slip demand and large renewed slip does not occur. In the **steeper-helix** and **slip-dominated** cases, however, τ_{ns} rises above the admissible upper bound during the shift. At that point, sticking is no longer feasible, the actual coupling torque saturates at the active maximum, and renewed slip appears until the state returns closer to the sticking condition.

The **steeper-helix** and **slip-dominated** cases also show visibly oscillatory behaviour in the no-slip torque during the shift onset. This is consistent with the oscillations already seen in the preceding axial-force plots. The most direct source is the ratio-rate contribution to τ_{ns} : if the shift dynamics are not smooth, then the implied no-slip torque need not evolve smoothly either. In these two poorer tuning cases, the shift motion appears more weakly damped, so the no-slip torque exhibits stronger excursions during the transition into active shifting. A plausible reason is that the present model neglects parasitic losses and other non-critical frictional effects, which in a real system would provide additional damping and suppress some of this oscillatory behaviour. This is therefore a useful limitation to note: the model captures the overall stick-slip transitions and the active limiting mechanism, but the transient oscillations in the most aggressive cases are likely amplified by the intentionally idealized loss assumptions.

Another common feature is the gradual relaxation of the actual coupling torque toward the no-slip demand rather than an instantaneous snap to it. This comes from the regularized transition law used in the simulation, discussed in Appendix C.3, which replaces a discontinuous switch with a smooth tanh-based approximation. Its purpose is numerical: it reduces chattering and improves stability near the stick-slip transition. The effect is visible here as a slight lag in the recovery of perfect sticking, but it does not change the main qualitative behaviour of the four cases. The same limiting patterns are still present, and the cases that lose admissibility remain clearly distinguishable from those that do not.

Finally, each case shows a noticeable jump in the admissible torque bound once full sticking is re-established near the end of the launch. This reflects the change in limiting behaviour used by the model after slip is removed, together with the corresponding increase in effective friction behaviour assumed in the sticking regime. The important point for the present discussion is that this jump occurs only after the system has already relaxed back toward the no-slip state; it is therefore a consequence of stick recovery rather than its cause.

Taken together, Figure 4.3 closes the interpretation begun in the previous two subsections. The

shift curves showed the overall launch behaviour, and the axial-force plots explained the tendency to hold or leave low ratio. The present figure then shows whether the required coupling torque is actually admissible throughout those phases. The default and lighter-flyweight cases maintain sufficient positive torque capacity to recover stick early and remain near the no-slip demand through the main shift. The steeper-helix and slip-dominated cases do not: in both, the no-slip torque exceeds the available upper bound during the shift, forcing the actual coupling torque to saturate and reintroducing slip. In this way, the torque plots both confirm the solid patterns seen earlier and reveal one of the model’s clearest shortcomings: the most weakly damped cases display exaggerated oscillatory transients due to the idealized loss assumptions.

4.1.5 Launch Performance Comparison

The preceding subsections established the mechanical differences between the four tuning cases. The shift-curve plots showed the overall launch trajectory, the axial-force plots explained the tendency to hold or leave low ratio, and the torque-bound plots showed whether the required coupling torque remained admissible throughout the launch. The final step is to compare how those differences affect overall launch performance.

Two simple metrics are used here: the time required to travel 50 m, and the time required to reach 60 km/h. These are useful because they summarize the launch in two complementary ways. The 50 m time reflects the integrated quality of the launch as a whole, while the 60 km/h time emphasizes how quickly the drivetrain can build vehicle speed through the main acceleration phase.

Table 4.2: Launch performance metrics for the four tuning cases.

Case	Time to 50 m [s]	Time to 60 km/h [s]
Default	3.93	2.27
Lighter flyweights	4.26	2.78
Steeper helix	4.19	2.82
Slip-dominated case	4.41	2.98

The default case performs best on both metrics, which is consistent with the earlier mechanism-level results. It develops enough admissible coupling torque to reduce slip early, retains low ratio long enough to launch effectively, and then transitions into a controlled shift without reintroducing large sustained slip. This is the most balanced use of the CVT: the transmission first allows a strong initial torque transfer into the driveline, and then continues accelerating the vehicle while keeping the shift progression smooth and admissible.

This point is worth emphasizing. The coupling torque plays two roles at once. It is the torque that loads the engine through the transmission, limiting how freely the primary (and therefore the engine) can accelerate, and it is also the torque delivered through the CVT that accelerates the vehicle from rest. A strong early coupling torque is therefore beneficial when it is admissible, because it quickly pulls the belt-speed mismatch down and simultaneously applies useful drive torque to the vehicle. The default case benefits from exactly this behaviour: it uses the initial slip region to establish a relatively large transmitted torque early in the launch, which helps “kick-start” vehicle acceleration before the main shift begins.

The lighter-flyweight case performs worse on both metrics, even though its shift remains comparatively well behaved. This matches the earlier interpretation that its main drawback is delayed

primary loading during the early launch. By holding low ratio longer but developing less aggressive early coupling, it sacrifices initial acceleration and does not recover that loss later.

The steeper-helix case shows a different trade-off. It leaves low ratio too early and re-enters slip during the shift, which degrades the quality of the launch. However, because it still develops appreciable coupling torque early in the event, its 50 m time remains slightly better than the lighter-flyweight case. Its slower time to 60 km/h, on the other hand, is consistent with the less stable shift behaviour and the renewed slip seen in the torque-bound plots.

The slip-dominated case performs worst overall. This is the expected result from the earlier figures: its early clamping forces are weakest, its admissible torque rises too slowly, and its launch remains slip-dominated for too long. As a result, it spends too much of the start of the event establishing torque transfer rather than converting that torque cleanly into forward acceleration.

Overall, these performance metrics support the mechanism-level interpretation developed throughout the section. The best launch is not produced by simply holding low ratio as long as possible, nor by shifting as early as possible. Instead, good performance requires a balance: sufficient early admissible coupling torque to accelerate the vehicle strongly from rest, enough low-ratio retention to avoid premature upshift, and a smooth enough shift that the required no-slip torque does not repeatedly exceed the available traction limits.

4.2 Implementation and Reproducibility

The source code for the CVT simulator used in this work is available at <https://github.com/gr812b/CVT-Simulator>. This implementation includes the mathematical model developed in the main derivation sections along with the practical numerical regularization strategy described in [Appendix C.3](#).

To support reproducibility, the exact version used to generate the figures and tables in this manuscript will be archived as a tagged release:

- repository release (to be finalized): <https://github.com/gr812b/CVT-Simulator/releases/tag/vX.Y.Z>,
- archival DOI landing page (placeholder): <https://doi.org/XX.XXXX/zenodo.XXXXXXX>.

Unless otherwise stated, simulation cases in [Section 4.1](#) correspond to that archived release. The repository README and release notes describe the execution workflow, configuration files, and plotting scripts used to produce the reported results.

An interactive web deployment of the simulator is also available for demonstration purposes: <https://cvt.kaiarseneau.dev>. This live endpoint is provided for accessibility and does not replace the archived release as the canonical reproducibility artifact.

4.3 Conclusion

This work developed a unified first-principles dynamic model for a mechanically actuated dry rubber V-belt CVT and its coupling to the vehicle drivetrain. Starting from pulley geometry, belt-length closure, actuator mechanics, and rotational dynamics, the derivation produced a closed nonlinear state-space formulation in which ratio evolution, torque transmission, slip admissibility, and vehicle response are solved consistently in time.

The completed formulation brings together several mechanisms that strongly govern mechanically actuated CVT behaviour: primary flyweight actuation, secondary torque-reactive helix clamping, belt geometric closure, axial shift dynamics, traction-limited torque transfer, and longitudinal drivetrain coupling. The main outcome is a single dynamic framework in which these effects interact directly, while remaining mechanically interpretable in terms of the underlying pulley forces, ratio change, and torque limits.

The simulation results showed coherent launch behaviour across the tuning cases considered. The shift-curve results captured distinct differences in engagement, low-ratio retention, main-shift shape, and approach to high ratio. The axial-force results showed that these differences could be traced back to the evolving balance between primary and secondary clamping. The torque-bound results then showed when the no-slip coupling demand remained admissible and when renewed slip was forced by the available traction limits. Together, these results formed a consistent mechanism chain from tuning changes, to force balance, to torque admissibility, to overall launch behaviour.

An important outcome of the study is that the model preserved physical intuition across multiple levels. Changes in tuning did not simply produce different output curves; they produced changes that remained understandable in mechanical terms. Stronger or weaker low-ratio retention appeared through the initial clamping-force gap, earlier or later upshift appeared through the timing of force crossover, and reintroduced slip appeared when the no-slip torque rose beyond the admissible coupling bounds. This consistency gives confidence that the formulation is capturing the dominant interactions it was intended to represent.

The results also highlighted useful limitations of the present model. In the more aggressive cases, the no-slip torque demand exhibited visibly underdamped oscillatory transients during shift onset. These were consistent with irregular shift-rate evolution in the model and suggest that the idealized loss assumptions, particularly the neglect of parasitic losses and other non-critical frictional effects, leave the system with less damping than would be expected in real hardware. The formulation also remains limited to one-dimensional vehicle motion and does not yet include thermal effects, wear progression, or more detailed tribological contact evolution.

Overall, the present work provides a physically transparent dynamic foundation for understanding mechanically actuated CVT behaviour during transient launch events. Its main value is not only that it closes the governing mechanisms into one consistent dynamical system, but also that the resulting behaviour remains traceable back to clear mechanical causes. With further parameter identification, experimental validation, and extension to include more realistic damping and loss mechanisms, the framework developed here can serve as a useful basis for both engineering interpretation and future design-oriented CVT simulation.

Bibliography

- Olav Aaen. *Clutch Tuning Handbook*. Aaen Performance Parts Inc., 1979.
- Farid Al-Bender, Vincent Lampaert, and Jan Swevers. The generalized maxwell-slip model: A novel model for friction simulation and compensation. *IEEE Transactions on Automatic Control*, 50(11):1883–1887, 2005. doi: 10.1109/TAC.2005.858676.
- Ivan Arango and Sebastian Muñoz Alzate. Numerical design method for CVT supported in standard variable speed rubber V-belts. *Applied Sciences*, 10(18):6238, 2020. doi: 10.3390/app10186238.
- Brian Armstrong-Hélouvry, Pierre Dupont, and Carlos Canudas de Wit. A survey of models, analysis tools and compensation methods for the control of machines with friction. *Automatica*, 30(7):1083–1138, 1994. doi: 10.1016/0005-1098(94)90209-7.
- Brian Gene Ballew. Investigation of a numerical algorithm for a discretized rubber-belt continuously variable transmission dynamic model and techniques for the measurement of belt material properties. Master’s thesis, University of Arkansas, 2015.
- Luca Bertini, Carlo Carmignani, and Francesco Frendo. Analytical model for the power losses in rubber V-belt continuously variable transmission (CVT). *Mechanism and Machine Theory*, 78: 289–306, 2014. Verify page range and DOI against final publisher version.
- B. Bonsen, T. W. G. L. Klaassen, and M. Pulles. Analysis of slip in a continuously variable transmission. *Journal of Mechanical Design*, 126(5):822–829, 2004.
- Richard P. Brent. *Algorithms for Minimization without Derivatives*. Prentice-Hall, Englewood Cliffs, NJ, 1973.
- Richard G. Budynas and J. Keith Nisbett. *Shigley’s Mechanical Engineering Design*. McGraw-Hill Education, New York, NY, 10 edition, 2015. ISBN 978-0-07-339820-4.
- Marco Cammalleri. A new approach to the design of a speed-torque-controlled rubber V-belt variator. *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering*, 219(12):1413–1427, 2005. doi: 10.1243/095440705X35080.
- Marco Cammalleri and Francesco Sorge. Approximate closed-form solutions for the shift mechanics of rubber belt variators. In *Proceedings of the ASME 2009 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*, Volume 6: ASME Power Transmission and Gearing Conference; 3rd International Conference on Micro- and Nanosystems; 11th International Conference on Advanced Vehicle and Tire Technologies, San Diego, California, USA, 2009. ASME.
- Carlos Canudas de Wit, Henrik Olsson, Karl Johan Åström, and Pablo Lischinsky. A new model

- for control of systems with friction. *IEEE Transactions on Automatic Control*, 40(3):419–425, 1995. doi: 10.1109/9.376053.
- Giovanni Carbone, Luigi Mangialardi, and Giovanni Mantriota. The influence of pulley deformations on the shifting mechanism of metal belt CVT. *Journal of Mechanical Design*, 127(1):103–113, 2005. doi: 10.1115/1.1825443.
- T.-F. Chen, D.-W. Lee, and C.-K. Sung. An experimental study on transmission efficiency of a rubber V-belt CVT. *Mechanism and Machine Theory*, 33(4):351–363, 1998.
- J. R. Dormand and P. J. Prince. A family of embedded Runge–Kutta formulae. *Journal of Computational and Applied Mathematics*, 6(1):19–26, 1980.
- Chengwu Duan, Kumar Hebbale, Fengyu Liu, and Jian Yao. Physics-based modeling of a chain continuously variable transmission. *Mechanism and Machine Theory*, 105:397–408, 2016. doi: 10.1016/j.mechmachtheory.2016.07.018.
- G”oran Gerbert. Belt slip—a unified approach. *Journal of Mechanical Design*, 118(3):432–438, 1996. doi: 10.1115/1.2826904.
- G. Juli’o and J.-S. Plante. An experimentally-validated model of rubber-belt CVT mechanics. *Mechanism and Machine Theory*, 46(8):1037–1053, 2011.
- H. Kim, H. Lee, H. Song, and H. Kim. Steady state and transient characteristics of a rubber belt CVT with mechanical actuators. *KSME International Journal*, 16(5):646–653, 2002. Page range should be verified against the final publisher version.
- K. Kim and H. Kim. Axial forces of a V-belt CVT: Part I. theoretical analysis. *KSME Journal*, 3(1):56–61, 1989.
- Lingyuan Kong and Robert G. Parker. Steady mechanics of belt-pulley systems. *Journal of Applied Mechanics*, 72(1):25–34, 2005.
- Lingyuan Kong and Robert G. Parker. Mechanics and sliding friction in belt drives with pulley grooves. *Journal of Mechanical Design*, 128(2):494–502, 2006.
- V. La Battaglia, A. Giogetti, S Marini, G Arcidiacono, and P. Citti. Kinematic analysis of V-belt CVT for efficient system development in motorcycle applications. *Machines*, 10(1):16, 2022. doi: 10.3390/machines10010016.
- Matthew James Messick. An experimentally-validated V-belt model for axial force and efficiency in a continuously variable transmission. Master’s thesis, Virginia Polytechnic Institute and State University, Blacksburg, VA, 2018.
- ScienceDirect Topics. Capstan equation. Available from the ScienceDirect Topics website, n.d. URL <https://www.sciencedirect.com/topics/engineering/capstan-equation>. Accessed: 2026-03-28.
- Sean Sebastian Skinner. Modeling and tuning of cvt systems for SAE baja vehicles. Ms thesis, West Virginia University, Statler College of Engineering and Mineral Resources, Department of Mechanical and Aerospace Engineering, Spring 2020. URL <https://researchrepository.wvu.edu/etd/7590/>.
- Francesco Sorge. A simple model for the axial thrust in V-belt drives. *Journal of Mechanical Design*, 118(4):589–592, 1996.

- Francesco Sorge. A theoretical approach to the shift mechanics of rubber belt variators. *Journal of Mechanical Design*, 130(12):122602, 2008.
- Francesco Sorge and Marco Cammalleri. Helical shift mechanics of rubber V-belt variators. *Journal of Mechanical Design*, 133(4):041006, 2011.
- Nilabh Srivastava and Imtiaz Haque. Dynamics of metal V-belt continuously variable transmissions. *Journal of Mechanical Design*, 128(3):616–624, 2006.
- Nilabh Srivastava and Imtiaz Haque. A review on belt and chain continuously variable transmissions (CVT): Dynamics and control. *Mechanism and Machine Theory*, 44(1):19–41, 2009. doi: 10.1016/j.mechmachtheory.2008.06.007.
- Ahmet Yildiz, Francesco Bottiglione, Antonio Piccininni, Osman Kopmaz, and Giuseppe Carbone. Experimental validation of the carbone–mangialardi–mantriota model of continuously variable transmissions. *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering*, pages 1–10, 2017. doi: 10.1177/0954407017711320. Online-first publication; verify final volume, issue, and page range.

Appendix A

Belt Length Small-Angle Approximation

This appendix quantifies the error introduced by the small-angle approximation commonly used in simplified CVT kinematic models. Using parameter values representative of the physical system considered in this work, we demonstrate that the approximation introduces substantial error in the computed center-to-center distance, then further in the ratio, which is critical for accurate dynamic modeling.

A.1 Standard Approximation

Many simplified treatments assume

$$\frac{r_s - r_p}{C} \ll 1,$$

which implies $\lambda \approx 0$ and therefore

$$\sin^{-1}\left(\frac{r_s - r_p}{C}\right) \approx 0.$$

Under this approximation, the belt-length constraint ?? reduces to

$$L_b \approx \pi(r_p + r_s) + 2\sqrt{C^2 - (r_s - r_p)^2}. \quad (\text{A.1.1})$$

A.2 Derivation of the Approximate Center Distance

To determine the center-to-center distance at the initial configuration, we substitute $r_p = r_{p,\text{outer,min}}$ and $r_s = r_{s,\text{outer,max}}$ into Equation (A.1.1) and solve for C .

Step 1: Isolate the square root. Rearranging Equation (A.1.1):

$$L_b - \pi(r_{p,\text{outer,min}} + r_{s,\text{outer,max}}) = 2\sqrt{C^2 - (r_{s,\text{outer,max}} - r_{p,\text{outer,min}})^2}. \quad (\text{A.2.1})$$

Step 2: Square both sides.

$$[L_b - \pi(r_{p,\text{outer,min}} + r_{s,\text{outer,max}})]^2 = 4[C^2 - (r_{s,\text{outer,max}} - r_{p,\text{outer,min}})^2]. \quad (\text{A.2.2})$$

Step 3: Solve for C^2 .

$$C^2 = \frac{[L_b - \pi(r_{p,\text{outer},\text{min}} + r_{s,\text{outer},\text{max}})]^2}{4} + (r_{s,\text{outer},\text{max}} - r_{p,\text{outer},\text{min}})^2. \quad (\text{A.2.3})$$

Step 4: Take the square root. Expanding the squared term in the numerator:

$$[L_b - \pi(r_{p,\text{outer},\text{min}} + r_{s,\text{outer},\text{max}})]^2 = L_b^2 - 2L_b\pi(r_{p,\text{outer},\text{min}} + r_{s,\text{outer},\text{max}}) + \pi^2(r_{p,\text{outer},\text{min}} + r_{s,\text{outer},\text{max}})^2,$$

the approximate center distance becomes

$$C_{\text{approx}} = \sqrt{\frac{L_b^2 - 2L_b\pi(r_{p,\text{outer},\text{min}} + r_{s,\text{outer},\text{max}}) + \pi^2(r_{p,\text{outer},\text{min}} + r_{s,\text{outer},\text{max}})^2}{4} + (r_{s,\text{outer},\text{max}} - r_{p,\text{outer},\text{min}})^2}. \quad (\text{A.2.4})$$

This closed-form expression avoids the need for numerical root finding but neglects the $\sin^{-1}$ term in the exact constraint.

A.3 Error Analysis

We now evaluate the approximation error using parameter values from the physical CVT system considered in this work.

System Parameters

Parameter	Value	SI Value
Belt length L_b	37.538 in	0.9535 m
Belt height h_b	0.613 in	0.015 57 m
Groove half-angle β	11.5°	0.2007 rad
Inner primary radius	0.8125 in	0.020 637 5 m
Primary outer radius $r_{p,\text{outer},\text{min}}$	1.4255 in	0.036 21 m
Secondary outer radius $r_{s,\text{outer},\text{max}}$	4.0 in	0.1016 m

The primary outer radius is computed as the inner radius plus belt height: $r_{p,\text{outer},\text{min}} = 0.8125 + 0.613 = 1.4255$ in.

Computed Center Distances Solving the exact belt-length constraint ?? numerically yields

$$C_{\text{exact}} = 0.251\,74\,\text{m} \approx 9.911\,\text{in.}$$

Evaluating the approximate formula Equation (A.2.4) yields

$$C_{\text{approx}} = 0.268\,37\,\text{m} \approx 10.566\,\text{in.}$$

Error Metrics The absolute and relative errors are:

$$\Delta C = C_{\text{approx}} - C_{\text{exact}} = 0.016\,63\,\text{m} = 0.655\,\text{in}, \quad (\text{A.3.1})$$

$$\varepsilon_{\text{rel}} = \frac{\Delta C}{C_{\text{exact}}} = \frac{0.01663}{0.25174} = 6.61\%. \quad (\text{A.3.2})$$

Assessment The small-angle approximation introduces a relative error of nearly 7% in the center-to-center distance for this system. This error arises because the ratio

$$\frac{r_{s,\text{outer,max}} - r_{p,\text{outer,min}}}{C} = \frac{0.1016 - 0.03621}{0.25174} = 0.260$$

is not small. The assumption $\lambda \approx 0$ is therefore not justified for this CVT geometry.

Since the center distance C propagates into all subsequent geometric calculations—wrap angles, tangent span lengths, and derived quantities such as the transmission ratio—a 7% error in C can compound into larger errors in predicted system behavior.

A.4 Propagation to Secondary Radius and Transmission Ratio

To demonstrate how the center distance error propagates into operationally relevant quantities, we now examine the secondary radius and CVT ratio at two shift positions: zero shift and maximum shift.

A.4.1 Derivation of the Approximate Secondary Radius

Given a known primary outer radius $r_{p,\text{outer}}$ and center distance C , the secondary outer radius can be obtained by solving the belt-length constraint. Under the small-angle approximation [Equation \(A.1.1\)](#), this yields a closed-form expression.

Step 1: Isolate the square root. From [Equation \(A.1.1\)](#):

$$L_b - \pi(r_{p,\text{outer}} + r_{s,\text{outer}}) = 2\sqrt{C^2 - (r_{s,\text{outer}} - r_{p,\text{outer}})^2}. \quad (\text{A.4.1})$$

Step 2: Square both sides.

$$[L_b - \pi r_{p,\text{outer}} - \pi r_{s,\text{outer}}]^2 = 4[C^2 - (r_{s,\text{outer}} - r_{p,\text{outer}})^2]. \quad (\text{A.4.2})$$

Step 3: Expand and collect terms. Expanding the left side:

$$(L_b - \pi r_{p,\text{outer}})^2 - 2\pi(L_b - \pi r_{p,\text{outer}})r_{s,\text{outer}} + \pi^2 r_{s,\text{outer}}^2.$$

Expanding the right side:

$$4C^2 - 4r_{s,\text{outer}}^2 + 8r_{p,\text{outer}}r_{s,\text{outer}} - 4r_{p,\text{outer}}^2.$$

Collecting powers of $r_{s,\text{outer}}$ yields a quadratic equation:

$$(\pi^2 + 4)r_{s,\text{outer}}^2 - 2[\pi L_b - \pi^2 r_{p,\text{outer}} + 4r_{p,\text{outer}}]r_{s,\text{outer}} + [(L_b - \pi r_{p,\text{outer}})^2 + 4r_{p,\text{outer}}^2 - 4C^2] = 0. \quad (\text{A.4.3})$$

Step 4: Apply the quadratic formula. The physically meaningful root (smaller secondary radius for overdrive configuration) is

$$r_{s,\text{approx}} = \frac{\pi L_b + (4 - \pi^2)r_{p,\text{outer}} - 2\sqrt{(\pi^2 + 4)C^2 - L_b^2 + 4\pi L_b r_{p,\text{outer}} - 4\pi^2 r_{p,\text{outer}}^2}}{\pi^2 + 4}. \quad (\text{A.4.4})$$

This closed-form expression enables direct computation of the approximate secondary radius without numerical root finding.

A.4.2 Zero Shift Configuration

At zero shift, the CVT is in its lowest ratio (maximum reduction) configuration. This is also the geometry used to compute the approximate center distance C_{approx} , so much of that initial center-distance error cancels when the same configuration is used again to recover the secondary radius.

Primary Radius at Zero Shift At $s = 0$, the primary is within the deadzone, so from [Equation \(3.1.3\)](#):

$$r_{p,\text{outer}}(0) = r_{p,\text{outer},\text{min}} = 0.036\,21\text{ m}.$$

Secondary Radius Comparison Solving the exact belt-length constraint with C_{exact} yields

$$r_{s,\text{exact}} = 0.101\,60\text{ m}.$$

Evaluating the approximate formula [Equation \(A.4.4\)](#) with $C_{\text{approx}} = 0.268\,37\text{ m}$ yields

$$r_{s,\text{approx}} = 0.101\,60\text{ m}.$$

Transmission Ratio Error Computing effective radii with $h_b/2 = 0.007\,79\text{ m}$:

Quantity	Exact	Approximate
$r_{p,\text{eff}}$	0.0284 m	0.0284 m
$r_{s,\text{eff}}$	0.0938 m	0.0938 m
$R = r_{s,\text{eff}}/r_{p,\text{eff}}$	3.300	3.300

The ratio error at zero shift is

$$\varepsilon_R = \frac{|3.300 - 3.300|}{3.300} \approx 0.000\%.$$

Thus, although C_{approx} is already 6.61% too large, the induced error has little visible effect at minimum shift because the radius calculation is being evaluated at the same operating point used to construct that approximate center distance in the first place.

Figure A.1: Scaled diagram of the CVT at zero shift ($s = 0$). The primary pulley (left) and exact secondary pulley (right, solid line) are shown alongside the approximate secondary pulley (dotted line). The two solutions nearly overlap at this operating point, indicating negligible ratio error in this case.

A.4.3 Maximum Shift Configuration

At maximum shift, the primary and secondary pulleys are closest in size, representing a near-crossover configuration.

Primary Radius at Maximum Shift Using Equation (3.1.3) with $s = s_{\max} = 0.75 \text{ in} = 0.01905 \text{ m}$ and deadzone $s_{\text{dz}} = 0.0024892 \text{ m}$:

$$\begin{aligned}
r_{p,\text{outer}}(s_{\max}) &= r_{p,\text{outer},\min} + \frac{s_{\max} - s_{\text{dz}}}{2 \tan \beta} \\
&= 0.03621 + \frac{0.01905 - 0.0024892}{2 \times \tan(11.5^\circ)} \\
&= 0.03621 + \frac{0.01656}{0.4070} \\
&= 0.0769 \text{ m.}
\end{aligned} \tag{A.4.5}$$

Secondary Radius Comparison Solving the exact belt-length constraint ?? numerically with $C_{\text{exact}} = 0.25174 \text{ m}$ yields

$$r_{s,\text{exact}} = 0.06673 \text{ m.}$$

Evaluating the approximate formula Equation (A.4.4) with $C_{\text{approx}} = 0.26837 \text{ m}$ yields

$$r_{s,\text{approx}} = 0.05626 \text{ m.}$$

Transmission Ratio Error The CVT ratio is defined using effective radii, which account for belt seating depth (Equation (3.1.20)):

$$r_{\text{eff}} = r_{\text{outer}} - \frac{h_b}{2}.$$

With $h_b/2 = 0.00779 \text{ m}$:

Quantity	Exact	Approximate
$r_{p,\text{eff}}$	0.0691 m	0.0691 m
$r_{s,\text{eff}}$	0.0589 m	0.0485 m
$R = r_{s,\text{eff}}/r_{p,\text{eff}}$	0.853	0.701

Both models predict overdrive ($R < 1$), but the approximation substantially underestimates the ratio. The ratio error is

$$\varepsilon_R = \frac{|0.701 - 0.853|}{0.853} = 17.8\%.$$

Unlike the minimum-shift case, this operating point does not benefit from the same cancellation, so the center-distance error propagates into a much larger error in secondary radius and transmission ratio.

Figure A.2: Scaled diagram of the CVT at maximum shift ($s = s_{\max}$). The primary pulley (left) and exact secondary pulley (right, solid line) are shown alongside the approximate secondary pulley (dotted line). The approximation underestimates the secondary radius, leading to a lower predicted ratio than the exact model.

A.5 Summary of Approximation Errors

Configuration	R_{exact}	R_{approx}	Ratio Error
Zero shift ($s = 0$)	3.300	3.300	0.000%
Maximum shift ($s = s_{\text{max}}$)	0.853	0.701	17.8%

The small-angle approximation error is strongly operating-point dependent. At zero shift, most of the center-distance error cancels because the approximate center distance was itself constructed from that same geometry. At maximum shift, that cancellation is lost and the ratio error becomes substantial.

These errors arise from the initial 6.61% error in center distance, which propagates nonlinearly through the belt-length geometry in a state-dependent way. Since the transmission ratio directly enters the rotational equations of motion (Section 3.7), this approximation can still produce materially inaccurate dynamics near maximum shift.

This analysis justifies the use of exact numerical solutions for all geometric computations in this work.

Appendix B

Common Ramp Profile Designs

This appendix presents common ramp profile parameterizations for CVT primary pulley actuation. From [Equation \(3.2.8\)](#), the centrifugal axial force is

$$F_{p,\text{cent}}(s, \omega_p) = m_f \omega_p^2 (r_{f,0} + r_f(s)) \frac{dr_f}{ds}, \quad (\text{B.0.1})$$

where m_f is the flyweight mass, $r_{f,0}$ is the initial flyweight radius, and $r_f(s)$ is the radial displacement along the ramp as a function of axial shift s .

The profile $r_f(s)$ must satisfy the admissibility conditions from [Section 3.2](#): continuously differentiable, non-negative slope, and finite slope throughout $[0, s_{\text{max}}]$.

B.1 Linear Ramp

A linear ramp with slope k_r (radial displacement per unit axial shift):

$$r_f(s) = k_r \cdot s, \quad \frac{dr_f}{ds} = k_r = \text{const.} \quad (\text{B.1.1})$$

Substituting into [Equation \(B.0.1\)](#):

$$F_{p,\text{cent}}(s, \omega_p) = m_f \omega_p^2 k_r (r_{f,0} + k_r s) = m_f \omega_p^2 k_r r_{f,0} + m_f \omega_p^2 k_r^2 s. \quad (\text{B.1.2})$$

At constant ω_p , axial force increases linearly with s because the growing radius is multiplied by a constant slope. Simple to manufacture, but may cause aggressive shifting at high ratio.

B.2 Circular Arc Ramp

A circular arc ramp is designed to reduce force variation across the shift range by achieving *partial* cancellation. The key insight is to parameterize the arc by desired slope angles α_1 and α_2 at the start and end of the segment, where $|dr_f/ds| = \tan \alpha$ specifies the force multiplier. This provides direct control over actuation behavior at engagement (high slope) versus overdrive (low slope).

For a circle of radius R_c centered at (s_c, r_c) , the ramp profile satisfies:

$$(s - s_c)^2 + (r_f - r_c)^2 = R_c^2. \quad (\text{B.2.1})$$

Solving for $r_f(s)$ on the upper arc:

$$r_f(s) = r_c + \sqrt{R_c^2 - (s - s_c)^2}. \quad (\text{B.2.2})$$

Implicit differentiation yields:

$$\frac{dr_f}{ds} = \frac{-(s - s_c)}{\sqrt{R_c^2 - (s - s_c)^2}} = \frac{-(s - s_c)}{r_f - r_c}. \quad (\text{B.2.3})$$

Parameterization from slope angles. At any point on the arc where the local slope angle is α (i.e. $dr_f/ds = \tan \alpha$), the circle constraint combined with Equation (B.2.3) gives the parametric form:

$$s = s_c - R_c \sin \alpha, \quad r_f = r_c + R_c \cos \alpha. \quad (\text{B.2.4})$$

The slope angle α decreases monotonically from α_1 (entry) to $\alpha_2 < \alpha_1$ (exit) as s increases along the ramp. Applying Equation (B.2.4) at both boundary shifts s_1 and s_2 and subtracting:

$$s_2 - s_1 = R_c(\sin \alpha_1 - \sin \alpha_2). \quad (\text{B.2.5})$$

With $\Delta s = s_2 - s_1$ as the total axial span of the ramp segment, the arc radius and center are determined entirely by the two slope angles:

$$R_c = \frac{\Delta s}{\sin \alpha_1 - \sin \alpha_2}, \quad s_c = s_1 + R_c \sin \alpha_1. \quad (\text{B.2.6})$$

The boundary condition $r_f(s_1) = 0$ (flyweights at their initial radius at ramp entry) then fixes the radial center:

$$r_c = -R_c \cos \alpha_1. \quad (\text{B.2.7})$$

Substituting into Equation (B.0.1):

$$F_{p,\text{cent}}(s, \omega_p) = m_f \omega_p^2 (r_{f,0} + r_f) \cdot \frac{-(s - s_c)}{r_f - r_c}. \quad (\text{B.2.8})$$

To see the cancellation explicitly, split $r_{f,0} + r_f = (r_{f,0} + r_c) + (r_f - r_c)$:

$$\begin{aligned} F_{p,\text{cent}} &= m_f \omega_p^2 \left[\underbrace{(r_f - r_c)}_{\text{cancels}} \cdot \frac{-(s - s_c)}{r_f - r_c} + (r_{f,0} + r_c) \cdot \frac{-(s - s_c)}{r_f - r_c} \right] \\ &= -m_f \omega_p^2 (s - s_c) \left[1 + \frac{r_{f,0} + r_c}{r_f - r_c} \right]. \end{aligned} \quad (\text{B.2.9})$$

This form reveals the structure clearly. The dominant factor is $-(s - s_c)$, which is linear in shift: the $(r_f - r_c)$ terms cancel exactly in the first part of the split. The bracket $\left[1 + \frac{r_{f,0} + r_c}{r_f - r_c} \right]$ is a nonlinear correction multiplier. Using the parametric form Equation (B.2.4) with Equation (B.2.7), the bracket evaluates to

$$1 + \frac{r_{f,0} + r_c}{r_f - r_c} = 1 + \frac{r_{f,0} - R_c \cos \alpha_1}{R_c \cos \alpha}, \quad (\text{B.2.10})$$

where α is the local slope angle at shift s , sweeping from α_1 at entry to α_2 at exit. This makes the effective proportionality between force and $(s - s_c)$ position-dependent.

The numerator $r_{f,0} - R_c \cos \alpha_1$ is the key residual: it is controlled entirely by the choice of α_1 , α_2 , and Δs through $R_c = \Delta s / (\sin \alpha_1 - \sin \alpha_2)$. Increasing either α_1 or Δs raises R_c , making $R_c \cos \alpha_1$ larger and the residual smaller (or negative). The entry force scale, the exit force scale, and the degree of position-dependence between them are therefore all coupled to the same two angle choices. There is no freedom to set the overall force scale independently of the nonlinearity — changing α_1 and α_2 adjusts both simultaneously.

The condition $r_{f,0} = R_c \cos \alpha_1$ makes the residual zero, so the bracket equals 1 everywhere and force is exactly proportional to shift. This is the angle configuration at which the circular arc best approximates the hyperbolic ideal — it gives a practical design rule for tuning.

The practical consequence is important: at a fixed engine speed ω_p , the centrifugal force is approximately proportional to $(s - s_c)$, growing linearly with shift. This directly matches the linear restoring force of the primary spring (force $\propto k_s \cdot s$). A spring-loaded primary can therefore be tuned to balance the centrifugal flyweights at a target shift, and the linear character of the circular arc ensures the equilibrium is stable across the shift range rather than concentrated at a single point.

Circular arcs are widely used in practice due to ease of manufacture and sufficient compensation. The nonlinear residual is small when the ramp center offset $(r_{f,0} + r_c)$ is small relative to the arc radius R_c , but it cannot be eliminated entirely. The following section shows how to *exactly* achieve the linear target by choosing a different ramp geometry.

B.3 Hyperbolic Ramp (Perfect Cancellation)

From [Equation \(B.2.10\)](#), the circular arc force-to-shift proportionality constant is:

$$\frac{F_{p,\text{cent}}}{-m_f \omega_p^2 (s - s_c)} = 1 + \frac{r_{f,0} - R_c \cos \alpha_1}{R_c \cos \alpha}. \quad (\text{B.3.1})$$

This varies with position because α changes along the arc. The natural question is: what ramp profile makes this ratio a *true constant*? That constant is what we call K , and the profile that achieves it satisfies:

$$(r_{f,0} + r_f(s)) \frac{dr_f}{ds} = Ks, \quad (\text{B.3.2})$$

where $K > 0$. This produces centrifugal force exactly proportional to shift:

$$F_{p,\text{cent}}(s, \omega_p) = m_f \omega_p^2 K s. \quad (\text{B.3.3})$$

K is not a free parameter any more than R_c is for the circular arc: just as R_c is uniquely determined by α_1 , α_2 , and Δs ([Equation \(B.2.6\)](#)), K is uniquely determined by α_1 , α_2 , s_1 , and s_2 (derived in the parameterization below). What differs is not the design inputs, but that the hyperbolic profile makes K exactly constant along the entire ramp, whereas the circular arc's equivalent ratio changes with position.

Deriving the profile. Equation [\(B.3.2\)](#) is separable. Substituting $u = r_{f,0} + r_f$, so $du/ds = dr_f/ds$:

$$u du = Ks ds. \quad (\text{B.3.4})$$

Integrating both sides and writing the constant of integration as $\frac{1}{2}Ks_0^2$:

$$\frac{1}{2}u^2 = \frac{1}{2}K(s^2 + s_0^2). \quad (\text{B.3.5})$$

Substituting back $u = r_{f,0} + r_f$:

$$\boxed{(r_{f,0} + r_f(s))^2 = K(s^2 + s_0^2)}, \quad (\text{B.3.6})$$

giving the explicit profile:

$$r_f(s) = \sqrt{K(s^2 + s_0^2)} - r_{f,0}. \quad (\text{B.3.7})$$

In the (s, r_f) plane, the locus $(r_{f,0} + r_f)^2 = Ks^2$ (taking $s_0 = 0$) is a branch of a *hyperbola* — hence the name. Unlike the circular arc, where the residual multiplier in [Equation \(B.2.9\)](#) could not be removed, this profile forces the product $(r_{f,0} + r_f) \cdot dr_f/ds = Ks$ exactly for all s .

Local slope and its variation. To see how K relates to actual ramp angles, differentiate [Equation \(B.3.6\)](#) implicitly:

$$\frac{dr_f}{ds} = \frac{Ks}{r_{f,0} + r_f} = \frac{\sqrt{K} s}{\sqrt{s^2 + s_0^2}}. \quad (\text{B.3.8})$$

Since $dr_f/ds = \tan \alpha(s)$ by definition of the ramp slope angle, the local angle satisfies:

$$\tan \alpha(s) = \frac{\sqrt{K} s}{\sqrt{s^2 + s_0^2}}. \quad (\text{B.3.9})$$

Two observations follow. First, the slope is zero at $s = 0$ and grows monotonically toward the asymptote $\sqrt{K}$ as $s \rightarrow \infty$. This is the opposite trend from a circular arc, where the slope decreases from entry to exit. The reason is that the growing lever arm $(r_{f,0} + r_f)$ at large shift would otherwise amplify force super-linearly; a rising slope exactly compensates to keep the product Ks linear. Second, the asymptotic slope $\lim_{s \rightarrow \infty} \tan \alpha(s) = \sqrt{K}$ gives a simple interpretation: $K = \tan^2 \alpha_\infty$ where α_∞ is the slope the profile approaches at large shift.

Parameterization by entry and exit angles. Following the same convention as [Appendix B.2](#), specify desired slope angles α_1 and α_2 at entry shift s_1 and exit shift s_2 . From [Equation \(B.3.9\)](#):

$$\tan^2 \alpha_1 = \frac{Ks_1^2}{s_1^2 + s_0^2}, \quad \tan^2 \alpha_2 = \frac{Ks_2^2}{s_2^2 + s_0^2}. \quad (\text{B.3.10})$$

Dividing the two equations eliminates K :

$$\frac{\tan^2 \alpha_1}{\tan^2 \alpha_2} = \frac{s_1^2 (s_2^2 + s_0^2)}{s_2^2 (s_1^2 + s_0^2)}. \quad (\text{B.3.11})$$

Solving for s_0^2 :

$$s_0^2 = \frac{s_1^2 s_2^2 (\tan^2 \alpha_2 - \tan^2 \alpha_1)}{\tan^2 \alpha_1 s_2^2 - \tan^2 \alpha_2 s_1^2}. \quad (\text{B.3.12})$$

Then K follows from either condition in Equation (B.3.10):

$$K = \frac{\tan^2 \alpha_1 (s_1^2 + s_0^2)}{s_1^2}. \quad (\text{B.3.13})$$

For $s_0^2 > 0$ a consistent solution requires the numerator and denominator of Equation (B.3.12) to have the same sign. Since the hyperbolic slope increases with s (Eq. (B.3.8)), the physically consistent case is $\alpha_2 > \alpha_1$ (exit angle larger than entry), with $\tan^2 \alpha_1 s_2^2 > \tan^2 \alpha_2 s_1^2$ ensuring a positive denominator. No solution exists when the two angle conditions give a degenerate system ($\tan^2 \alpha_1 s_2^2 = \tan^2 \alpha_2 s_1^2$).

Practical impact. In most cases the difference between circular and hyperbolic profiles is negligible. For the specific ramps implemented in this work, the integrated force deviation across the full shift range is less than 1%. The hyperbolic derivation is nonetheless useful: it establishes the theoretical ideal and shows that the circular arc’s partial cancellation is not a fundamental limitation but rather a small correction from the constant offset ($r_{f,0} + r_c$).

Limitations. Both profiles address only the centrifugal force term. The secondary pulley torque feedback ($F_{s,\text{ax}}(s, \tau_s)$ in Equation (3.7.11)) introduces load-dependent nonlinear terms that no ramp geometry alone can cancel. Circular arcs therefore remain the practical standard—simpler to manufacture, well-understood, and sufficient given these irreducible secondary-side effects.

B.4 Piecewise Ramps and Smoothing

Any of the profiles above can be combined in a piecewise fashion: multiple linear segments, multiple circular arcs with different angle pairs, or a mix of profile types joined at transition shifts $s_1, s_2, \dots, s_{n-1}$. This allows region-specific tuning — steeper slopes at engagement, moderate for cruise, gentler near overdrive — without committing to a single global geometry.

Admissibility at junctions. The admissibility conditions from Section 3.2 require $r_f(s)$ to be continuously differentiable (C^1). A piecewise ramp satisfies C^0 by construction (the profile value is continuous if segments are joined at a common point), but slope continuity may be violated: if the left-segment slope at s_k differs from the right-segment slope, Eq. (B.0.1) gives a finite force jump at that point. No kinematic singularity occurs, but the force has a step discontinuity.

Numerical stiffness considerations. A sharp slope discontinuity is not the same as a smooth rapid transition: many real implementations use a finite but steep blend region, which the ODE solver sees as an extremely large second derivative $d^2 r_f / ds^2$ near the junction. This can create a locally stiff region and force an adaptive integrator to take very small steps near the knot, even if the discontinuity is physically mild. If simulation performance is a concern, slope transitions should be blended — a short circular arc segment tangent to both adjoining profiles is sufficient, as it restores C^1 continuity and bounds $d^2 r_f / ds^2$ throughout the ramp.

Appendix C

Numerical Methods Summary

This section documents the numerical algorithms used for belt-geometry root finding and dynamic simulation, including the specific tolerances, bracketing strategies, and solver configurations employed in the implementation.

C.1 Root Finding for Belt-Length Constraint

Given a known primary outer radius r_1 and fixed center-to-center distance C , the secondary outer radius r_2 is the unique root of the belt-length constraint. This scalar root problem is obtained by rearranging the exact belt length closure from ?? into the residual form:

$$g(r_2; r_1) = \pi(r_1 + r_2) + 2(r_2 - r_1) \arcsin\left(\frac{r_2 - r_1}{C}\right) + 2\sqrt{C^2 - (r_2 - r_1)^2} - L_b = 0, \quad (\text{C.1.1})$$

where L_b is the fixed belt length. A separate invocation solves for the center-to-center distance C itself at initialization, using the same equation evaluated at the boundary radii $(r_{1,\min}, r_{2,\max})$ with C as the unknown; this is exactly the initialization step implied by ?? before the ratio law [Equation \(3.7.2\)](#) can be evaluated over the shift range.

Bracketing strategy. The arcsin term in [Equation \(C.1.1\)](#) is real only when $|r_2 - r_1| \leq C$, so the natural domain for r_2 is the open interval $(r_1 - C, r_1 + C)$. Within this interval a sign change is guaranteed: at the lower boundary $r_2 \rightarrow r_1 - C$, the arcsin saturates to $-\pi/2$ and the square root vanishes, giving $g \rightarrow 2\pi r_1 - 2\pi C - L_b < 0$ for all physically valid parameters. At the upper boundary $r_2 \rightarrow r_1 + C$, by symmetry $g \rightarrow 2\pi r_1 + 2\pi C - L_b > 0$, satisfied whenever the belt length is less than the circumference subtended by the wider pulley pair — a requirement any real CVT must satisfy. A small safety margin $\varepsilon = 10^{-9}$ m is applied at both ends to keep arcsin away from its domain boundary where the function becomes numerically steep.

For center-to-center distance solving, the bracket is instead the interval $(\Delta r + \varepsilon, L_b/2)$, where $\Delta r = |r_{2,\text{eff}} - r_{1,\text{eff}}|$ is the effective-radius difference at the boundary configuration. The lower bound ensures arcsin is defined; the upper bound is a conservative geometric limit (a straight two-span belt cannot exceed L_b across a gap of $L_b/2$). Both brackets are validated by an explicit sign-change check before invoking the solver, so any failure to bracket immediately identifies an infeasible geometry rather than producing a silent wrong answer.

Brent’s method. Both roots are found using `scipy.optimize.brentq`, an implementation of Brent’s algorithm [Brent \(1973\)](#). The method combines three strategies: bisection (guaranteed bracket-halving), secant interpolation (superlinear convergence near smooth roots), and inverse quadratic interpolation (order- ≈ 1.84 convergence when three previous iterates are well-conditioned). Whenever the faster interpolation steps would place the next iterate outside the current bracket, the algorithm falls back to bisection, preserving the worst-case $O(\log_2(1/\varepsilon))$ guarantee of pure bisection. Because the sign-change brackets described above are guaranteed for all valid CVT geometries, `brentq` is certain to converge. Both root solves use an absolute tolerance of 10^{-9} m, well below any physically meaningful length precision.

C.2 ODE Integration for Dynamic Simulation

The full CVT state vector $\mathbf{x} = (\omega_p, \omega_s, s, \dot{s}, v_b)$ is integrated using `scipy.integrate.solve_ivp`. The governing system is written as a first-order ODE system in [Equation \(3.7.13\)](#), with rotational sub-equations [Equation \(3.7.8\)](#) and [Equation \(3.7.9\)](#), axial dynamics [Equation \(3.7.11\)](#), belt-speed dynamics for v_b , and algebraic geometry closures [Equation \(3.7.2\)](#) and [Equation \(3.7.3\)](#). Although [Equation \(3.7.11\)](#) is second-order in s , introducing $(s, \dot{s})$ as separate states converts the complete model to first-order form for time integration. The time integrator is used with the RK45 method — the Dormand–Prince explicit embedded Runge–Kutta pair [Dormand and Prince \(1980\)](#). The method propagates the state with a 5th-order formula and simultaneously computes a 4th-order companion estimate for local error control, using the same six function evaluations. The tableau is FSAL (first-same-as-last): the final stage of each accepted step is reused as the first stage of the next, so only five new evaluations are needed per step in steady operation.

Adaptive step size control. At each candidate step the per-component local error estimate $\hat{e}_i$ is compared to a mixed tolerance threshold. A step is accepted when

$$\max_i \frac{|\hat{e}_i|}{\text{atol} + \text{rtol} \cdot |y_i|} \leq 1, \quad (\text{C.2.1})$$

and the next step size is scaled proportionally to $(\text{tol}/\hat{e})^{1/5}$. The tolerances used in this work are $\text{atol} = 10^{-6}$ and $\text{rtol} = 10^{-4}$ ([Table C.1](#)). The absolute floor prevents spurious step rejection when a state variable passes through zero (e.g. $\dot{s} \approx 0$ at shift equilibrium or $\omega_p \approx 0$ at engine start), where a purely relative criterion would demand unreachable accuracy.

Parameter	Value	Interpretation
<code>atol</code>	10^{-6}	absolute floor: 1 μm on s , 1 prad/s on ω
<code>rtol</code>	10^{-4}	relative tolerance: 0.01% of current state magnitude
<code>t_eval</code>	10 000 pts	uniform output grid over 30 s

Table C.1: ODE solver tolerance parameters.

Event detection. Phase transitions (shift engagement, boundary contact, back-shift onset) are located using `solve_ivp`’s event mechanism. These events correspond to qualitative changes in the dynamics around the bounded shift coordinate used in [Equation \(3.7.11\)](#) and the full state evolution in [Equation \(3.7.13\)](#). After each accepted step the solver evaluates the event functions on

a degree-4 dense-output interpolant and applies a root-finding pass to detect any sign change within the step. When a crossing is found it is bracketed at sub-tolerance precision before being reported, so transitions are located with the same accuracy as the integration tolerance rather than being snapped to the coarse output grid.

Phase splitting at hard constraints. The shift bounds $s \in [0, s_{\max}]$ with $\dot{s} = 0$ at both endpoints are handled by partitioning the trajectory into separate `solve_ivp` calls rather than imposing inequality constraints inside the ODE. Each phase — normal shifting, clamped-at-maximum, and back-shifting — presents a smooth right-hand side to the integrator, allowing RK45 to operate at full 5th-order accuracy throughout. The terminal event of each phase supplies the initial condition of the next. This is numerically cleaner than directly clamping [Equation \(3.7.11\)](#) inside a single solve because it preserves a smooth right-hand side within each phase. Up to ten alternating full-shift / back-shift cycles are supported before the simulation terminates, preventing unbounded phase loops for unusual parameter regimes.

C.3 Slip-Law Regularization and Blend Parameter Selection

The traction law in [Equation \(3.6.9\)](#) is physically clear but discontinuous at $v_{\text{rel}} = 0$, which can induce step-size chatter near stick-slip transitions. A practical regularized formulation uses three ideas: a smooth saturation law, a clamped no-slip torque request, and a blending rule between those two limits.

First define a smooth saturation torque

$$\tau_{\text{sat}} = \tau_{\max} \tanh\left(\frac{v_{\text{rel}}}{v_{\text{smooth}}}\right), \quad (\text{C.3.1})$$

where $v_{\text{smooth}} > 0$ sets the transition width in slip-speed units. For $|v_{\text{rel}}| \gg v_{\text{smooth}}$, this approaches the usual friction-limited value $\pm\tau_{\max}$, while near zero it removes the sharp sign discontinuity.

Next, clamp the no-slip torque request:

$$\tau_{\text{req}} = \text{clip}(\tau_{\text{ns}}, -\tau_{\max}, \tau_{\max}). \quad (\text{C.3.2})$$

This is the largest admissible torque consistent with the no-slip request, without allowing the requested value to exceed traction capacity.

Then define the blend factor

$$\alpha = \text{clip}\left(\frac{|v_{\text{rel}}|}{v_{\text{blend}}}, 0, 1\right), \quad (\text{C.3.3})$$

with $v_{\text{blend}} > 0$ defining the width of the blending region, and use the transmitted torque

$$\tau_c = (1 - \alpha) \tau_{\text{req}} + \alpha \tau_{\text{sat}}. \quad (\text{C.3.4})$$

This has a useful interpretation. For very small mismatch, $\alpha \approx 0$, so the model stays close to the clamped no-slip demand. For larger mismatch, $\alpha \rightarrow 1$, so the law transitions to the smooth Coulomb limit. In other words, the regularized model behaves like a requested no-slip torque near stick and like a friction-limited sliding law once the mismatch becomes appreciable.

How to choose v_{smooth} . Choose the smoothing scale small enough that $\tanh(v_{\text{rel}}/v_{\text{smooth}})$ is close to a sign law through most of the slip regime, but not so small that the solver again sees an effectively discontinuous transition. A practical workflow is:

1. Start with v_{smooth} around 0.5–2% of a representative relative-speed magnitude seen during actual slip.
2. Decrease it until predicted macro outputs (ratio trajectory, launch time, peak speeds) stop changing materially.
3. Increase it slightly if event localization or adaptive step-size behavior becomes noisy near $v_{\text{rel}} \approx 0$.

The blend scale v_{blend} should generally be chosen greater than or equal to v_{smooth} , so that the handoff from clamped demand to the smooth Coulomb limit is not sharper than the smoothing law itself.