


Zombee LilyGo pinout

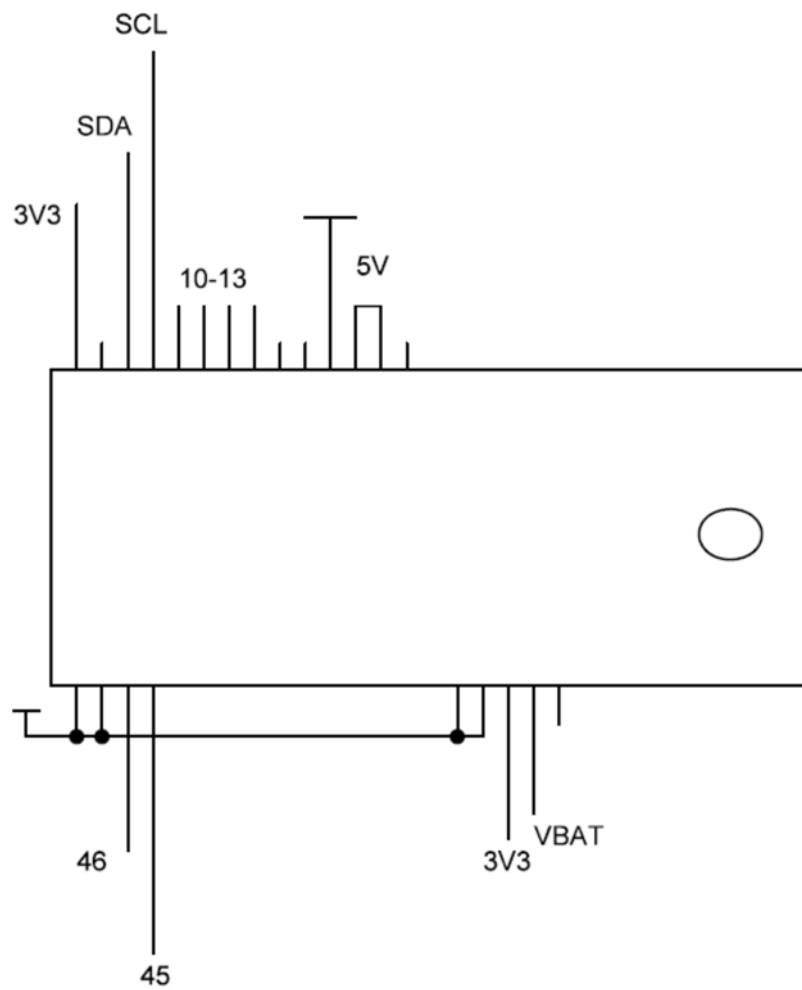

GPIO2 – SDA i2c;
GPIO3 – SCL i2c;
GPIO12 – Enable for additional voltage (LED, Audio);
GPIO13 – INT from accelerometer;
GPIO14 – DOUT sound signal for Audio;
GPIO15 – BCLK for Audio;
GPIO16 – LRC signal for Audio;
GPIO43 – TX debug UART;
GPIO44 – RX debug UART;
GPIO45 – Buzzer enable;
GPIO46 – LED control.