




Product characteristics:

Transformer model	Single-phase	CBST												
Capacity	VA	40	63	100	150	200	250	300	400	500	630	800	1000	1600
Meeting Standards		IEC 61558-2-4 ,EN 61558-2-4 ,UL5085												
Product Certification		 												
Rated input voltage	V	AC600V and below												
Frequency	Hz	50/60												
Rated output voltage	V	AC600V and below												
No-load current	%	40	36	30	28	26	25	23	22	20	17	15	12	12
No-load loss	W	4.5	5.6	7.1	9.1	10.6	12.5	13.8	15.5	16	19	22	31	32
Load loss	W	10.1	13.4	16.8	21.6	25.1	29.6	33	36	38	44	53	72	74
Efficiency	%	84	84	86	88	88	90	90	92	92	92	92	93	93
Insulation strength	DC 500V	≥100MΩ												
Dielectric strength	Vrms	4000												
Insulation level		F												
Protection level		IP00												
Noise	dB	≤60												
Installation method		waist-type hole												
Horizontal running position		Reduce capacity by 90%												
Protective treatment		"TC"												
Ambient operating temperature	°C	-20...+50												
Ambient storage temperature	°C	-40...+80												
Connection		Equipped with screw type terminals												


Outline drawing and installation dimensions (mm)

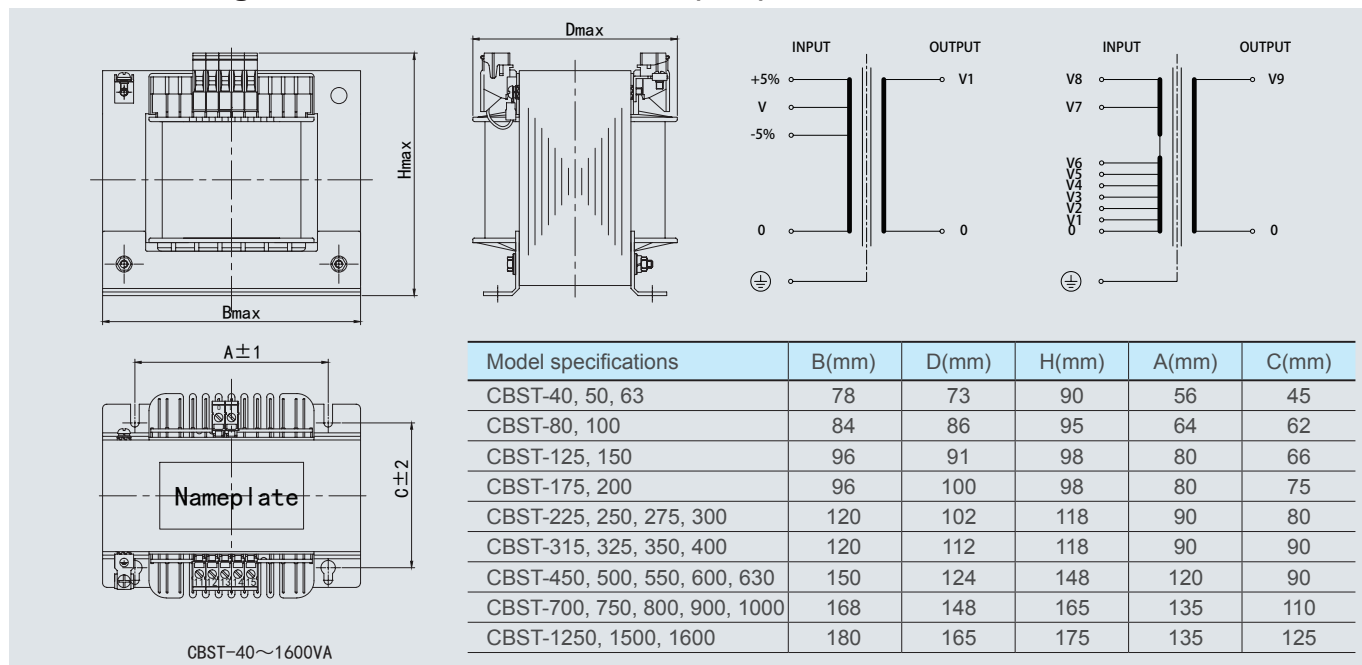

Product characteristics:

Transformer model	Single-phase	CBST												
Capacity	VA	1750	2000	2500	3000	3250	4000	5000	5500	6000	6600	7500	8000	10000
Meeting Standards		IEC 61558-2-4, EN 61558-2-4, UL5085												
Product Certification														
Rated input voltage	V	AC600V or less												
Frequency	Hz	50/60												
Rated output voltage	V	AC600V or less												
No-load current	%	11	11	10	10	10	9	9	9	9	8	8	8	7
No-load loss	W	37	37	48	55	55	68	70	83	88	95	96	99	110
Load loss	W	84	86	108	123	128	151	162	188	205	240	243	252	264
Efficiency	%	94	94	95	95	95	95	95	95	95	96	96	96	96
Insulation strength	DC 500V	$\geq 100M\Omega$												
Dielectric strength	Vrms	4000												
Insulation level		F												
Protection level		IP00												
Noise	dB	≤ 60												
Installation method		waist-type hole												
Horizontal running position		Reduce capacity by 90%												
Protective treatment		"TC"												
Ambient operating temperature	°C	-20...+50												
Ambient storage temperature	°C	-40...+80												
Connection		Equipped with screw type terminals												

Outline drawing and installation dimensions (mm)

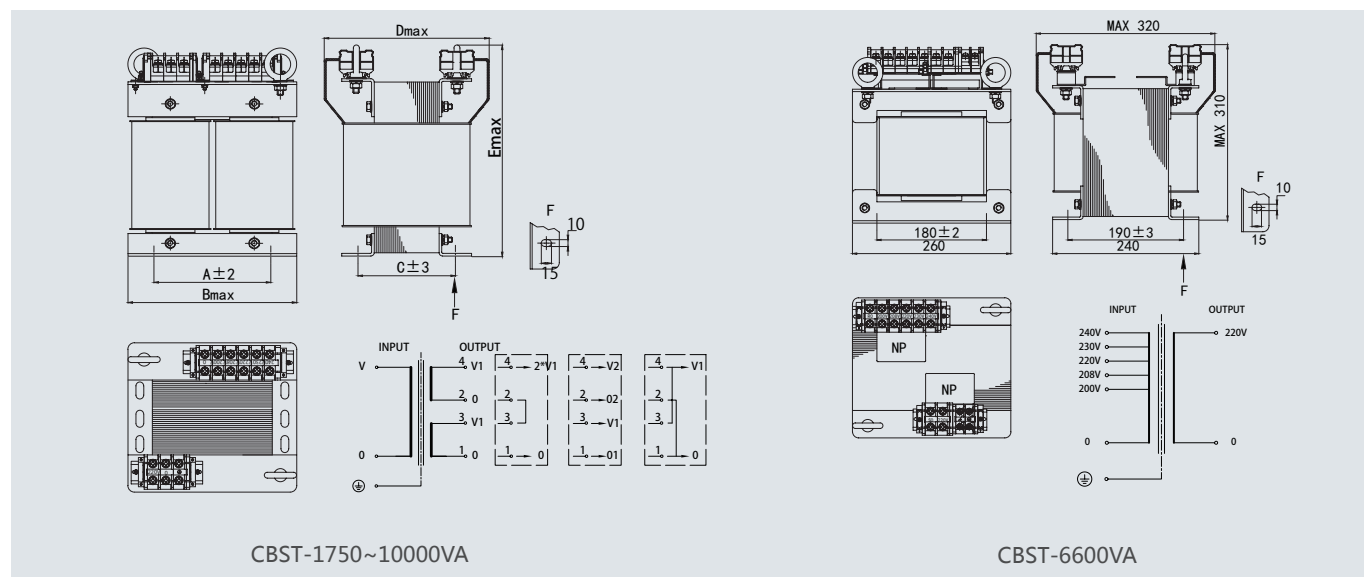


Model specifications	B(mm)	D(mm)	H(mm)	A(mm)	C(mm)
CBST-1750, 2000, 2250	200	260	320	140	123
CBST-2500, 3000	200	280	320	140	133
CBST-3250, 3750, 4000	240	290	380	140	130
CBST-4500, 5000	240	300	380	140	140
CBST-5500, 6000, 6300	240	310	380	140	150
CBST-7000, 7500, 7800, 8000	280	310	420	180	155
CBST-8500, 9000, 9500, 10000	280	320	420	180	175

Product characteristics:

Transformer model	Three phase	CBTT												
Capacity	kVA	1	1.6	2	2.5	3	4	5	6.3	8	10	16	20	25
Meeting Standards		IEC 61558-2-4, EN 61558-2-4, UL5085												
Product Certification		 												
Rated input voltage	V	AC600V and below												
Frequency	Hz	50/60												
Rated output voltage	V	AC600V and below												
No-load current	%	18	17	15	13	12	11	11	10	8	7	6	5.5	5.5
No-load loss	W	32	45	60	70	80	95	105	125	140	170	225	300	315
Load loss	W	75	100	120	140	160	190	220	260	290	410	560	720	745
Efficiency	%	91	91	91	91	91	92	92	92	92	92	92	93	93
Insulation strength	DC 500V	≥100MΩ												
Dielectric strength	Vrms	4000												
Insulation level		F												
Protection level		IP00												
Noise	dB	≤60												
Installation method		waist-type hole												
Horizontal running position		Reduce capacity by 90%												
Protective treatment		"TC"												
Ambient operating temperature	°C	-20...+50												
Ambient storage temperature	°C	-40...+80												
Connection		Equipped with screw type terminals												

Outline drawing and installation dimensions (mm)

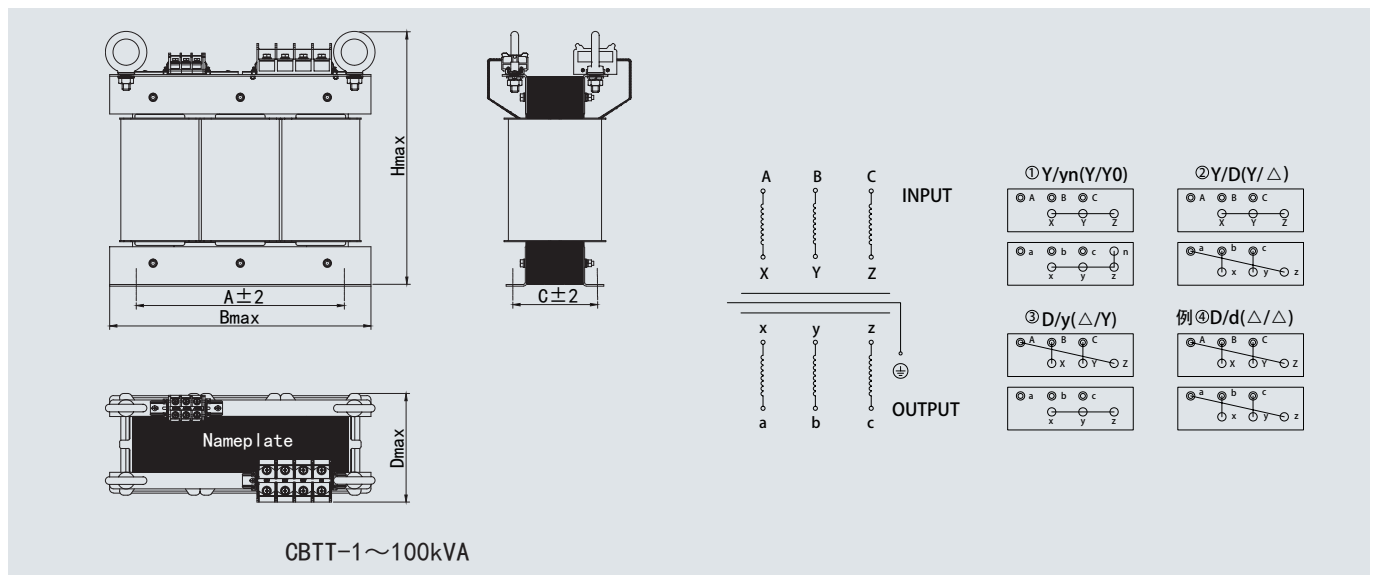


Model specifications	B(mm)	D(mm)	H(mm)	A(mm)	C(mm)	Protective housing size (mm)
CBTT-1, 1.5, 1.6	230	200	240	180	100	400×380×450
CBTT-2, 2.5	270	240	280	200	110	400×380×450
CBTT-3, 4, 4.4	300	260	330	260	120	450×380×480
CBTT-5, 6, 6.3	360	300	400	260	130	530×420×600
CBTT-7, 7.8, 8, 10, 10.5	420	360	450	320	150	560×450×620
CBTT-15, 16, 20, 25	500	420	510	360	175	600×450×640
CBTT-30, 35, 40	550	480	560	400	180	720×500×680
CBTT-45, 50, 60, 63	600	500	610	450	200	900×550×850
CBTT-75, 80, 90, 100	750	550	740	550	220	1050×620×950

Product characteristics:

Transformer model	Three phase	CBTT															
Capacity	kVA	30	35	40	45	50	63	80	100	125	160	200	250	315	400	500	
Meeting Standards		IEC 61558-2-4, EN 61558-2-4, UL5085															
Product Certification																	
Rated input voltage	V	AC600V and below															
Frequency	Hz	50/60															
Rated output voltage	V	AC600V and below															
No-load current	%	5	4.5	4.5	4	4	3.5	3.2	3	3	2.5	2.2	2	1.8	1.6	1.5	
No-load loss	W	355	390	425	510	560	680	760	880	1050	1250	1520	1850	2200	3150	3800	
Load loss	W	920	1015	1140	1230	1400	1620	1610	2150	2450	2650	3200	3800	4400	6500	8200	
Efficiency	%	95	95	95	95	95	95	96	96	96	96	96	97	97	97	97	
Insulation strength	DC 500V	≥100MΩ															
Dielectric strength	Vrms	4000															
Insulation level		F															
Protection level		IP00															
Noise	dB	≤60															
Installation method		waist-type hole															
Horizontal running position		Reduce capacity by 90%															
Protective treatment		"TC"															
Ambient operating temperature	°C	-20...+50															
Ambient storage temperature	°C	-40...+80															
Connection		Equipped with screw type terminals															

Outline drawing and installation dimensions (mm)

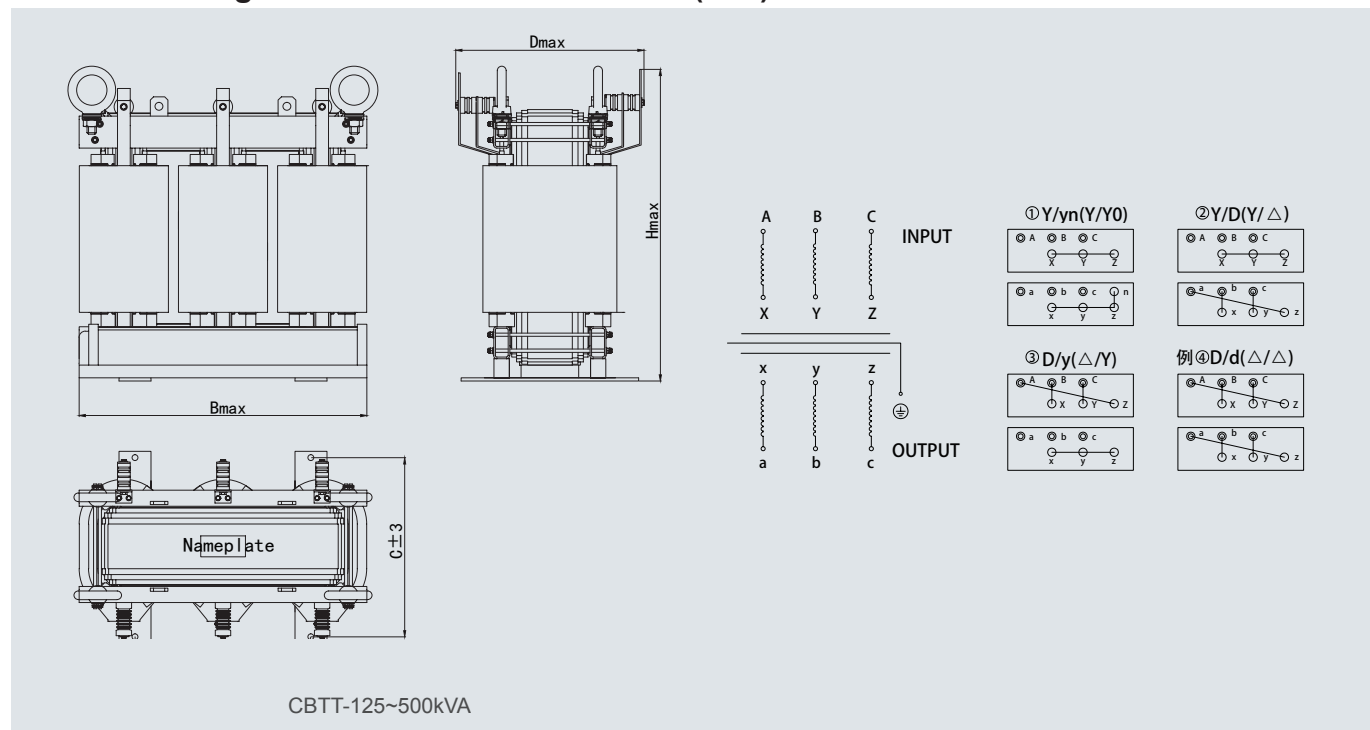

Model specifications	B(mm)	D(mm)	H(mm)	A(mm)	C(mm)	Protective housing size (mm)
CBTT-125, 150, 160	1000	580	860	550	400	1250×700×1150
CBTT-180, 200	1060	600	920	650	400	1400×800×1260
CBTT-250, 300, 315	1120	640	980	650	450	1500×800×1350
CBTT-400, 500	1200	700	1050	750	450	1600×850×1400