



GLOBAL POWER ENERGY SYSTEM SOLUTION SUPPLIER



JIEZOU POWER

www.jiezoupower.com



GLOBAL FOOTPRINT







RELIABLE

EFFICIENT

PROFESSIONAL



COMPANY PROFILE

JIEZOU POWER, a professional designer, manufacturer and installer of power system solution around the World, was founded in 2021 year, occupies 200,000 square meters.

JIEZOU POWER, mainly manages power grid projects, 1000KV EPC, 1000KV hydroelectric power plant, 1000KV power substation, etc.

JIEZOU POWER factory can manufacture oil type and dry type distribution transformer, max 1000KV 1000MVA power transformer, GIS, switchgear, substation, based on ANSI/IEEE/DOE2016/CSA/IEC60076 standard.

JIEZOU POWER successively obtain ISO9001, ISO14001, ISO45001, UL, CUL, CSA certificate; SGS, TUV, INTERTEK, TYPE TEST REPORT.

Until 2023 year, worldwide branch companies and factories are distributed in United States, Canada, Dubai, Dominican Republic, Philippines, Serbia, USA, El Salvador, Ecuador, South Africa, Netherlands, Chinese branch factories and companies are in TaiZhou city, Headquarters in Suzhou city

Looking into the future, JIEZOU POWER's vision is to be the most trusted power system solution provider, solve the World's most urgent power management challenges, accelerate the planet's transition to renewable energy. So that everyone can have a more low-carbon and bright life. To this end, we will do our utmost to make efforts.

VISION

To be the most trusted power system solution provider

AIM

Product quality without complaints,
Customer service with profession

MISSION

Accelerate the planet's transition to renewable energy,
Create a low-carbon energy life for everyone

No.1

The biggest manufacturer and exporter of IEEE/ANSI/DOE2016/IEC standard transformers and electric equipment in China.

24H

24-hour response, providing solution less than 24 hours.

100+

More than 100 patents in fields of transformer and electric equipment technology, material, design, research&development.

100,000+








More than 100,000 units of transformers and electric equipment have been sold Worldwide.

200,000+

More than 200000 square meters production site.

20,000,000+

More than 20,000,000 dollars annual investment in technology research and development.

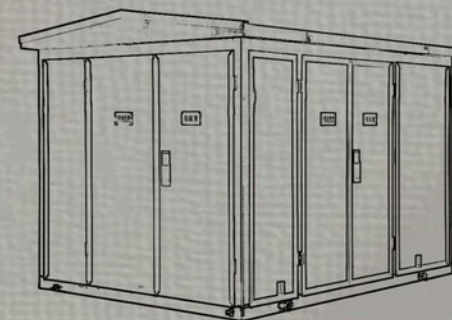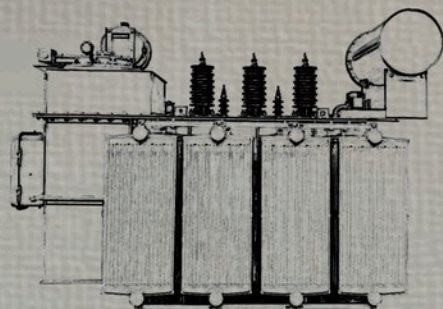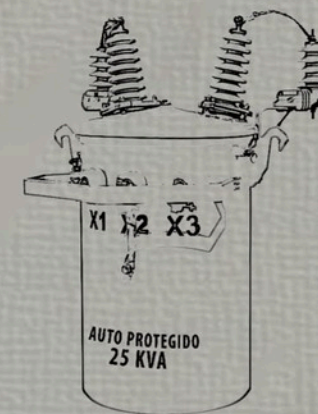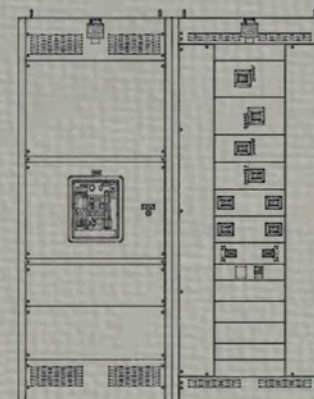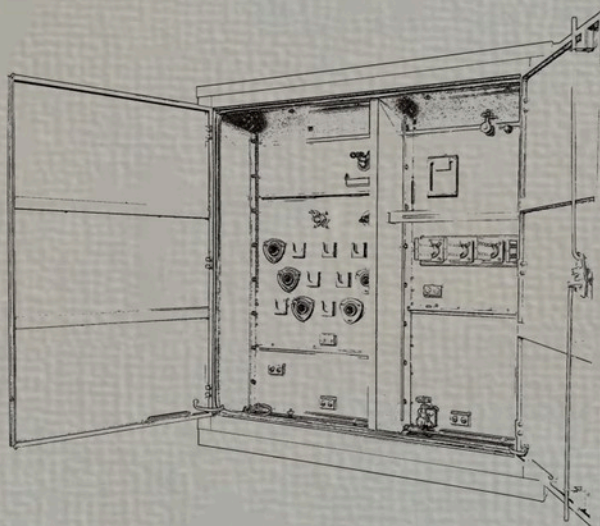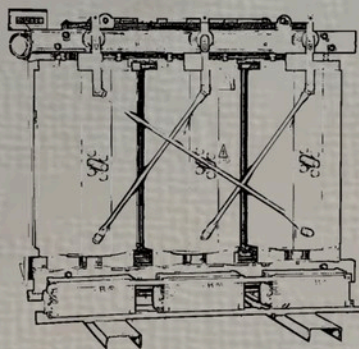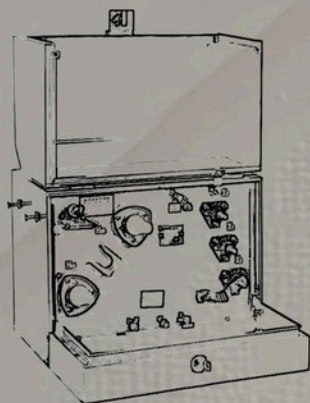

patience

humble

enthusiasm

RELIABLE

ENTHUSIASM

reliable

HUMBLE

professional



Safe

We have more advanced design concepts and production processes, and strict quality control procedures. Also have complete and effective quality control system and test system, strictly based on IEC , IEEE , ANSI, DOE,ISO, UL,cUL, CE,CSA standard, etc.



Reliable

Provide insured & Reliable equipments and services have benefited us and our customers for the past 10 years or more. JIEZOU POWER attach great importance to the after-sales service system. In light of this point, we have established branches in the United States, Canada, Dubai, Dominican Republic, Philippines and other countries to ensure the well operation of equipment during the warranty period.



High-efficiency

24-hour response.
Providing solution less than 24 hours.



Customized and Dedicated

We can customize the products according to customer's requirements, such as the capacity, the high and low voltage, the appearance and color, the requirements of different brands, the accessories of the products and so on. According to different electric requirement, the equipment was produced according to various international standards: ANSI, IEC, IEEE, CSA etc. Coordination of factory and third party laboratories guarantee the accomplishment of varieties of standards and quality.



Professional

More than 100 engineers, to provide technical service with the most advanced technological levels. JIEZOU POWER has been engaged in HV electric field and served clients from various countries since 2021. Over 30 years of international experience on electric power fields including power substation, distribution system, transmission lines makes us confident of participating and completing electric project.



Resources Integration

JIEZOU POWER provides mature supply management for clients, we integrated beneficial resources from production, transportation, shipping, delivery, which will guarantee the process operation and also achieve good cost control.



• SINGLE PHASE POLE MOUNTED TRANSFORMER




◆ Definition

Single-phase pole mounted transformer serve as distribution transformer in the distribution network of decentralized power supply, it has many advantages, such as reducing the length of low-voltage distribution line losses and improving the power supply efficiency.

It is designed with high-efficiency and energy-saving wound core structure, featuring pole-type suspension installation, small volume, small capital investment, shorter low-voltage power supply radius, and over 99% reduction in low-voltage line loss. With a fully sealed structure, the transformer has strong overload capability, high reliability in continue operating and easy to maintenance.

◆ Structure

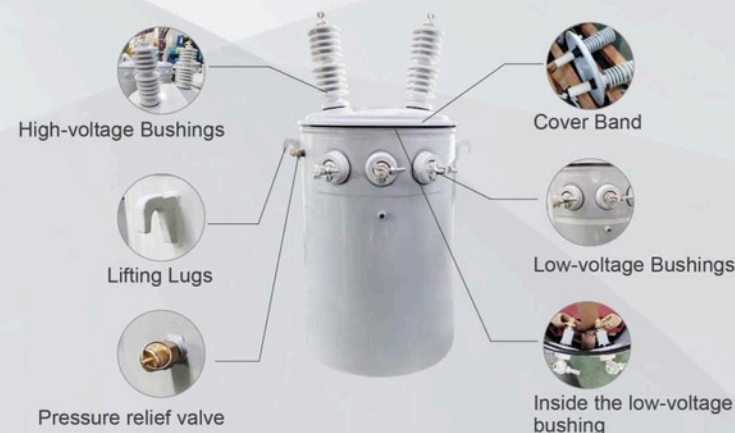


◆ Technical Data For Single-Phase Pole Mounted Distribution Transformer

Capacity (KVA)	High Voltage (V)	Tapping Ranges	Low Voltage (V)	Loss (W)		Dimension (mm)			DOE2016 Efficiency
				No-load Loss (W)	On-load Loss (W)	W	D	H	
15									98.82
25	2400		110						98.95
37.5	4160		120						99.05
50	7200		208						
	7620		240	60	330	520	565	905	99.11
75	12000		277	80	370	560	590	935	
	12470		347	100	450	610	625	935	99.19
100	13200	±2x2.5%	415	120	620	635	975	1035	
	13800		416	130	850	754	840	1035	99.25
167	14400		480	150	1150	770	965	1135	99.33
	19920		600			795	890	1135	
250	24940		690						99.39
333	34500								99.43
500									99.49

• SINGLE PHASE PAD MOUNTED TRANSFORMER



◆ Structure

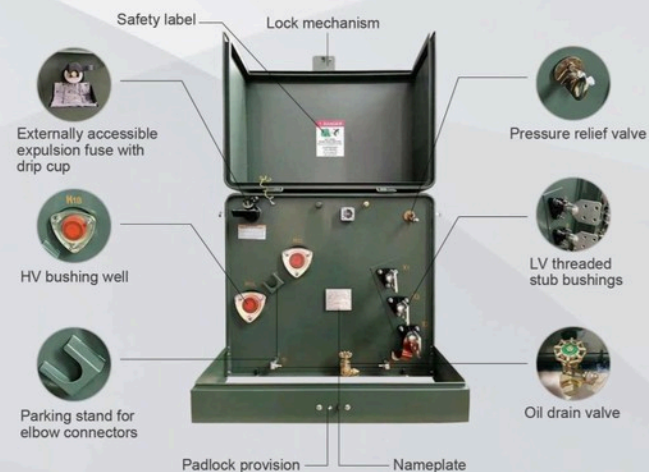

◆ Definition

Single-phase pad-mounted transformer is the type with a clamshell cabinet for ease to opening and uninhibited access to connection. Versatility of the design allows for various protection and switching configuration.

It provides multi-service options while meeting the reliability and safety requirements of any distribution system. It has various ratings and with wide range of advanced configurations to meet customer's demands.

◆ Specification of 10kva to 167kva

Capacity (KVA)	High Voltage (V)	Tapping Ranges	Low Voltage (V)	Loss (W)		Dimension (mm)			DOE2016 Efficiency
				No-load Loss (W)	On-load Loss (W)	W	D	H	
15	2400 4160 7200 7620 12000 12470 13200 13800 14400 19920 24940 34500	±2x2.5%	110	60 80 100 120 130 150	330 370 450 620 850 1150	610 610 610 610 610 740	740 740 760 810 960 940	840 840 840 840 840 840	98.82
25			120						98.95
37.5			208						99.05
50			240						99.11
75			277						99.19
100			347						99.25
167			415						99.33
250			416						99.39
333			480						99.43
500			600 690						99.49

• THREE PHASE PAD MOUNTED TRANSFORMER



▲ Loop Feed Pad Mounted Transformer



▲ Radial Feed Pad Mounted Transformer

◆ Definition

Three phase pad mounted transformers are designed and manufactured in compliance with all applicable ANSI and DOE2016 standards. All transformers are oil-filled, 65°C rise, and designed for usual service conditions per IEEE C57.12.00.

Ratings available are 30 through 3000 kVA with primary voltages 2.4 through 35 kV (150 kV BIL) and secondary voltages up to 600 volts. All standard tap configurations available: dual voltage in most combinations, dual voltage with taps only (series connection only) and impedance and loss options available in most designs.

◆ Structure



◆ Technical Specification

Rated Capacity (KVA)	Voltage Combined		Vector-group	No-load Loss (w)	Load Loss at 85°C(w)	Impedance (%)	Efficiency (%)
	High Voltage (V)	Low Voltage (V)					
75				130	1000		99.03
150				200	1800		99.16
225	2400	110		350	3100		99.23
300	4160	120		430	3700		99.27
500	7200	208		600	5410		99.35
750	7620	240		880	7500		99.4
1000	12000	277		1000	10300		99.43
1500	12470	347	YNyn0 Dyn1	1400	14500	4.0-6.3	99.48
2000	13200	415		1800	18300		99.51
2500	13800	416		2300	23100		99.53
3150	14400	480					
3750	19920	600					
	24940	690					
	34500						

• DRY TYPE TRANSFORMER



▲ Dry type transformer — Epoxy resin type

◆ Definition

Cast resin dry type transformer is a type of SC(B) dry transformer with epoxy resin, which is a widely used in many fields. Its winding surface consists of high-quality protective material that forms the cover.

Even in harsh environments such as dust and humidity, it will not affect the cast insulating dry-type transformer; the process characteristic of resin casting is that it must rely on molds and use special casting equipment to cast the coil in a vacuum state. The epoxy resin used is an insulating glue, so it is also called an epoxy cast resin dry type transformer.

◆ Structure



◆ Technical Specification

① Type 14 of 6kV, 10kV dry-type no-excitation distribution transformers Technical Date Sheet

Rated Capacity (kVA)	Voltage Combination			Vector Group	No-load Loss (w)	Under different insulation heat-resisting rank load loss(W)			No-load Current(%)	Short Circuit Impedance(%)
	HV (KV)	HV (Tapping)	LV (KV)			130°C(B) (100°C)	155°C(F) (120°C)	180° C(H) (145°C)		
30	6 6.3 6.6 10 10.5 11	±5% ±2x2.5%	0.4	Dyn11 Yyn0	130	605	640	685	2.00	4
50					185	845	900	965	2.00	
80					250	1160	1240	1330	1.50	
100					270	1330	1415	1520	1.50	
125					320	1565	1665	1780	1.30	
160					365	1800	1915	2050	1.30	
200					420	2135	2275	2440	1.10	
250					490	2330	2485	2665	1.10	
315					600	2945	3125	3355	1.00	
400					665	3375	3590	3850	1.00	
500					790	4130	4390	4705	1.00	
630					910	4975	5290	5660	0.85	
630					885	5050	5365	5760	0.85	
800					1035	5895	6265	6715	0.85	
1000					1205	6885	7315	7885	0.85	
1250					1420	8190	8720	9335	0.85	6
1600					1665	9945	10555	11320	0.85	
2000					2075	12240	13005	14005	0.70	
2500					2450	14535	15445	16605	0.70	

• DRY TYPE TRANSFORMER

② 20kV the level SC(B) 10 series no-excitation dry type distribution transformer performance parameter

Rated Capacity (kVA)	Voltage Combination			Vector Group	No-load Loss (w)	Under different insulation heat-resisting rank load loss(W)			No-load Current(%)	Short Circuit Impedance(%)
	HV (KV)	HV (Tapping)	LV (KV)			130°C(B) (100°C)	155°C(F) (120°C)	180° C(H) (145°C)		
50	20 22 24	±2x2.5% ±5%	0.4	Dyn11 Yyn0	340	1160	1230	1310	2.00	6
100					540	1870	1990	2130	1.80	
160					670	2330	2470	2640	1.60	
200					730	2770	2940	3140	1.60	
250					840	3220	3420	3660	1.30	
315					970	3850	4080	4360	1.30	
400					1150	4650	4840	5180	1.10	
500					1350	5460	5790	6190	1.10	
630					1530	6450	6840	7320	1.00	
800					1750	7790	8260	8840	1.00	
1000					2070	9220	9780	10400	0.85	
1250					2380	10800	11500	12300	0.85	
1600					2790	13000	13800	14800	0.85	
2000					3240	15400	16300	17500	0.70	
2500					3870	18200	19300	20700	0.70	
2000					3240	16800	17800	19100	0.70	8
2500					3870	20000	21200	22700	0.70	

Note: In the table arranges the load loses for the parenthesis refers to the temperature (to see the stipulation of GB1094.11) under value

③ 35kV the level SC(B) 10 series no-excitation dry type distribution transformer performance parameter

Rated Capacity (kVA)	Voltage Combination			Vector Group	No-load Loss (w)	Under different insulation heat-resisting rank load loss(W)			No-load Current(%)	Short Circuit Impedance(%)
	HV (KV)	HV (Tapping)	LV (KV)			130°C(B) (100°C)	155°C(F) (120°C)	180° C(H) (145°C)		
50	35 36 37 38.5	±2x1.25% ±5%	0.4	Dyn11 Yyn0	450	1340	1420	1520	2.30	6
100					630	1970	2090	2230	2.00	
160					790	2650	2810	3000	1.50	
200					880	3130	3320	3550	1.50	
250					990	3580	3800	4060	1.30	
315					1170	4250	4510	4820	1.30	
400					1370	5100	5410	5790	1.10	
500					1620	6270	6650	7110	1.10	
630					1860	7250	7690	8230	1.00	
800					2160	8600	9120	9760	1.00	
1000					2430	9860	10400	11100	0.75	
1250					2830	12000	12700	13600	0.75	
1600					3240	14600	15400	16500	0.75	
2000					3820	17200	18200	19500	0.75	
2500					4450	20600	21800	23300	0.75	

Note: In the table arranges the load loses for the parenthesis refers to the temperature (to see the stipulation of GB1094.11) under value

● THREE-PHASE OIL IMMERSED DISTRIBUTION TRANSFORMER


① 10KV Three Phase Oil-Immersed Distribution Transformer



◆ Definition

10KV oil-immersed distribution transformers are widely used in distribution network, power supply and distribution systems of industrial & mining enterprises. It has advantages of compact structure, beautiful appearance, small size, low noise and strong overload capacity.

10kv class three phase oil-immersed distribution transformer has hermetically sealed type and conservator type. The transformer is applicable to plant, mine, petrol chemical and other power distribution system of 10kv class for industry and agriculture. They are also popular in sites with oil contamination and chemical substances.

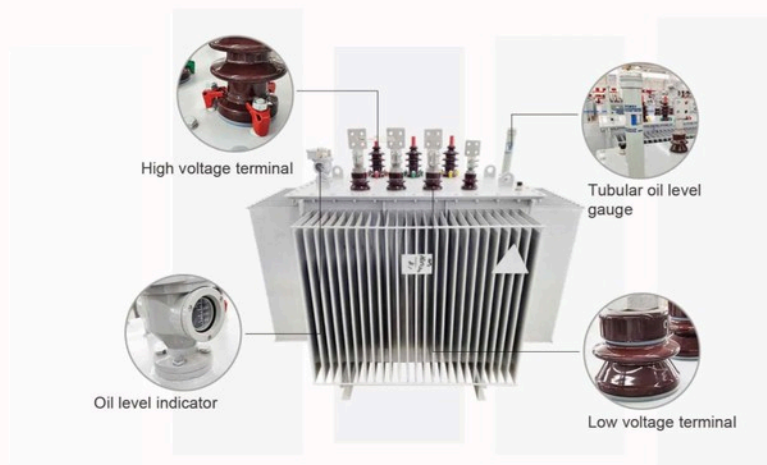

◆ Technical Data Of S13 Series 10kV Low-loss And Non-excitation Regulation Power Transformer

Rated Capacity (kVA)	Voltage Combination			Vector Group	No-load Loss (w)	Load loss (75°C) (w)	No-load Current(%)	Short Circuit Impedance(%)
	HV (KV)	HV (Tapping)	LV (KV)					
30	6 6.3 10 10.5	$\pm 2 \times 2.5\%$ $\pm 5\%$	0.4	Dyn11 Yzn11 Yyn0	80	630/600	1.5	4
50					100	910/870	1.3	
63					110	1090/1040	1.2	
80					130	1310/1250	1.2	
100					150	1580/1500	1.1	
125					170	1890/1800	1.1	
160					200	2310/2200	1.0	
200					240	2730/2600	1.0	
250					290	3200/3050	0.9	
315				Dyn11 Yyn0	340	3830/3650	0.9	4.5
400					410	4520/4300	0.8	
500					480	5410/5150	0.8	
630					570	6200	0.6	
800					700	7500	0.6	
1000					830	10300	0.6	
1250					970	12000	0.5	
1600					1170	14500	0.5	
2000					1360	18300	0.4	
2500					1600	21200	0.4	5


● THREE-PHASE OIL IMMERSED DISTRIBUTION TRANSFORMER

② 20KV Three Phase Oil-Immersed Distribution Transformer



◆ Definition

Compared with 10KV class, 20KV three phase oil-immersed distribution transformer has some advantages: Increase power supply capability, Ensure the voltage quality. Debase the electric energy loss in power system, etc. It can save the construction fee of power system. It is the developing product of energy conservation in power system.

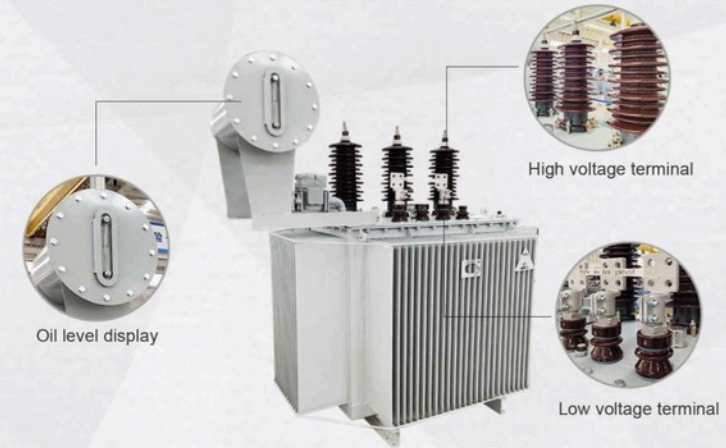


◆ Technical Data Of S11 Series 20kV Oil Immersed Power Transformer

Rated Capacity (kVA)	Voltage Combination			Vector Group	No-load Loss (w)	Load loss (75°C) (w)	No-load Current(%)	Short Circuit Impedance(%)
	HV (KV)	HV (Tapping)	LV (KV)					
30	20	±2x2.5% ±5%	0.4	Dyn11	90	660	2.1	5.5
50					130	960	2.0	
63					150	1145	1.9	
80					180	1370	1.8	
100					200	1650	1.6	
125					240	1980	1.5	
160					290	2420	1.4	
200					330	2860	1.3	
250					400	3350	1.2	
315					480	4010	1.1	
400					570	4730	1.0	6
500					680	5660	1.0	
630					810	6820	0.9	
800					980	8250	0.8	
1000					1150	11330	0.7	
1250					1350	13200	0.7	
1600					1630	15950	0.6	
2000					1950	19140	0.6	
2500					2340	22200	0.5	

● THREE-PHASE OIL IMMERSED DISTRIBUTION TRANSFORMER

③ 35KV Three Phase Oil-Immersed Distribution Transformer

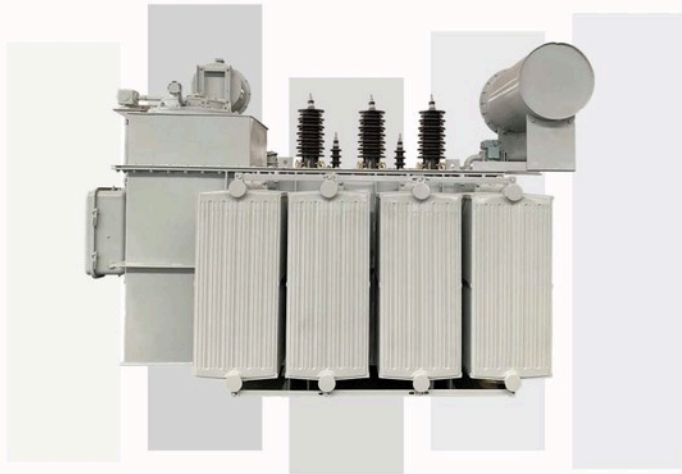

◆ Definition

35kV class three phase oil immersed distribution transformers comply with the Standard of ANSI C57.12.00.IEC60076.GB1097(Power transformer) and GB/T6451(Technical parameter and requirements for three phase oil-immersed power transformer), both no-load loss and on-load loss are much lower, good quality C.R.G.O.core type, high-quality oxygen-free copper coil, good appearance, safe operation, widely used over the country.



◆ Technical Data for 35KV Three Phase Oil-Immersed Distribution Transformer

Rated Capacity (kVA)	Voltage Combination			Vector Group	No-load Loss (w)	Load loss (75°C) (w)	No-load Current(%)	Short Circuit Impedance(%)
	HV (KV)	HV (Tapping)	LV (KV)					
630	35	±5%	3.15	Yd11	830	7870	1.10	6.5
800					980	9410	1.00	
1000					1150	11540	1.00	
1250					1410	13940	0.90	
1600					1700	16670	0.80	
2000					2180	18380	0.70	
2500					2560	19670	0.60	
3150	35~38.5	±5%	3.15		3040	23090	0.56	7.0
4000					3620	27360	0.56	
5000					4320	31380	0.48	
6300					5250	35060	0.48	
8000					7200	38480	0.42	
10000					8700	45320	0.42	
12500					10080	53870	0.40	
16000	35~38.5	±2x2.5%	3.15	Ynd11	12160	65840	0.40	8.0
20000					14400	79520	0.40	
25000					17020	94050	0.32	
31500					20220	112860	0.32	

● POWER TRANSFORMER

① 110KV Power Transformer



◆ Definition

Power transformers are designed and optimized by absorbing and utilizing advanced technologies at home and abroad to optimize the transformer core, coil, body, leads, fuel tank, and other components, which features follow low partial discharge, low loss, low noise, lightweight, and high reliability. Its excellent performance has won high praise from users and relevant experts.

This product has the characteristics of stability, economy, and environmental protection, and is suitable for power plants, substations, large industrial and mineralization enterprises, etc



◆ Technical Data Sheet

① Technical Data Of Three-phase Duplex Winding Power Transformer On-load Changer

Rated Capacity (kVA)	Voltage Combined		Vector-group	No-load Loss (kw)	Load loss (75°C) (kw)	No load Current(%)	Short Circuit Impedance(%)
	HV(KV)	LV(KV)					
6300	110±8x1.25%	6.3	YNd11	10.0	36	0.80	10.5
8000				12.0	45	0.80	
10000				14.2	53	0.74	
12500				16.8	63	0.74	
16000				20.2	77	0.69	
20000				24.0	93	0.69	
25000				28.4	110	0.64	
31500				33.8	133	0.64	
40000				40.4	156	0.58	
50000				47.8	194	0.58	
63000				56.8	234	0.52	

② Technical Data Of Three-phase Three Winding Power Transformer On-load Changer

Rated Capacity (kVA)	Voltage Combined			Vector-group	No-load Loss (kw)	Load loss (75°C) (kw)	No load Current(%)	Short Circuit Impedance(%)
	HV(KV)	MV(KV)	LV(KV)					
6300	110±8x1.25%	35	6.3	YNyn0d11	12.0	47	0.95	H-M 10.5
8000					14.4	56	0.95	
10000					17.1	66	0.89	
12500					20.2	78	0.89	
16000					24.2	95	0.84	
20000					28.6	112	0.84	H-L 17.5-18.5
25000					33.8	133	0.78	
31500					40.2	157	0.78	M-L 6.5
40000					48.2	189	0.73	
50000					56.9	225	0.73	
63000					67.7	270	0.67	

1.10 type products:no-load loss fell by 10 percent;Load loss by 5 per cent.

2.11 type products:no-load loss dropped 20%;Load loss by 5 per cent.

② 220KV Power Transformer



◆ Definition

JIEZOU POWER 220kV power transformer, use Japanese Toshiba analysis software and our company special calculation and validation procedures to the transformer core, winding, implement body, lead, fuel tanks, etc. Parts of the optimal design and carry on the omni-directional validation, ensure product performance. Superior process equipment.

Elaborate material selecting and efficient manufacturing making the transformer has small volume, light weight, low loss, low partial discharge, low noise characteristics, the product quality is superior, energy conservation and environmental protection, easy installation and maintenance, reliable operation and effectively reduced products running costs.

This product has the characteristics of stability, economy, and environmental protection, and is suitable for power plants, substations, large industrial and mineralization enterprises, etc



◆ Technical Data Sheet

① Technical Data Of Three-phase Duplex Winding Power Transformer On-load Changer

Rated Capacity (kVA)	Voltage Combined		Vector-group	No-load Loss (kw)	Load loss (75°C) (kw)	No load Current(%)	Short Circuit Impedance (%)
	HV(KV)	LV(KV)					
31500	220±8x1.25%	6.3	YNd11	38	135	0.70	12~14
40000		6.6		45	157	0.63	
50000		10.5		54	189	0.56	
63000		11		63	220	0.56	
90000		35		80	288	0.49	
120000		37		99	346	0.49	
150000		38.5		116	405	0.42	
180000		10.5		135	468	0.42	
120000		11		102	355	0.49	
150000		35		120	415	0.42	
180000		37		140	475	0.42	
180000		38.5					

② Technical Data Of Three-phase Three Winding Power Transformer On-load Changer

Rated Capacity (kVA)	Voltage Combined			Vector-group	No-load Loss (kw)	Load loss (75°C) (kw)	No load Current(%)	Capacity assignment(%)	Short Circuit Impedance (%)
	HV(KV)	MV(KV)	LV(KV)						
31500	220±8x1.25%	69	6.3	YNyn0d11	44	162	0.77	100/100/100 100/50/100 100/100/50	H-M 12-14
40000			6.6		52	189	0.70		
50000			10.5		60	225	0.63		
63000			11		70	261	0.63		H-L 22-24
90000			35		92	351	0.56		
120000			37		115	432	0.56		
150000			38.5		135	513	0.49	M-L 7-9	
180000			10.5		156	630	0.49		
240000			11		193	780	0.45		
			38.5						

② 345KV Power Transformer



◆ Definition

JIEZOU POWER 345kV power transformer, use Japanese Toshiba analysis software and our company special calculation and validation procedures to the transformer core, winding, implement body, lead, fuel tanks, etc. Parts of the optimal design and carry on the omni-directional validation, ensure product performance. Superior process equipment.

Elaborate material selecting and efficient manufacturing making the transformer has small volume, light weight, low loss, low partial discharge, low noise characteristics, the product quality is superior, energy conservation and environmental protection, easy installation and maintenance, reliable operation and effectively reduced products running costs.

This product has the characteristics of stability, economy, and environmental protection, and is suitable for power plants, substations, large industrial and mineralization enterprises, etc



◆ Technical Data Sheet

345kV two-winding power transformer

Model	Rated capacity (kVA)	Rated voltage and tapping range		Vector group	No load current %	No load losses kW	On load losses kW	Impedance voltage (%)
		HV	LV					
SFP11-150000/330	150000	$363 \pm 2 \times 2.5\%$	10.5~20	Ynd11	0.3	90	400	14-15
SFP11-400000/330	400000	$363 \pm 2 \times 2.5\%$	10.5~20	Ynd11	0.15	185	820	14-15

345kV three-winding power transformer

Model	Rated capacity (kVA)	Rated voltage and tapping range			Vector group	No load current %	No load losses kW	On load losses kW	Impedance voltage (%)		
		HV	MV	LV					HV-MV	HV-LV	MV-LV
SFPSZ11-150000/330	150000	$330 \pm 8 \times 1.25\%$	110~121	10.5~35	YNyn0d11	0.3	95	440	14~15	24~26	7~9
SFPSZ11-240000/330	240000	$330 \pm 8 \times 1.25\%$	110~121	10.5~35	YNyn0d11	0.25	135	625	14~15	24~26	7~9
SFPSZ11-360000/330	360000	$330 \pm 8 \times 1.25\%$	110~121	10.5~35	YNyn0d11	0.15	185	850	14~15	24~26	7~9
OSFPSZ11-150000/330	150000	$330 \pm 8 \times 1.25\%$	110~121	10.5~35	YNao0d11	0.3	50	335	11~12	34~36	22~24
OSFPSZ11-240000/330	240000	$330 \pm 8 \times 1.25\%$	110~121	10.5~35	YNao0d11	0.25	70	480	11~12	34~36	22~24
OSFPSZ11-360000/330	360000	$330 \pm 8 \times 1.25\%$	110~121	10.5~35	YNao0d11	0.15	95	645	11~12	34~36	22~24




② 750KV Power Transformer




◆ Definition

750 kV Power Transformer

Designed for ultra-high-voltage transmission networks, this 750 kV power transformer delivers exceptional efficiency, reliability, and long-term operational stability. Engineered with advanced insulation technology, a low-loss magnetic core, and an optimized cooling system, it ensures efficient power transfer under the most demanding grid conditions. Its robust construction and comprehensive monitoring features provide outstanding thermal performance, high short-circuit withstand capability, and dependable operation, making it an ideal solution for large-scale substations and critical power infrastructure.

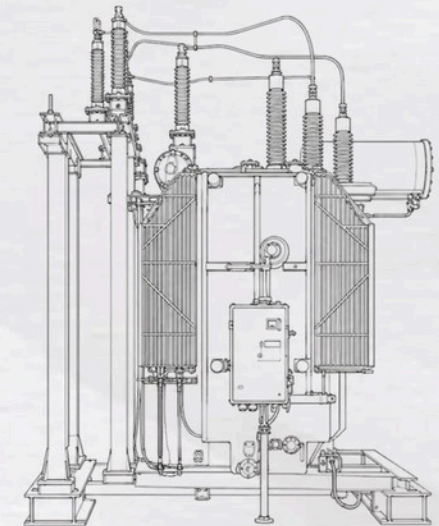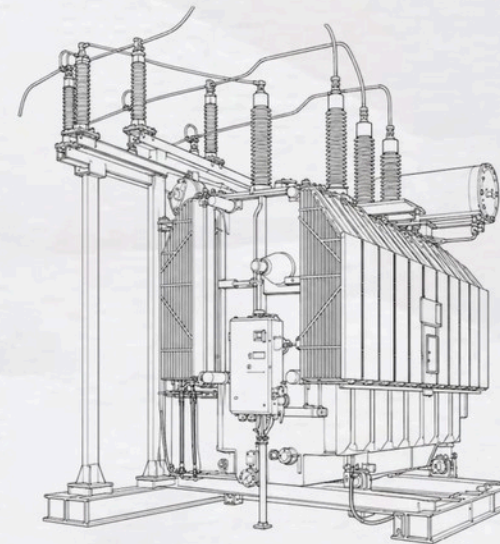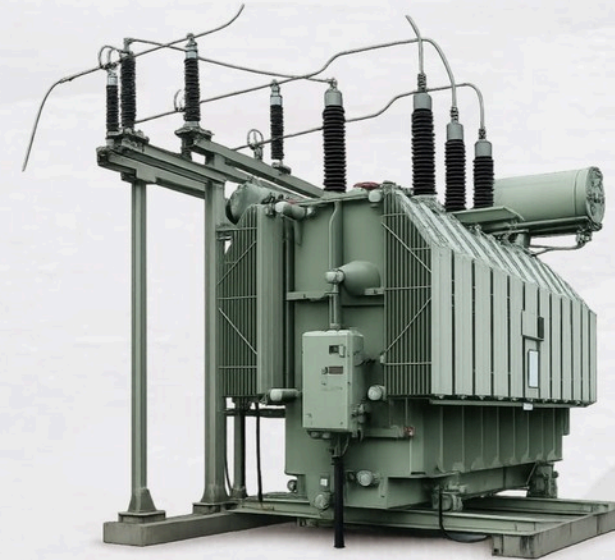

② 1000KV 1000MVA Power Transformer

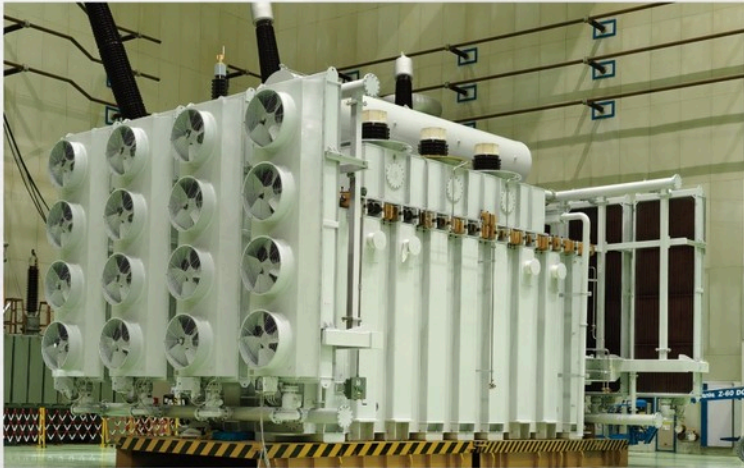

◆ Definition

1000 kV 1000MVA Ultra-High Voltage Power Transformer

Engineered for ultra-high voltage transmission, this 1000 kV 1000MVA power transformer is designed to deliver exceptional efficiency, reliability, and long-term operational stability in large-scale power grids. Featuring advanced insulation technology, optimized magnetic circuit design, and an efficient cooling system, it ensures low losses, high overload capability, and outstanding performance under demanding operating conditions. Built to meet the stringent requirements of modern UHV transmission networks, it provides secure and efficient power transfer while supporting the development of resilient, high-capacity electrical infrastructure.



COMPACT SUBSTATION




Definition

A COMPACT TRANSFORMER SUBSTATION can be explained as a group of electrical equipment that is assembled on a trailer or platform. To ensure that a compact substation is capable of fully energizing upon its delivery to the required site, it is integrated and thoroughly tested in a factory environment.

Compact transformer substation layout

The box body is composed of two modes, namely, an eye-shaped arrangement and a pin-shaped arrangement.

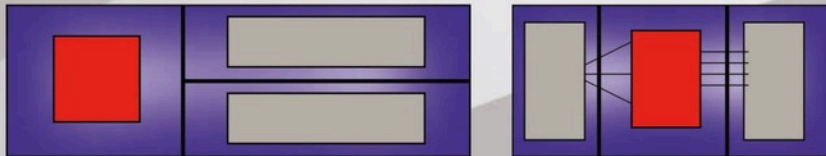

Structure



Technical Data Of YB Pre-installed Substation

	Ltem	Unit	Date
HV	Rated Frequency	Hz	50
	Rated Voltage	kV	6 10 35
	Max Working Voltage	kV	6.9 11.5 40.5
	Industrial Requency Voltage-resisting Time / isolationBallisticVoltage-resisting	kV	32/36 42/48 95/118
	Thunderand Lighting Ballistic Voltage-resistingTime / isolation SectionalPort	kV	60/70 75/85 185/215
	Rated Current	A	400 630
	Rated Brief-period Current-resisting	kA	12.5(2s) 16(2s) 20(2s)
LV	Rated Crest Value Current-resisting	kA	32.5 40 50
	Rated Voltage	V	380 220
	Rated Current Of Major Return Circuit	A	100-3200
	Rated short-circuit Current-resisting	kA	15 30 50
	Rated Crest Value Current-resisting	kA	30 63 110
	Branch Circuit	A	10-800
	Quantity Of Branch	line	1-12
Transtorming	Compensation Circuit	kVAR	0-360
	Rated Capacity	kVA	50-2000
	Short-circuit Impedance	%	4 6
	Scope Of Branch Connection		±2x2.5% ±5%
	Vector Group		Yyn0 Dyn11

Our service goal:

Product quality without complaints,
customer service with profession.


Service standard:

Warm, thoughtful, timely and effective.

Quality system certification:

Pass ISO9001 quality system certification, ISO45001 Quality System, Environment System and OHSAS 18000 Occupation Health Safety Management System implement intellectual property management system Center "quality" as first working principle.



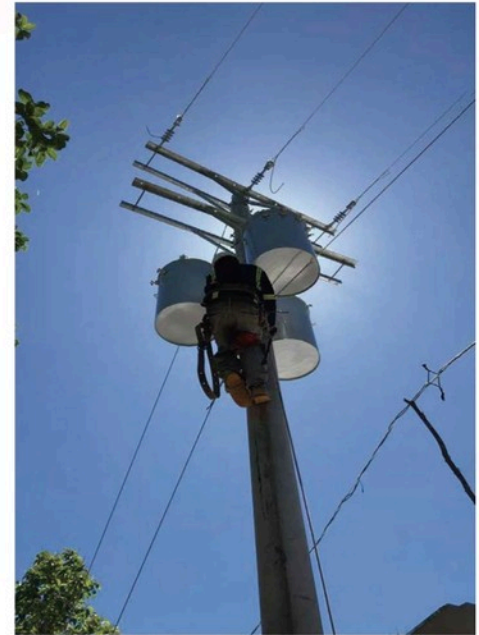



BUILD WITH MIND SERVE WITH HEART.2026



JIEZOU POWER DUBAI

Address:

Plot no. S60810 , Street no S1500, Jafza South Jebel Ali Free Zone Dubai United Ar

Email:

shentong@jiezougroupp.com



JIEZOU POWER CHINA

Address:

1101,1108 Room Building A No.99 Youxiang Road Wuzhong District Suzhou,Jiangsu,China

Email:

shentong@jiezougroupp.com



JIEZOU POWER USA

Address:

1243 N Roseburg Ct, Visalia, CA 93291

Email:

info@jiezougroupp.com



JIEZOU POWER CANADA

Address:

3348 Harvester Road, Unit #2 Burlington, ON L7N 3M8

Email:

info@jiezougroupp.com



JIEZOU POWER PHILIPPINES

Address:

Fernandez Ext., Bgy. Tanglaw, Puerto Princesa, Philippines

Email:

shentong@jiezougroupp.com



JIEZOU POWER DOMINICAN REPUBLIC

Address:

Gustavo Mejia Ricart #11 Edif, Rogama, local 1Ey 3ENaco. Santo Domingo, República Dominicana

Email:

info@jiezougroupp.com