



GLOBAL POWER ENERGY SYSTEM SOLUTION SUPPLIER




JIEZOU POWER

www.jiezoupower.com



GLOBAL FOOTPRINT

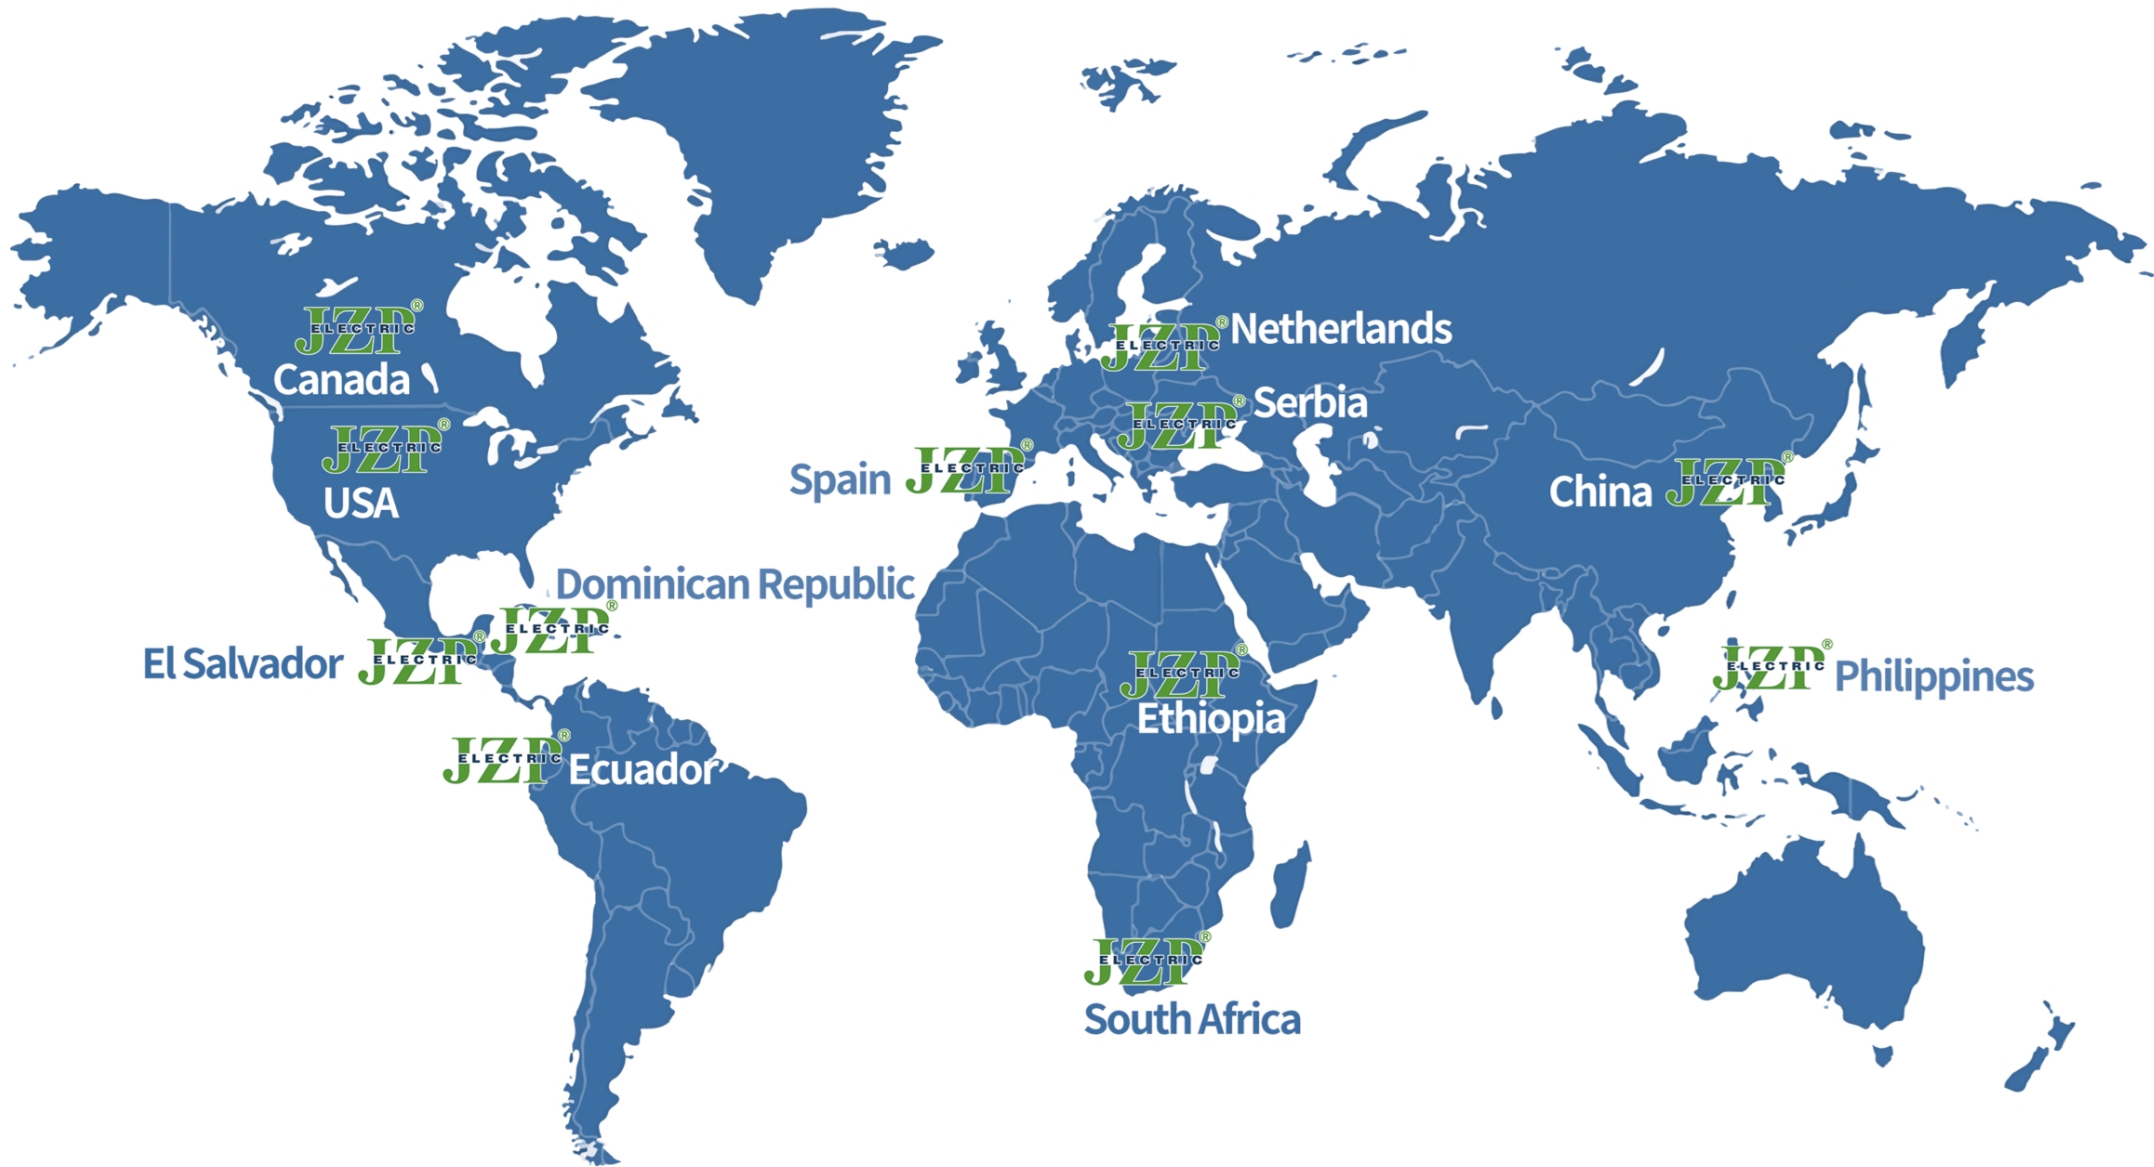

REFERENCE LIST





RELIABLE

EFFICIENT

PROFESSIONAL



COMPANY PROFILE

JIEZOU POWER, a professional designer, manufacturer and installer of power system solution around the World, was founded in 2021 year, occupies 200,000 square meters.

JIEZOU POWER, mainly manages power grid projects, 1000KV EPC, 1000KV hydroelectric power plant, 1000KV power substation, etc.

JIEZOU POWER factory can manufacture oil type and dry type distribution transformer, max 1000KV 1000MVA power transformer, GIS, switchgear, substation, based on ANSI/IEEE/DOE2016/CSA/IEC60076 standard.

JIEZOU POWER successively obtain ISO9001, ISO14001, ISO45001, UL, CUL, CSA certificate; SGS, TUV, INTERTEK, TYPE TEST REPORT.

Until 2023 year, worldwide branch companies and factories are distributed in United States, Canada, Dubai, Dominican Republic, Philippines, Serbia, USA, El Salvador, Ecuador, South Africa, Netherlands, Chinese branch factories and companies are in TaiZhou city, Headquarters in Suzhou city

Looking into the future, JIEZOU POWER's vision is to be the most trusted power system solution provider, solve the World's most urgent power management challenges, accelerate the planet's transition to renewable energy. So that everyone can have a more low-carbon and bright life. To this end, we will do our utmost to make efforts.

VISION

To be the most trusted power system solution provider

AIM

Product quality without complaints,
Customer service with profession

MISSION

Accelerate the planet's transition to renewable energy,
Create a low-carbon energy life for everyone

No.1

The biggest manufacturer and exporter of IEEE/ANSI/DOE2016/IEC standard transformers and electric equipment in China.

24H

24-hour response, providing solution less than 24 hours.

100+

More than 100 patents in fields of transformer and electric equipment technology, material, design, research& development.

100,000+







More than 100,000 units of transformers and electric equipment have been sold Worldwide.

200,000+

More than 200000 square meters production site.

20,000,000+

More than 20,000,000 dollars annual investment in technology research and development.

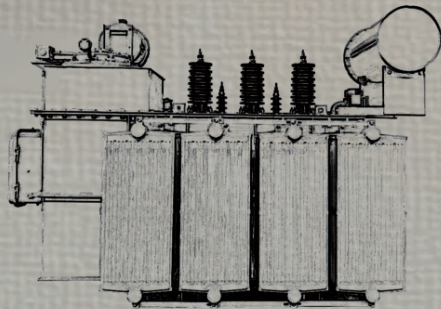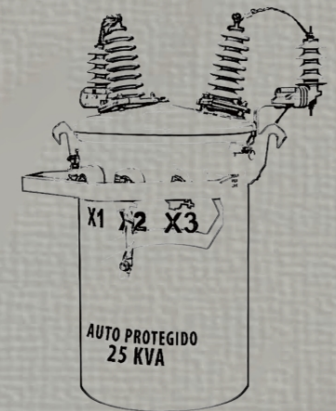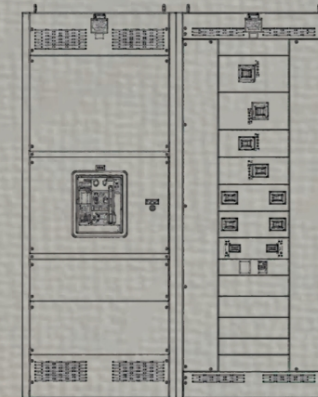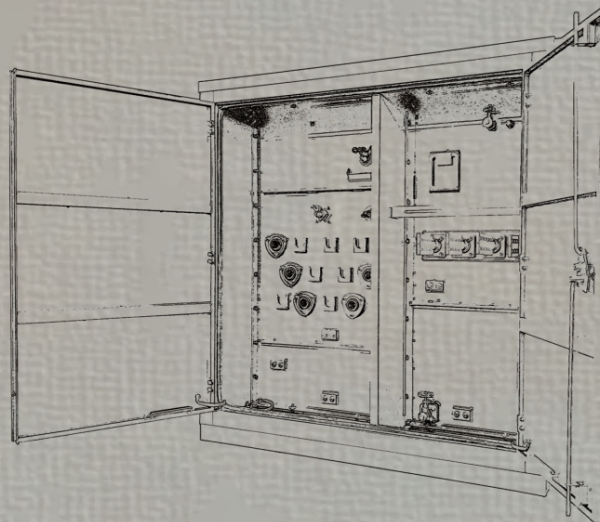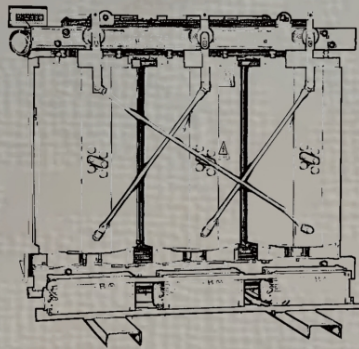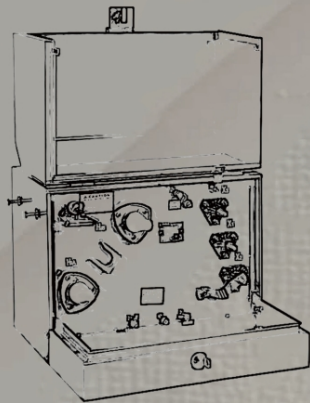

patience

humble

enthusiasm


RELIABLE

ENTHUSIASM

reliable

HUMBLE

professional

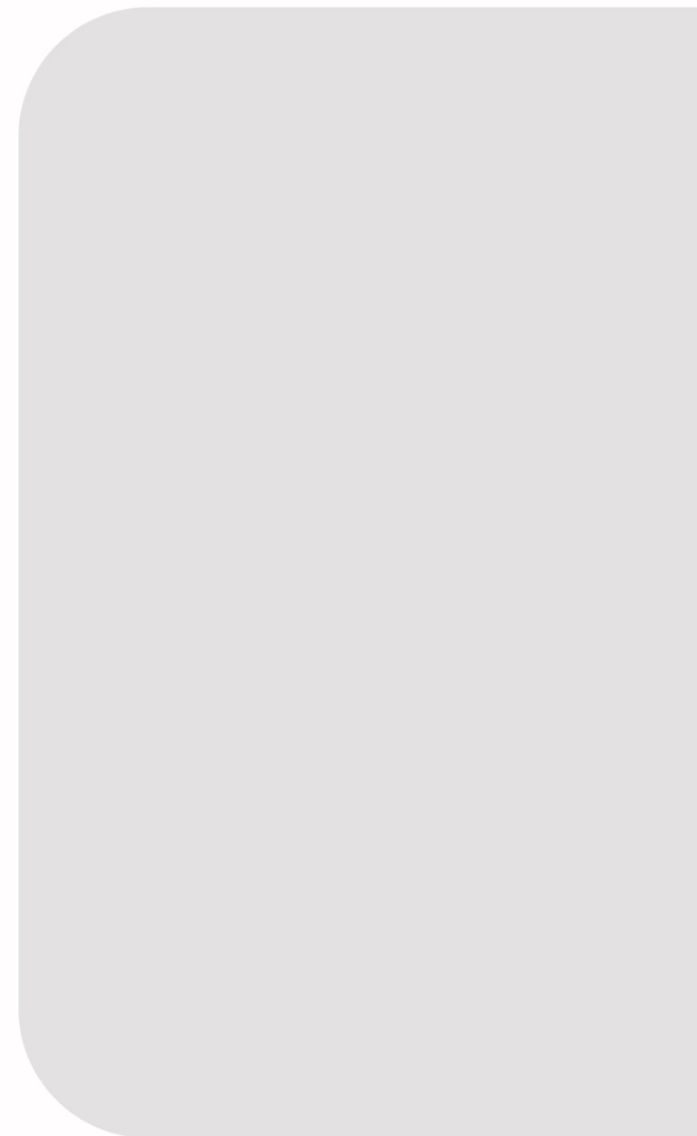

Safe

We have more advanced design concepts and production processes, and strict quality control procedures. Also have complete and effective quality control system and test system, strictly based on IEC , IEEE , ANSI, DOE,ISO, UL,cUL, CE,CSA standard, etc.



Reliable

Provide insured & Reliable equipments and services have benefited us and our customers for the past 10 years or more. JIEZOU POWER attach great importance to the after-sales service system. In light of this point, we have established branches in the United States, Canada, Dubai, Dominican Republic, Philippines and other countries to ensure the well operation of equipment during the warranty period.



High-efficiency

24-hour response.
Providing solution less than 24 hours.



Customized and Dedicated

We can customize the products according to customer's requirements, such as the capacity, the high and low voltage, the appearance and color, the requirements of different brands, the accessories of the products and so on. According to different electric requirement, the equipment was produced according to various international standards: ANSI, IEC, IEEE, CSA etc. Coordination of factory and third party laboratories guarantee the accomplishment of varieties of standards and quality.



Professional

More than 100 engineers, to provide technical service with the most advanced technological levels. JIEZOU POWER has been engaged in HV electric field and served clients from various countries since 2021. Over 30 years of international experience on electric power fields including power substation, distribution system, transmission lines makes us confident of participating and completing electric project.



Resources Integration

JIEZOU POWER provides mature supply management for clients, we integrated beneficial resources from production, transportation, shipping, delivery, which will guarantee the process operation and also achieve good cost control.



KYN28A-12(GZS1)

Armouring removable AC metal enclosed switchgear




Summarize

KYN28A-12(Z) Armoured removable AC metal enclosed switchgear (also known as GZS1 switchgear) is an advanced medium voltage switchgear developed and provided by West On Source for technology transfer. It is suitable for three-phase AC 50Hz power system, which is used to receive and distribute electric energy and control, protect and monitor the circuit.

Compliance standards :GB3906-91 "3~35kV AC metal closed switchgear", GB11022-89 "High voltage switchgear general technical conditions" IEC298(1990) "rated voltage above 1kV 50kV and below AC metal enclosed switchgear and Control equipment ", D1404-91 "Indoor AC high voltage switchgear ordering technical conditions".

Model and meaning

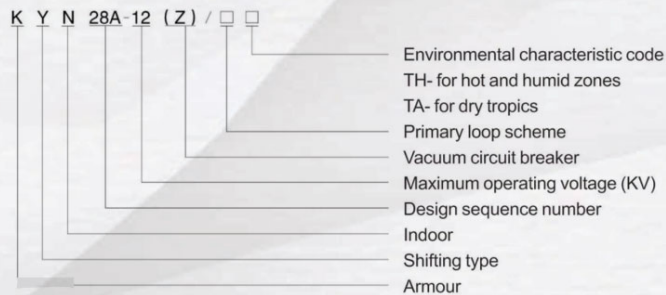

Environmental conditions of use

- ◇ Ambient temperature The maximum temperature is not higher than +40° C, the minimum temperature is not lower than -10° C;
- ◇ The average daily relative humidity is ≤ 95%, and the average monthly relative humidity is ≤90%.
- ◇ The altitude does not exceed 1000m;
- ◇ The intensity of the earthquake does not exceed 8;
- ◇ The surrounding air should be free from corrosive or flammable gas, water vapor and other obvious pollution;
- ◇ There is no place of frequent violent vibration;
- ◇ When used under more than normal environmental conditions, the user and our company shall negotiate.

Technical parameter

Item		Unit	Numerical value		
Rated voltage		kV	3.6、7.2、12		
Maximum operating voltage		kV	3.6、7.2、12		
Rated frequency		Hz	50-60		
Circuit breaker rated current		A	630、1250、1600、2000、3150、4000		
Rated current of switchgear		A	630、1250、1600、2000、3150、4000		
Rated thermal stable current (4s)		kA	16、20、25、31.5、40、50		
Rated dynamic stable current (peak)		kA	40、50、63、80、100、125		
Rated short-circuit breaking current		kA	16、20、25、31.5、40、50		
Rated short circuit closing current (peak)		kA	40、50、63、80、100、125		
Rated insulation level	Lmin power frequency withstand voltage	kV	24	32	42
	Lightning impulse withstand voltage	kV	40	60	75
Class of protection		The housing is IP4X, and the compartment and circuit breaker are IP2X when opened			

Order instructions

GXS1 switch cabinet should provide the following technical information when ordering:

- ◇ Main wiring scheme diagram number, use and single-wire system diagram, rated voltage, rated current, rated short-circuit breaking current, distribution room layout and switchgear arrangement diagram, etc.
- ◇ Requirements for control, measurement and protection functions of switchgear and for other locking and automatic devices;
- ◇ The type, specification and quantity of the main electrical components in the switchgear;
- ◇ If a bridge connection is required between the switchgear or the incoming cable cabinet, the span of the bus bridge, the height from the ground, the rated carrying capacity and other specific requirements should be provided;
- ◇ When the switch cabinet is used in special environmental conditions, it should be explained in detail when ordering.
- ◇ Other special requirements.

KYN10-40.5

Armouring removable AC metal enclosed switchgear




Summarize

KYN10-40.5 series AC metal closed switchgear (high voltage handcar cabinet), is a new generation of switchgear designed and developed by itself according to domestic characteristics, digestion and absorption of advanced technology at home and abroad, with small size, large breaking short circuit current, easy installation, short maintenance cycle, easy operation and maintenance, and completely reliable use.

KYN10-40.5 type AC metal enclosed switchgear is a three-phase AC 50Hz indoor metal armoured handcar cabinet, suitable for power plants, substations and other systems with rated voltage of 40.5kV single bus and single bus segment power system, for control, acceptance and distribution of electric energy.

Compliance with standards: its technology can reach GB3906 "3~35KV AC metal closed switchgear" standard and IEC298 "rated voltage above 1kV 52kV and below AC metal switchgear and control equipment".

Model and meaning

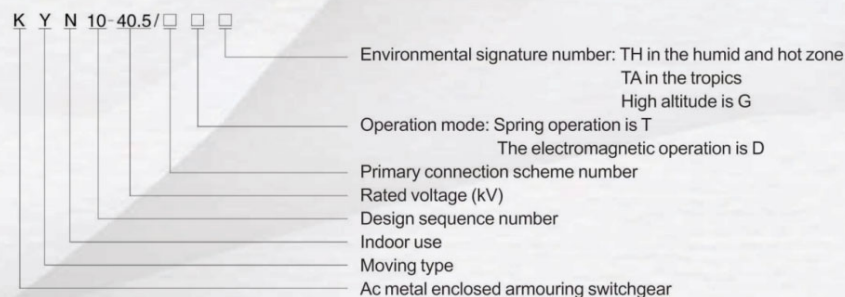

Environmental conditions of use

- ◇ The ambient air temperature is not higher than +40° C, and the minimum is not lower than -15° C;
- ◇ The daily average relative humidity is not more than 95%(+25° C), the monthly average is not more than 90%(+25° C);
- ◇ The altitude does not exceed 1000m;
- ◇ No frequent severe vibration, seismic intensity does not exceed 8 degrees;
- ◇ The surrounding air is not significantly polluted by corrosive or flammable gases, water vapor, etc.
- ◇ If the conditions of use of the product exceed the above provisions, the user and the manufacturer shall negotiate to determine.

Technical parameter

◇ Technical parameters of KYN10-40.5 type car cabinet

Serial number	Item	Unit	Numerical value
1	Rated voltage	kV	40.5
2	Rated current	A	1250, 1600
3	Rated short-circuit breaking current	kA	25, 31.5
4	Rated short circuit closing current (peak)	kA	63, 80
5	Rated short-time withstand current 4s	kA	25, 31.5
6	Rated peak withstand current	kA	63, 80
7	Matching circuit breaker	kA	ZN23-40.5 vacuum circuit breaker LN2-40.5 sulfur hexafluoride circuit breaker ZN12 integrated vacuum circuit breaker
8	Equipped with an operating mechanism		CT19, CD10
9	Overall dimensions (W x D x H)	mm	1400x2200x2625
10	Class of protection	kg	IP2X

Order instructions

- ◇ When ordering, the user shall provide the primary main wiring scheme number, main wiring system diagram, arrangement diagram, secondary circuit schematic diagram and terminal arrangement diagram;
- ◇ The model, specification and quantity of the primary and secondary components in the cabinet;
- ◇ The color of the shell, if the user has no special requirements, according to the manufacturer's regulations;
- ◇ Users need zinc oxide arrester to absorb overvoltage, please put forward when ordering;
- ◇ If the cabinet is used under special environmental conditions, it should be put forward when ordering.
- ◇ If the user has other requirements, can be discussed in person at the time of ordering.

KYN 61-40.5

Aarmouring removable AC metal enclosed switchgear




Summarize

KYN61-40.5 armoured movable metal closed switchgear (hereinafter referred to as switchgear) is a complete set of 40.5kV three-phase AC 50Hz power distribution equipment mainly used in power plants, substations and industrial and mining enterprises to accept and distribute electrical energy, which can realize the control, protection and monitoring of the circuit; In addition to being widely used in general power systems, it can also be used in places with frequent operations.

Compliance standards: GB3906-91 "3-35kV AC metal enclosed switchgear", IEC298 "rated voltage above 1kV, 52kV AC metal enclosed switchgear and control equipment".

Model and meaning

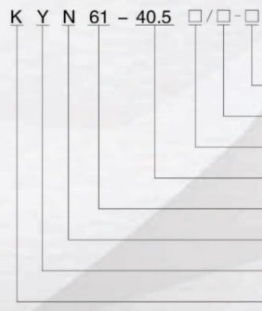

- Rated short-circuit breaking current
- Rated current
- Type of circuit breaker
- Rated voltage
- Design sequence number
- Conditions of use: indoor
- Structure feature: movable type
- Product name (Metal armor type)

Environmental conditions of use

- ◇ The maximum ambient temperature is not higher than +40° C, the minimum is not lower than -10° C;
- ◇ The daily average of relative air humidity is not more than 95%, the monthly average is not more than 90%;
- ◇ The altitude does not exceed 1000m;
- ◇ The intensity of the earthquake does not exceed 8 degrees;
- ◇ Not suitable for corrosion or flammable gas, water vapor and other obvious pollution places.
- ◇ Note: When the above normal conditions of use are exceeded, the user can negotiate with the manufacturer to determine.

Technical parameter

Serial number	Item	Unit	Numerical value	
1	Rated voltage	kV	40.5	
2	Rated insulation level	kV	Lightning impulse withstand voltage	185
			Power frequency withstand voltage (Imin)	95
3	Rated frequency	Hz	50	
4	Rated current	A	1250	1600
5	Rated short-circuit breaking current	kA	25、31.5	
6	Lemon-ink short circuit closing current (peak)	kA	63、80	
7	Rated dynamic stable current (peak)	kA	63、80	
8	4S Thermal stable current (RMS)	kA	25,31.5	
9	Case protection class		IP3X	
10	Overall dimensions (W x D x H)	Vacuum breaker cabinet	mm	1400x2800x2600
11	Weight (breaker cabinet)		KG	2600
	Which hand car heavy			300
		Middle hand car		400

Order instructions

- ◇ Main wiring scheme number, single-wire system diagram and arrangement diagram;
- ◇ Secondary circuit wiring diagram, terminal arrangement diagram;
- ◇ The model, specification and quantity of the electrical components in the switchgear;
- ◇ When the switch cabinet is used in special environmental conditions, it should be put forward when ordering;
- ◇ When accessories and spare parts are needed, the type and quantity should be proposed.

HXGN15-12ZF(R)

Box type fixed AC metal closed ring switchgear




Summarize

HXGN15-12ZF® box-type (fixed) metal closed ring switchgear (referred to as ring switchgear) is a new type of high voltage switchgear produced for urban power grid transformation and construction needs. In the power supply system, it is also used to break the load current and short circuit current and close the short circuit current. This ring network cabinet is equipped with a vacuum load switch. The operating mechanism is a spring operated mechanism, which can be operated manually or electrically. The grounding switch and isolating knife are equipped with manual operation mechanism, and the ring network cabinet has strong complete set, small size, no burning and explosion danger, and has reliable "five prevention" function.

Ring network cabinet is suitable for AC 12kV, 50~60Hz distribution system, widely used in urban power grid construction and transformation projects, industrial and mining enterprises, speech floor buildings and public facilities, as a ring network power supply unit and terminal equipment, plays the role of power distribution, control and protection of electrical equipment, can also be installed in box-type substation.

Comply with the standards :IEC420 "High voltage AC load switch fuse combination electrical appliances", GB3906-91 "3-35kV AC metal closed switchgear" relevant provisions.

Model and meaning

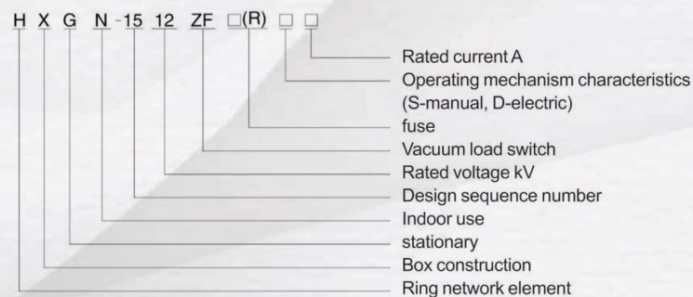

Environmental conditions of use

- ◇ The maximum ambient temperature is not higher than +40° C, the minimum is not lower than -25° C;
- ◇ The daily average relative humidity is not more than 95%, the monthly average is not more than 90%;
- ◇ The altitude does not exceed 1000m;
- ◇ Free of conductive dust, corrosive gases and water vapor;
- ◇ Places free from fire and explosion hazards;
- ◇ There is no frequent severe vibration.

Technical parameter

Serial number	Item	Unit	Numerical value
1	Rated current	kV	12
2	Rated voltage	A	Load switch 630
			Combination apparatus 125
3	Rated short-circuit closing current	kV	50
4	Rated short-circuit breaking current	kV	20
5	Rated active load breaking current	A	630
6	4S heat stable current	kV	20
7	Rated stable current (peak)	kV	50
8	Power frequency withstand voltage	kV	42(Fracture, 48)
9	Lightning impulse withstand voltage	kV	75(Fracture, 48)
10	Mechanical life	Time	10000
11	Rated crossover current	A	3150
12	Mode of operation		Manual or electric
13	Class of protection		IP2X

Order instructions

When ordering:

- ◇ Primary line plan, numbering or primary system drawing;
- ◇ Secondary electrical schematics and control loop voltage;
- ◇ High voltage switchgear layout;
- ◇ If you need non-standard primary and secondary line schemes, you can entrust the company to design and produce.

XGN66-12

Box type fixed AC metal enclosed switchgear




Summarize

XGN66-12 box type (indoor) AC metal closed switchgear (hereinafter referred to as the switchgear) is a new generation of high-voltage electrical equipment designed and developed by our factory, the switchgear is suitable for 3, 6-12kV three-phase AC. The indoor complete set of 50Hz single bus section is used for accepting and distributing electric energy, and has the functions of controlling, protecting and monitoring the circuit, which can be applied in various types of power plants, substations, industrial and mining enterprises, high-rise buildings and other places, and can be combined with the ring network cabinet for opening and closing offices.

The product absorbs foreign advanced technology, aiming at the problems of high accident rate and large volume of the existing similar switchgear in our country. It has a small size, only 50% of the volume of the ordinary switch cabinet, the circuit breaker has high reliability, good performance, and the "five prevention" interlock mechanism is reliable and simple.

Meet the standards: GB3906 "3-35kV AC metal closed switchgear" and Ministry of Power DL404 "Indoor AC high voltage switchgear loan technical conditions" requirements, but also meet the international standard IEC298 "1kV or more Under 52kV AC metal enclosed switchgear and control equipment" requirements, and has two proposed "five-guard" blocking function.

Model and meaning

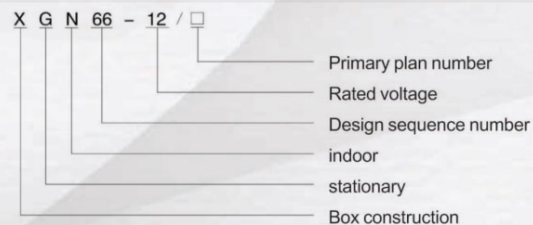

Environmental conditions of use

- ◇ The maximum ambient temperature is not higher than +40° C, the minimum is not lower than -10° C;
- ◇ The daily average relative temperature is not more than 95%, the monthly average is not more than 99%;
- ◇ The altitude does not exceed 1000m;
- ◇ There is no fire, explosion danger, serious pollution, chemical corrosion and violent vibration.

Technical parameter

Serial number	Item	Unit	Numerical value	
1	Rated voltage (i.e. maximum operating voltage)	kV	12	
2	Rated insulation level	1min power frequency withstand voltage	kV	42
		Lightning impulse withstand voltage	kV	75
3	Rated frequency	Hz	50	
4	Rated current of main bus	A	630	1000
5	Rated current of the branch bus	A	630	1000
6	4s heat stable current	kA	20	31.5
7	Rated dynamic stable current	kA	50	80
8	Class of protection		IP2X	
9	Dimensions (W x D x H)	mm	900x950x2300	900x950x2300

Order instructions

The user must provide the following information when ordering:

- ◇ Main wiring scheme number and single-wire system diagram, arrangement diagram;
- ◇ Secondary circuit wiring diagram, terminal arrangement diagram;
- ◇ Type, specification and quantity of electrical components in the switch cabinet;
- ◇ The material and specifications of the main bus and bus, if the user has no requirements, shall be supplied according to the manufacturer's regulations;
- ◇ When the switch cabinet is used in special environmental conditions, it is proposed at the time of ordering;
- ◇ When accessories and spare parts are needed, the type and quantity should be provided.

MNS Low pressure draw-out switchgear



Summarize

MINS low-voltage drawout switchgear is a new generation of complete sets of products jointly developed by our company and ABB company. The product is assembled by standard modules, and its structure includes fixing technology and drawer technology.

The selection of materials is divided into steel plate structure and plastic structure, and the products reach the contemporary international level. MNS system can meet the needs of various power supply and distribution, can be widely used in land, power station, nuclear power station, Marine, oil platform and other industrial and mining enterprise distribution system.

Meet the standard :IEC529.DIN40050S standard, IP30 for solid protection greater than 42.5mm, IP40 for solid protection greater than 41.0mm, IP54 for dust and spray protection in any direction (order IP54 protection should sometimes be negotiated with the manufacturer) technical standards in line with EC439-1 "Low-voltage switchgear and control equipment", GB7251.12-2013 "low-voltage switchgear", ZBK36001 professional standards.

Model and meaning

- ◇ The maximum ambient air temperature is not higher than +40℃, the minimum is not lower than -5℃, and the average temperature within 24 hours is not higher than +35℃. If the capacity exceeds the capacity, reduce the operation according to the actual situation.
- ◇ The relative humidity of the surrounding air does not exceed 50% when the maximum temperature is +40℃, and allows a larger relative humidity at a lower temperature;
- ◇ The altitude does not exceed 2000m;
- ◇ The incline between the installation and the vertical plane of the switchgear shall not exceed 5°.

Technical parameter

Item	Numerical value
Rated insulation voltage	660V
Rated operating voltage	380V,660V
Maximum working current of main bus	4000A
Main bus short time (1S) withstand current (RMS)	80kA
Main bus short time (Max)	176kA
Maximum operating current of the distribution bus (vertical bus)	2000A
Distribution bus (vertical bus) Short-term peak current (maximum)	125kA

Order instructions

The user should provide the following information when ordering:

- ◇ Primary loop scheme and single-line system diagram;
- ◇ Secondary circuit schematic or wiring diagram;
- ◇ Layout of the device and layout of the power distribution room;
- ◇ Detailed specifications and quantities of the various electrical equipment contained in each unit;
- ◇ Provide the working current and short circuit current of the horizontal bus, and select the bus specifications according to the factory standard (the factory standard bus specifications are 10x30x2, 10x60x2, 10x80x2, 10x60x4, 10x80x2x2, 10x60x4x2), if the bus specifications are not indicated, it will be selected by the manufacturer;
- ◇ Bus system L1, L2, L3, N, PE or L1.L2, L3, PEN, if not indicated by the manufacturer selected;
- ◇ Provide the use name of each loop (limited to 10 words), if not provided, the manufacturer only provides a blank symbol plate;
- ◇ The protection level of the device shell (IP30, IP40) is to be closed at the bottom of the cabinet, if not indicated, it is IP30, the bottom of the cabinet is not closed;
- ◇ The color of the paint film on the surface of the device, if not indicated, is camel gray;
- ◇ The functional unit and installation diagram of the movable MCC;
- ◇ The material of the cabinet, if not indicated, shall be selected by the manufacturer;
- ◇ Other special requirements inconsistent with the normal use of the product.

GGD Low-voltage switchboard




Summarize

GGD type AC low-voltage distribution cabinet is suitable for power plants, substations, factories and mining enterprises and other power users of AC 50Hz, rated working voltage 380V, rated working current up to 3150A, power distribution system, as power, lighting and distribution equipment for energy conversion, distribution and control.

GGD AC low-voltage power distribution cabinet is a new type of low-voltage power distribution cabinet designed according to the requirements of the Ministry of Energy's supervisor, the majority of power users and the design department, based on the principles of safety, economy, reasonable and reliable. The product has the characteristics of high breaking ability, good dynamic and thermal stability, flexible electrical scheme, convenient combination, strong series practicability, novel structure and high protection level.

Compliance with standards: IEC439 "Low-voltage switchgear and control equipment", GB7251.1-1997 "low-voltage switchgear" and other standards.

Model and meaning

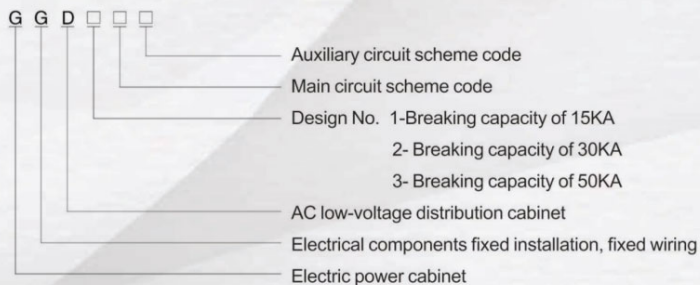

Environmental conditions of use

- ◇ The ambient air temperature is not higher than +40℃, and the minimum is not lower than -5℃. The average temperature within 24 hours shall not be higher than +35℃;
- ◇ The relative humidity of the surrounding air does not exceed 50% when the maximum is +40 ° C, and a larger relative humidity is allowed at lower temperatures. (e.g. 90% at +20 ° C) The effect of condensation that may occasionally occur due to changes in temperature should be taken into account;
- ◇ Indoor installation and use, the altitude of the use place does not exceed 2000m;
- ◇ When the equipment is installed, the vertical inclination shall not exceed 5°;
- ◇ The equipment is installed in a place without violent vibration and impact, and in a place where insufficient electrical components are corroded;
- ◇ Users have special requirements can be negotiated with the manufacturer to solve.

Technical parameter

Model number	Rated voltage (V)	Rated current (A)		Rated short circuit breaking current (KA)	Rated short circuit breaking current (KA)	Rated peak withstand current (KA)
GGD1	380	A	1000			
		B	600(630)	15	15	
		C	400			
GGD2	380	A	1500(1600)			
		B	1000	30	30	63
		C	600			
GGD3	380	A	3150			
		B	2500	50	50	105
		C	2000			

Order instructions

The user shall provide the following information when ordering:

- ◇ The full model number of the product (including the main circuit scheme and auxiliary circuit scheme number);
- ◇ Main circuit system combination sequence diagram;
- ◇ Electrical schematic diagram of auxiliary circuit;
- ◇ Cabinet component list;
- ◇ Other special requirements inconsistent with the normal conditions of use of the product.

PK Series microcomputer protection measurement and control screen



Summarize

PK series microcomputer protection and control screen is applied to transformer (distribution) power stations with voltage levels of 35kV and below, providing intelligent and networked measurement, protection and control functions for each high-voltage equipment in the station, and real-time communication with the superior main station to achieve comprehensive automation of transformer (distribution) power stations. The main functions of this series of products include: various protection and measurement control of the line; Differential protection, backup protection and measurement control of transformer; Various protection and measurement control of capacitors and motors; Measurement and control functions such as bus section and input backup.

P K - 1 / 10

closed

Open-type

Installation mode

Screen

Technical parameter

- ◇ The ambient air temperature is not higher than +40° C and the minimum is not lower than -5° C. The average temperature within 24 hours shall not be higher than +35° C;
- ◇ The relative humidity of the surrounding air does not exceed 50% when the maximum is +40° C, and a larger relative humidity is allowed at lower temperatures. (e.g. +20° C(90%)) should take into account the effect of condensation that may occasionally occur due to temperature changes; Layout of the device and layout of the power distribution room;
- ◇ Indoor installation and use, the altitude of the use place does not exceed 2000m;
- ◇ When the equipment is installed, the vertical inclination shall not exceed 5°;
- ◇ The equipment is installed in a place without violent vibration and impact, and in a place where insufficient electrical components are corroded;
- ◇ Users have special requirements can be negotiated with the manufacturer to solve.

Technical parameter

- ◇ Sampling rating: Voltage 100V/50Hz; Current 5A/50Hz;
- ◇ Working power supply voltage :110V/220V DC
- ◇ Power consumption: DC power consumption normal 10W; 15W AC power consumption current loop <0.75VA/ phase; Voltage loop <0.50VA/ phase;
- ◇ Overload characteristics:
 - The current loop is connected 20A for a long time;
 - Short time on 100A/1s;
 - Instantaneous on 500A/20ms;
 - 1.5 times the long-term operating rating of the voltage loop;
- ◇ Contact capacity: long-term connection 5A/220V(DC);
- ◇ Switching input :+24V/5mA, isolation withstand voltage 2000V;
- ◇ Measurement accuracy:
 - Current measurement accuracy :0.1A~6A is 0.5%, 6A~100A is 2%;
 - Voltage measurement accuracy: range 0V~150V, of which 60V~120V is 0.5%, other 1%;
 - Power measurement accuracy :1.0%;
 - Electrical measurement accuracy :(internal calculation)1.0% External pulse depends on pulse meter accuracy;
 - Protection delay accuracy :0.1s~20.00s delay error is not more than 25ms and 2.5% greater;
- ◇ Communication interface :RS-485, speed 9600Mbps;
- ◇ Insulation resistance :IEC255-5 standard, greater than 100kQ/500V;
- ◇ Voltage test according to :IEC255-5 standard, 2.0kV/50Hz 1min;
- ◇ Disturbance resistance: common mode 2.5kV/1MHz/2S, differential mode 10kV/1MHz/2S.

Order instructions

The user shall provide the following information when ordering:

- ◇ Product model, name, order quantity and color. If the side screen is needed, it must be indicated in the contract and drawings, and indicate the required quantity and color;
- ◇ Provide a full set of engineering screen layout, general equipment table, small bus layout and analog bus diagram;
- ◇ Front layout and equipment table of each screen;
- ◇ Secondary loop expansion diagram, terminal block diagram and associated primary system diagram for each panel;
- ◇ Other special requirements inconsistent with the normal conditions of use of the product.

ZBW-10 Outdoor combined substation




Summarize

ZBW series AC box type substation is the combination of high voltage electrical equipment, transformer, low voltage electrical equipment and so on into a compact complete set of distribution devices. It is used in urban high-rise buildings, urban and rural buildings, residential communities, high-tech development zones, small and medium-sized factories, mining and oil fields, and temporary construction electricity and other places for accepting and distributing electric energy in the power distribution system.

ZBW series box-type substation has the characteristics of strong complete set, small size, compact structure, safe and reliable operation, easy maintenance, and mobility. Compared with conventional civil substations, box-type substations with the same capacity usually cover an area of only 1/10~1/5 of conventional substations, which greatly reduces the design workload and construction amount, and reduces the construction cost. In the distribution system, it can be used in the ring network distribution system, and can also be used in the dual power supply or radiation terminal distribution system, which is a new complete set of equipment for the construction and transformation of urban and rural substations.

Compliance standards: GB/T 17467-1998 "High voltage/low voltage preassembled substation", SD320-92 "box-type substation technical conditions", DLT537-93 "6-35kV box-type substation ordering technical conditions" and ZBK4001-89 "combined substation" standards.

Model and meaning

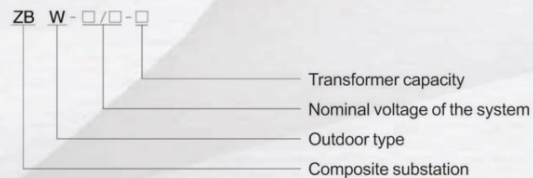

Environmental conditions of use

- ◆ The maximum ambient temperature is not higher than +40° C, the minimum is not lower than -25° C;
- ◆ The relative humidity of the air does not exceed 90%(+25° C);
- ◆ The altitude does not exceed 1000m;
- ◆ Is the horizontal acceleration of the earthquake 0.4m/S² Vertical acceleration 0.2m/S²;
- ◆ Outdoor wind speed does not exceed 35m/s;
- ◆ Place free from fire, explosion danger, serious pollution, chemical corrosion and violent vibration.
- ◆ Note: Special conditions of use, put forward to negotiate with the manufacturer when ordering.

Technical parameter

Item	Unit	High voltage electrical equipment	Transformer	Low-voltage electrical equipment
Rated voltage	kV	10,6	10/0.4,6/0.4	0.4
Rated current	A	630		100~2000
Rated frequency	HZ	50	50	50
Rated capacity	kVA		100~1250	
Rated heat stable current	kA	20/4S		30/1s
Rated dynamic stable current (peak)	kA	50		63
Rated closing short circuit current (peak)	kA	50		15~30
Rated short-circuit breaking current		31.5(Fuse)		
Rated breaking load current	A	630		
1min power frequency withstand voltage	kV	Ground to ground, phase to phase 42, fracture to phase 48	35/25 (5min)	2.0/2.5
Lightning impulse withstand voltage	kV	Ground to ground, phase to phase 75, fracture to phase 85	75	
Shell protection class		1P23	1P23	1P23
Noise level	dB		Oil ≤ 55 Dry ≤ 65	
Circuit number		3	2	8~15
Low voltage measurement of maximum reactive power compensation	Kvar			300

Order instructions

Please provide the following information when ordering:

- ◆ Box-type substation type;
- ◆ Transformer type and capacity;
- ◆ High and low circuit main wiring scheme;
- ◆ Models and parameters of electrical components with special requirements;
- ◆ The raw materials and color of the shell;
- ◆ Name, quantity and other requirements of spare parts and spare parts.


XBZ1 Intelligent (compact) box-type substation



Summarize

XBZ1 series intelligent box-type substation and XBJ1 series compact box-type substation it absorbs the advantages of the three major factions of American box, European box and domestic box, suitable for China's national characteristics, the use of new materials, new technology and advanced components and high and low voltage automation technology; Among them, the high voltage (12kV) side can meet the requirements of the power department for the automation of the distribution network, and the low voltage (0.4kV) side can meet the requirements of the intelligent property management of the community. The upper computer set in the central station or the property management office can be used to carry out "four-remote (telemetry, remote communication, remote adjustment, remote control) system management of the substation. When the intelligent box-type substation is connected to the "hand in hand" ring network power supply, with the cooperation of autonomous software, it can complete the automatic location of the fault section, fault cutting load transfer, network reconstruction and other functions. This series of intelligent box-type substation is a complete set of intelligent power supply and distribution devices optimized by the combination of high-voltage unit power transformer, low-voltage unit, metering unit and intelligent system. It has many functions, wide uses, reliable operation and beautiful appearance. And has the characteristics of easy installation, less occupation, less maintenance, less investment, quick effect, long life and so on. It can be used as power distribution equipment for urban buildings, residential areas, municipal facilities, factories, mines, highways, wharfs, oil fields and temporary electricity construction places. XBJ1 compact box-type substation has the same intelligent box-type substation except that it does not have an intelligent system.

Model and meaning

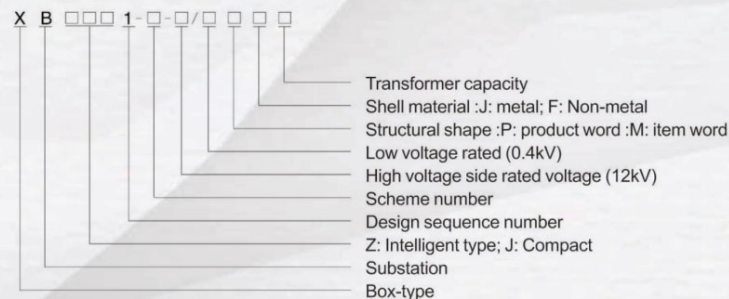

Note: The above models are referred to as XBZ1 series and XBJ1 series.

Environmental conditions of use

- ◇ Temperature around 15 °C ~ + 40 °C (intelligent - 5 °C ~ + 40 °C), (special order conditions: the cold climate - 50 °C ~ + 40 °C; The hot climate is -5 °C ~ +50 °C);
- ◇ The daily average relative humidity is not more than 95%; The monthly average is not more than 90%;
- ◇ The altitude is generally not more than 2000m;
- ◇ Outdoor wind speed does not exceed 35m/s;
- ◇ The horizontal acceleration of seismic intensity is less than 0.3m/s²;
- ◇ Places without frequent severe vibration;
- ◇ The surrounding air should be free from obvious pollution such as corrosive or combustible gases;
- ◇ Installation inclination shall not exceed 3 degrees;
- ◇ Wind load ≤ 34m/s;
- ◇ Note: If the above specified conditions of use are exceeded, the user and the manufacturer shall negotiate to solve the problem.

Technical parameter

Item		Unit	Numerical value
Rated voltage	High pressure side	kV	12
	Low pressure side	kV	0.4
	Auxiliary loop AC	V	110、220、380
	Auxiliary circuit DC	V	24
Rated capacity of transformer		kVA	100、125、160、200、250、315、400、500、630、800、1000、1250、1600
Rated current	High tension	A	400、630
	Low pressure	A	100~2500
Rated frequency		Hz	50(60)(Max. 125A with fuse)
Rated noise level	Oil-immersed transformer	db	≤ 50
	Dry transformer	db	≤ 55

The reactive power compensation standard is 30% of the transformer capacity (can be increased or decreased according to user demand).

Order instructions

Please provide the following information when ordering:

- ◇ Box-type substation type; Type, capacity, scheme, selection of main components, special requirements and delivery deadline of box-type substation;
- ◇ Box type substation shell materials (stainless steel plate, aluminum alloy plate, thin steel plate, special cement board) and the choice of modeling color;
- ◇ Specifications, modes and circuit numbers of incoming and outgoing cables of box-type substation;
- ◇ Power intelligent management network or property management for box-type substation network configuration requirements.

PLC/LCU Automatic control cabinet



Summarize

PLC/LCU automatic control cabinet refers to a complete set of control cabinets, which can realize motor control and switch control.

PLC/LCU control cabinet with overload, short circuit, phase loss protection functions. It has compact structure, stable operation, complete functions, can be combined according to the actual control instrument, not only can realize the automatic control of a single cabinet, but also can realize the distributed control (DCS) system composed of multiple cabinets through industrial Ethernet or industrial fieldbus network. Can adapt to various sizes of industrial automation control occasions, widely used in electric power, metallurgy, chemical industry, paper, environmental protection sewage management, etc.

PLC/LCU control cabinet can complete equipment automation and process automation control, achieve perfect network functions, with stable performance, strong scalability, strong anti-interference ability, is the core and soul of modern industry. Users can design PLC/LCU control cabinets, frequency conversion cabinets, etc. According to their own requirements, this can be matched with the man-machine interface touch screen to achieve the purpose of easy operation.

Typical applications are constant pressure water supply, air compressors, fans and pumps, central air conditioning, port machinery, machine tools, boilers, paper machinery, food machinery, etc.

Environmental conditions of use

- ◆ The maximum ambient air temperature is not higher than +40° C, the minimum is not lower than -5° C, and the average temperature within 24 hours is not higher than +35° C. If the capacity exceeds the capacity, reduce the operation according to the actual situation.
- ◆ The relative humidity of the surrounding air does not exceed 50% when the maximum temperature is +40° C, and allows a larger relative humidity at a lower temperature;
- ◆ The altitude does not exceed 2000m;
- ◆ Other special requirements.
- ◆ The incline between the installation and the vertical plane of the switchgear shall not exceed 5°.

Technical parameter

Item	Numerical value
Rated insulation voltage	660V
Rated operating voltage	380V, 660V
Maximum working current of main bus	4000A
Main bus Short time (IS) withstand current (RMS)	80kA
Main bus short time (Max)	176kA
Maximum operating current of the distribution bus (vertical bus)	2000A
Distribution bus (vertical bus) Short-term peak current (maximum)	125kA

Order instructions

The user should provide the following information when ordering:

- ◆ Primary loop scheme and single-line system diagram;
- ◆ Secondary circuit schematic or wiring diagram;
- ◆ The layout of the device and the layout of the distribution room;
- ◆ Detailed specifications and quantities of the various electrical equipment contained in each unit;
- ◆ Provide the working current and short circuit current of the horizontal bus, and select the bus specifications according to the factory standard (the factory standard bus specifications are 10x30x2, 10x60x2, 10x80x2, 10x60x4, 10x80x2x2, 10x60x4x2), if the bus specifications are not indicated, it will be selected by the manufacturer;
- ◆ Bus system L1, L2, L3, N, PE or L1, L2, L3, PEN, if not indicated as selected by the manufacturer;
- ◆ Provide the use name of each loop (limited to 10 words), if not provided, the manufacturer only provides a blank symbol plate;
- ◆ The protection level of the device shell (IP30, IP40) should be closed at the bottom of the cabinet, if not indicated, it is IP30, the bottom of the cabinet is not closed;
- ◆ The color of the paint film on the surface of the device, if not indicated, is camel gray;
- ◆ The functional unit and installation diagram of the movable MCC;
- ◆ The material of the cabinet, if not indicated, shall be selected by the manufacturer;
- ◆ Other special requirements inconsistent with the normal use of the product.

Our service goal:

Product quality without complaints,
customer service with profession.

Service standard:

Warm, thoughtful, timely and effective.

Quality system certification:

Pass ISO9001 quality system certification, ISO45001 Quality System, Environment System and OHSAS 18000 Occupation Health Safety Management System implement intellectual property management system Center "quality" as first working principle.







BUILD WITH MIND SERVE WITH HEART.2026



JIEZOU POWER DUBAI

Address:

Plot no. S60810 , Street no S1500, Jafza South Jebel Ali Free Zone Dubai United Ar

Email:

shentong@jiezougroup.com

JIEZOU POWER CHINA

Address:

1101,1108 Room Building A No.99 Youxiang Road Wuzhong District Suzhou,Jiangsu,China

Email:

shentong@jiezougroup.com

JIEZOU POWER USA

Address:

1243 N Roseburg Ct, Visalia, CA 93291

Email:

info@jiezougroup.com

JIEZOU POWER CANADA

Address:

3348 Harvester Road, Unit #2 Burlington, ON L7N 3M8

Email:

info@jiezougroup.com

JIEZOU POWER PHILIPPINES

Address:

Fernandez Ext., Bgy. Tanglaw, Puerto Princesa, Philippines

Email:

shentong@jiezougroup.com

JIEZOU POWER DOMINICAN REPUBLIC

Address:

Gustavo Mejia Ricart #11 Edif, Rogama, local 1Ey 3ENaco. Santo Domingo, República Dominicana

Email:

info@jiezougroup.com