

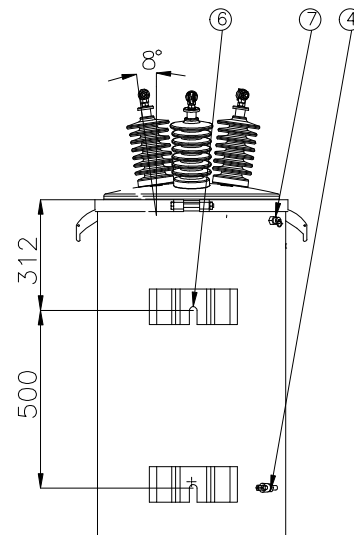
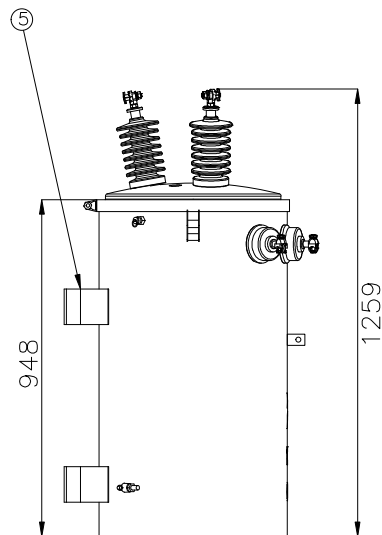
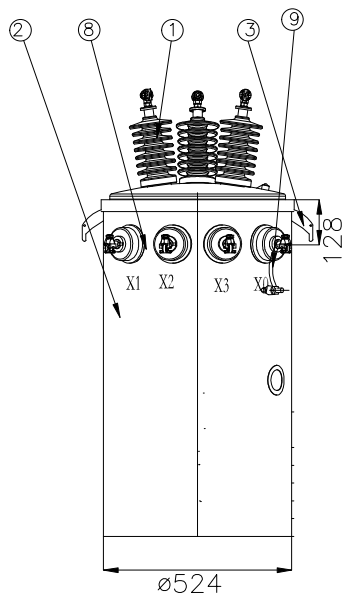



NAMEPLATE
DETAIL




GROUNDING COUNECTOR
DETAIL



HV BUSHING TERMINAL
DETAIL



LV BUSHING TERMINAL
DETAIL



TECHNICAL DATA	
RATING	45kVA
PRIMARY VOLTAGE(V)	12000 DELTA
SECONDARY VOLTAGE(V)	480Y/277
INSULATION LEVEL(kV) H.V BIL	95
INSULATION LEVEL(kV) L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
CONDUCTOR	AL
INSULATING OIL	FR3
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	910W
NO LOAD LOSSES	130W
IMPEDANCE	>1.8%
ALTITUDE	≤1000m
COLOR	ANSI 70

ITEM	WEIGHT
UNTANK WEIGHT	405 Lbs
TOTAL OIL WEIGHT	315 Lbs
TOTAL WEIGHT	835 Lbs

PARTS LIST		
ITEM	DESCRIPTION	QTY
1	HV BUSHING (15KV,55A)	3
2	TANK COVER	1
3	LIFTING LUG	2
4	GROUNDING COUNECTOR	2
5	NAMEPLATE	1
6	BOTTOM BRACKET	2
7	WEIDMANN	1
8	LV BUSHING(1.2KV 208A)	4
9	COPPER STRIP	1
10	NO PCB	1

TYPE
SM-45/12/0.48/0.277

DWG. NAME
General Assembly Drawing

DRAWN	CHECKED	CHECKED		APPROVED
Mike	Jack	Iris		Sam

FIRST ANGLE PROJECTION SCALE 1

REV. NO.

JIEZOU POWER