

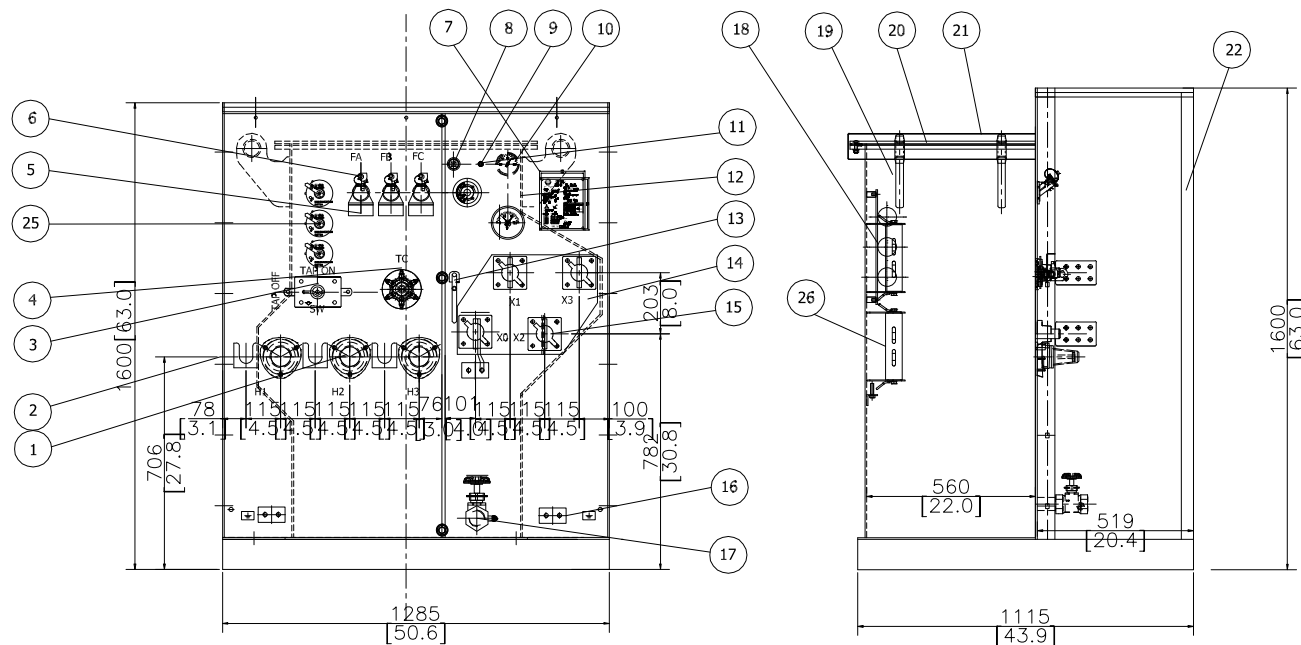

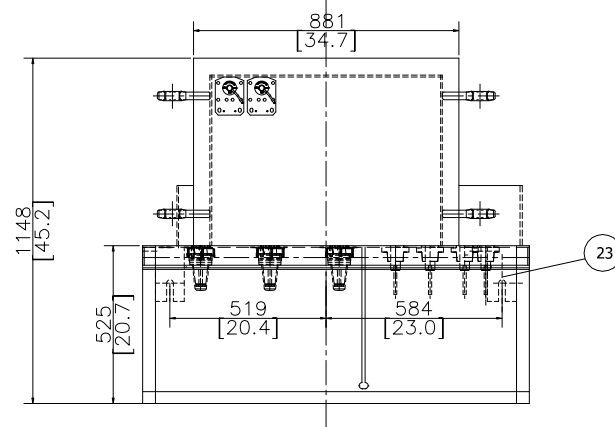



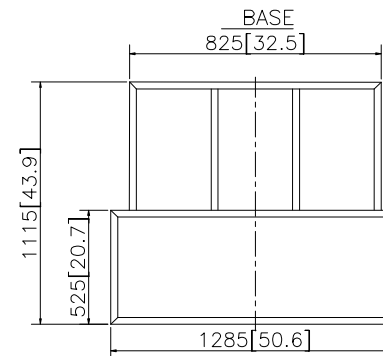

L.V. TERMINAL

GROUND PAD
STAINLESS STEEL

NAMEPLATE

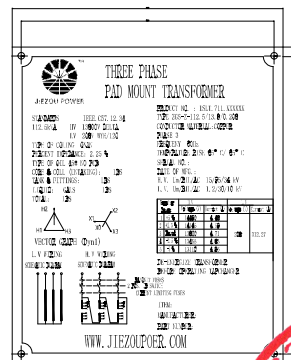

TECHNICAL DATA	
RATING	112.5kVA
PRIMARY VOLTAGE	13800 DELTA V
SECONDARY VOLTAGE	208WYE/120V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	COPPER
INSULATION LEVEL(KV)	H.V BIL 95 X.V BIL 30
COOLING METHOD	ONAN
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	1800W
NO LOAD LOSSES	200W
IMPEDANCE	2-4.5%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	MUNSELL GREEM 7 GY.39/15
CORE FORM	THREE-PHASE THREE-COLUMN

ITEM	WEIGHT
TANK & ACCESORIES	700Kg
TOTAL OIL WEIGHT	495L
TOTAL WEIGHT	1465Kg

26	18KV UNDER-OIL ARRESTER	3
25	UNDER-OIL ARRESTER DISCONNECTOR	3
24	GROUND STRAP COPPER	1
23	FOUNDATION TIE DOWN CLAMP, Steel	2
22	HINGED DOOR	2
21	RAIN COVER	1
20	FLIP TOP COVER	1
19	LIFTING LUG	4
18	ELSP FUSE	3
17	1.0" DRAIN/SAMPLING VALVE	1
16	CSA GROUND BRACKET ASSY	3
15	750-1000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
14	LV BUSHING 4HOLE, 1000 AMP-30 BIL	4
13	FIAT PADLOCK DOOR AND LOCK C/A 3 PENTAHEAD BOLTS IN STAINLESS	1
12	OIL THERMOMETER GAUGE	1
11	OIL LEVEL GAUGE	1
10	PRESSURE RELIEF VALVE	1
9	VACUUM PRESSURE GAUGE	1
8	1.0" UPPER FILL PLUG	1
7	NAMEPLATE	2
6	BAYONET FUZE HOLDER-FLAPPER V.	3
5	BAYONET DRIP TRAY	3
4	TAP CHANGER 3PH	1
3	TWO POSITION LOADBREAKER SWITCH	1
2	PARKING STAND BRACKET	3
1	HV BUSHING, 200A, 15KV	3
ITEM	DESCRIPTION	QTY

OPTIONAL TRANSFORMER PARTS LIST

TYPE
JZP-3PD-01125.13800

DWG. NAME

General Assembly Drawing

DRAWN	CHECKED	CHECKED	APPROVED
Mike	Iris	Jack	Sam




FIRST ANGLE PROJECTION	SCALE	1	PROJECT: MVBA20070
------------------------	-------	---	--------------------





JIEZOU POWER

REV.
NO.

0

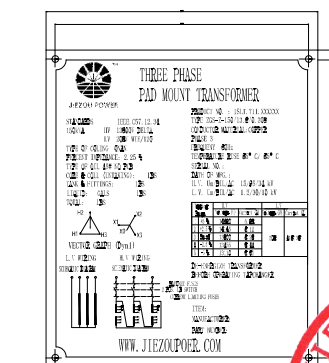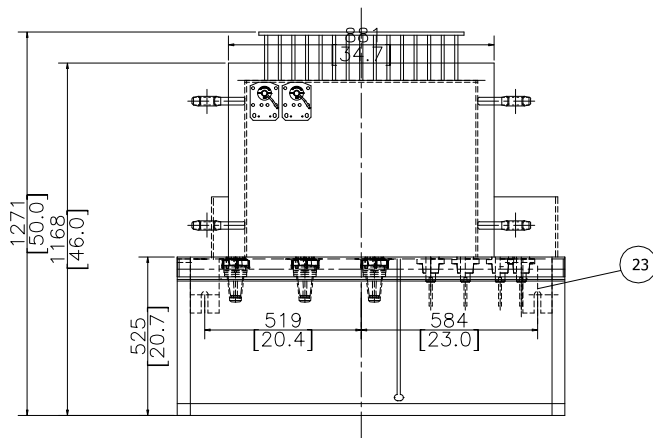

GROUND PAD
STAINLESS STEEL

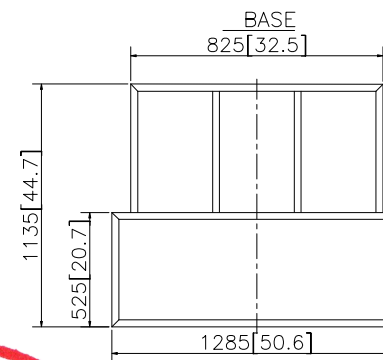

ITEM	WEIGHT
TANK & ACCESSORIES	710Kg
TOTAL OIL WEIGHT	515L
TOTAL WEIGHT	1565Kg

26	18KVUNDER-OILARRESTER	3
25	UNDER-OIL ARRESTER DISCONNECTOR	3
24	GROUND STRAP COPPER	1
23	FOUNDATION TIE DOWN CLAMP, Steel,	2
22	HINGED DOOR	2
21	RAIN COVER	1
20	FLIP TOP COVER	1
19	LIFTING LUG	4
18	ELSP FUSE	3
17	1.0" DRAIN/SAMPLING VALVE	1
16	CSA GROUND BRACKET ASSY	3
15	750-4000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
14	LV BUSHING 4HOLE, 1000 AMP-30 BIL	4
13	FIAT PADLOCK DOORAND LOCK C/A 3 PENTAHEAD BOLTS IN STAINLESS	1
12	OIL THERMOMETER GAUGE	1
11	OIL LEVEL GAUGE	1
10	PRESSURE RELIEF VALVE	1
9	VACUUM PRESSURE GAUGE	1
8	1.0" UPPER FILL PIUG	1
7	NAMEPLATE	2
6	BAYONET FUZE HOLDER-FLAPPER V.	3
5	BAYONET DRIP TRAY	3
4	TAP CHANGER 3PH	1
3	TWO POSITION LOADBREAKER SWITCH	1
2	PARKING STAND BRACKET	3
1	HV BUSHING , 200A, 15KV	3
ITEM	DESCRIPTION	QTY

DWG. NAME	General Assembly Drawing
-----------	--------------------------







DRAWN	CHECKED	CHECKED		APPROVED
Mike	Iris	Jack		Sam

FIRST ANGLE PROJECTION	SCALE	1	PROJECT: MVBA20070
---------------------------	-------	---	--------------------



JIEZOU POWER

REV.
NO.

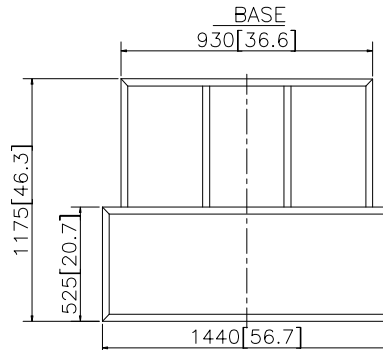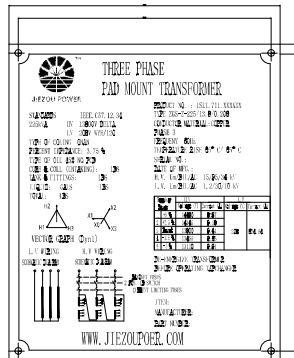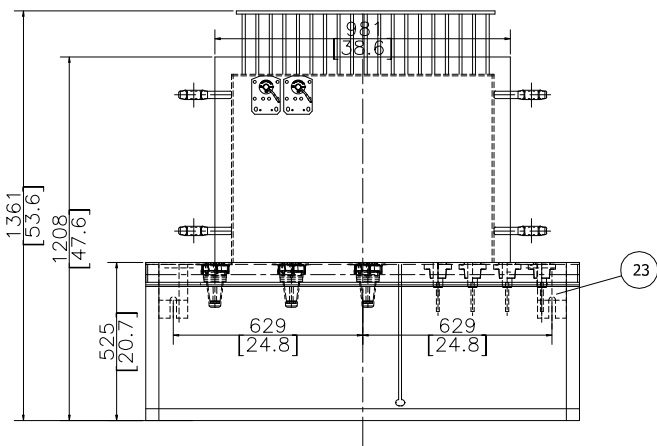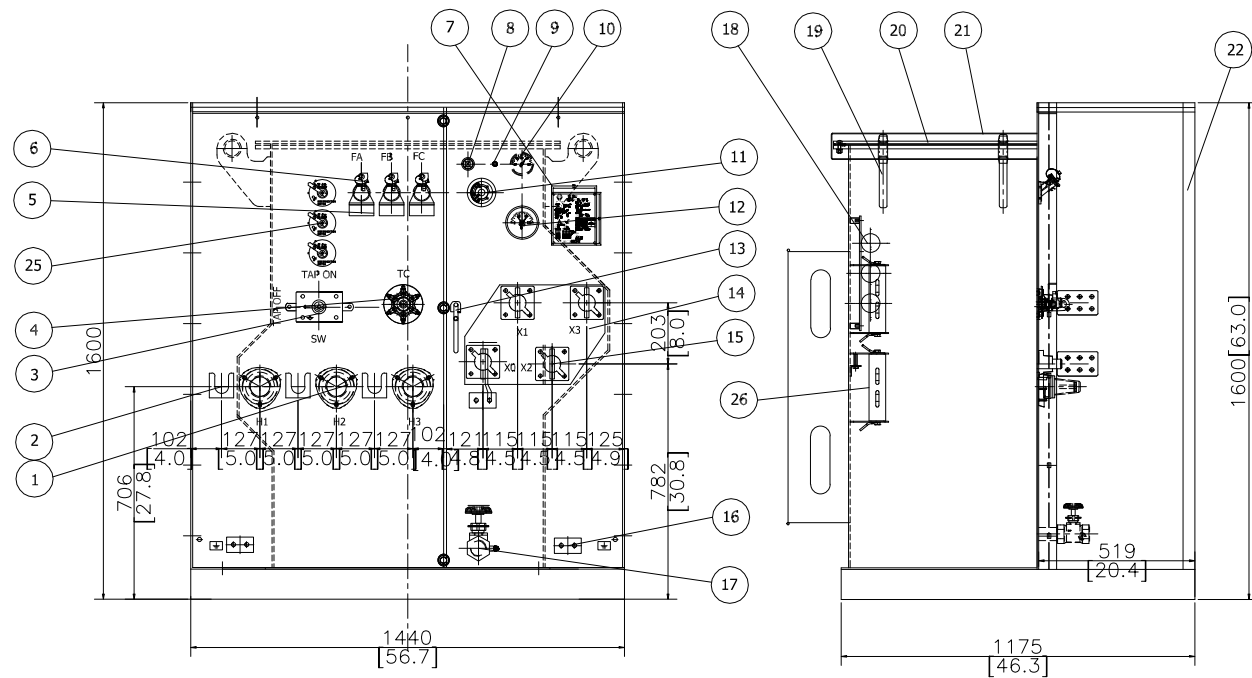

TECHNICAL DATA	
RATING	225kVA
PRIMARY VOLTAGE	13800 DELTA V
SECONDARY VOLTAGE	208WYE/120V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	COPPER
INSULATION LEVEL(kV)	H.V BIL 95 X.V BIL 30
COOLING METHOD	ONAN
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	2850W
NO LOAD LOSSES	370W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	MUNSELL GREEN 7 GY3.29/15
CORE FORM	THREE-PHASE THREE-COLUMN

ITEM	WEIGHT
TANK & ACCESORIES	755Kg
TOTAL OIL WEIGHT	605L
TOTAL WEIGHT	1835Kg

26	18KV UNDER-OIL ARRESTER	3
25	UNDER-OIL ARRESTER DISCONNECTOR	3
24	GROUND STRAP COPPER	1
23	FOUNDATION TIE DOWN CLAMP, Steel,	2
22	HINGED DOOR	2
21	RAIN COVER	1
20	FLIP TOP COVER	1
19	LIFTING LUG	4
18	ELSP FUSE	3
17	1.0" DRAIN/SAMPLING VALVE	1
16	CSA GROUND BRACKET ASSY	3
15	750-4000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
14	LV BUSHING 6HOLE, 1000 AMP-30 BIL	4
13	FIAT PADLOCK DOOR AND LOCK C/A 3 PENTAHEAD BOLTS IN STAINLESS	1
12	OIL THERMOMETER GAUGE	1
11	OIL LEVEL GAUGE	1
10	PRESSURE RELIEF VALVE	1
9	VACUUM PRESSURE GAUGE	1
8	1.0" UPPER FILL PLUG	1
7	NAMEPLATE	2
6	BAYONET FUZE HOLDER-FLAPPER V.	3
5	BAYONET DRIP TRAY	3
4	TAP CHANGER 3PH	1
3	TWO POSITION LOADBREAKER SWITCH	1
2	PARKING STAND BRACKET	3
1	HV BUSHING, 200A, 15KV	3
ITEM	DESCRIPTION	QTY

DWG. NAME

General Assembly Drawing

FIRST ANGLE PROJECTION

SCALE

1


PROJECT: MVBA20070

REV. NO.

0





JIEZOU POWER

Logo






ZG-225/13.8/0.208

DRAWN	CHECKED	CHECKED	APPROVED
Mike	Is	Jack	Sam

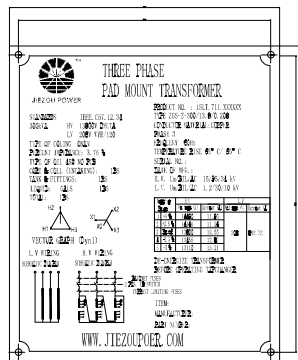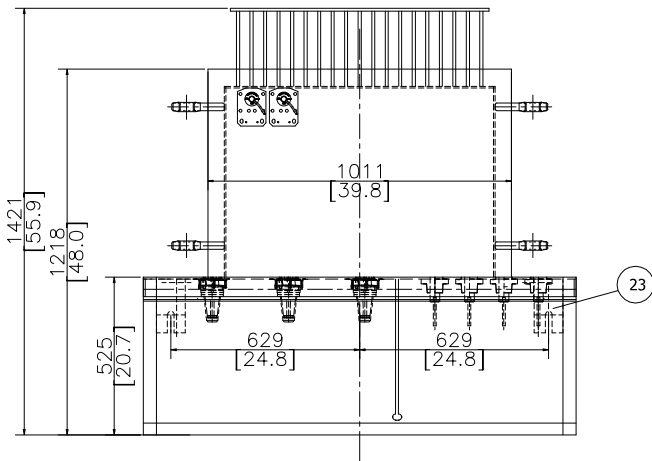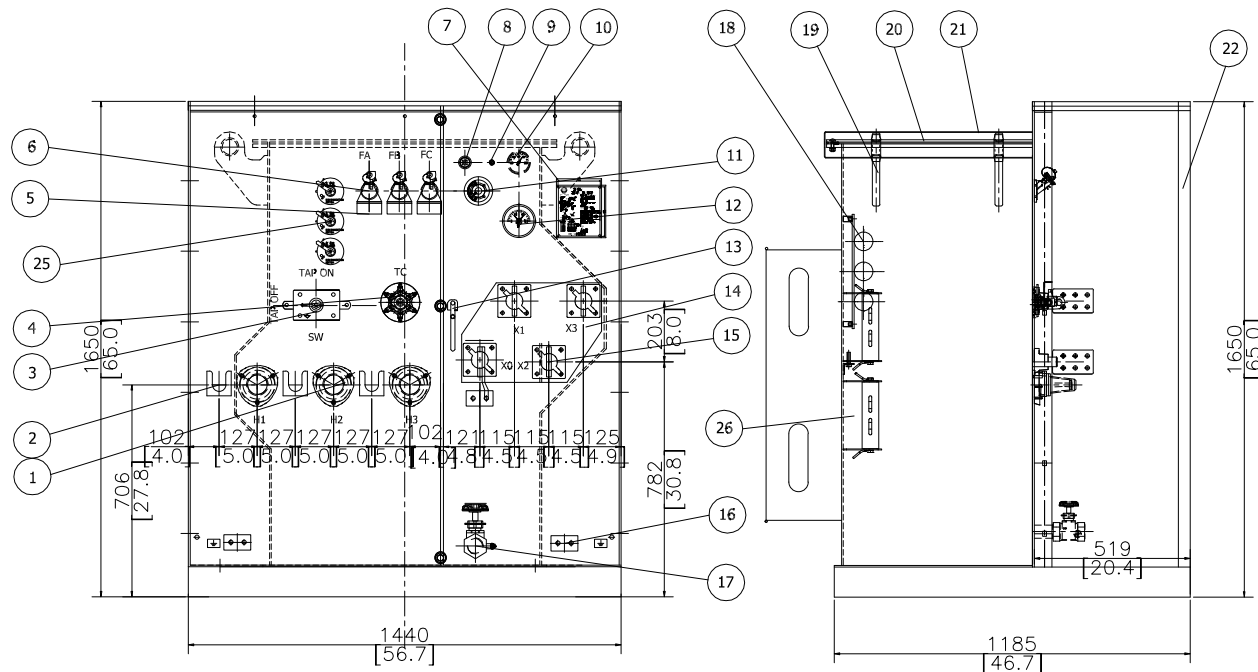

GROUND PAD
STAINLESS STEEL

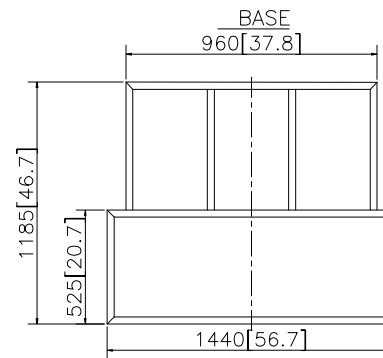

TECHNICAL DATA	
RATING	300kVA
PRIMARY VOLTAGE	13800 DELTA V
SECONDARY VOLTAGE	208WYE/120V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	COPPER
INSULATION LEVEL(KV)	H.V BIL 95 X.V BIL 30
COOLING METHOD	ONAN
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	3600W
NO LOAD LOSSES	460W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	MUNSELL GREEN 7 GY3.29/15
CORE FORM	THREE-PHASE THREE-COLUMN

ITEM	WEIGHT
TANK & ACCESORIES	785Kg
TOTAL OIL WEIGHT	660L
TOTAL WEIGHT	2010Kg

26	18KV UNDER-OIL ARRESTER	3
25	UNDER-OIL ARRESTER DISCONNECTOR	3
24	GROUND STRAP COPPER	1
23	FOUNDATION TIE DOWN CLAMP, Steel	2
22	HINGED DOOR	2
21	RAIN COVER	1
20	FLIP TOP COVER	1
19	LIFTING LUG	4
18	ELSP FUSE	3
17	1.0" DRAIN/SAMPLING VALVE	1
16	CSA GROUND BRACKET ASSY	3
15	750-4000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
14	LV BUSHING 6HOLE, 1000 AMP-30 BIL	4
13	FIAT PADLOCK DOOR AND LOCK C/A 3 PENTAHEAD BOLTS IN STAINLESS	1
12	OIL THERMOMETER GAUGE	1
11	OIL LEVEL GAUGE	1
10	PRESSURE RELIEF VALVE	1
9	VACUUM PRESSURE GAUGE	1
8	1.0" UPPER FILL PLUG	1
7	NAMEPLATE	2
6	BAYONET FUZE HOLDER-FLAPPER V.	3
5	BAYONET DRIP TRAY	3
4	TAP CHANGER 3PH	1
3	TWO POSITION LOADBREAKER SWITCH	1
2	PARKING STAND BRACKET	3
1	HV BUSHING, 200A, 15KV	3
ITEM	DESCRIPTION	QTY

OPTIONAL TRANSFORMER PARTS LIST

DWG. NAME
General Assembly Drawing

JZP.3PD.00300/13.8/0.208


DRAWN	CHECKED	CHECKED	APPROVED
Mike	Jack		Sam

FIRST ANGLE PROJECTION	SCALE	1	PROJECT: MVBA20070
------------------------	-------	---	--------------------





JIEZOU POWER

REV. NO.





ON
GMD



JZP-3PD.00300.13800.220

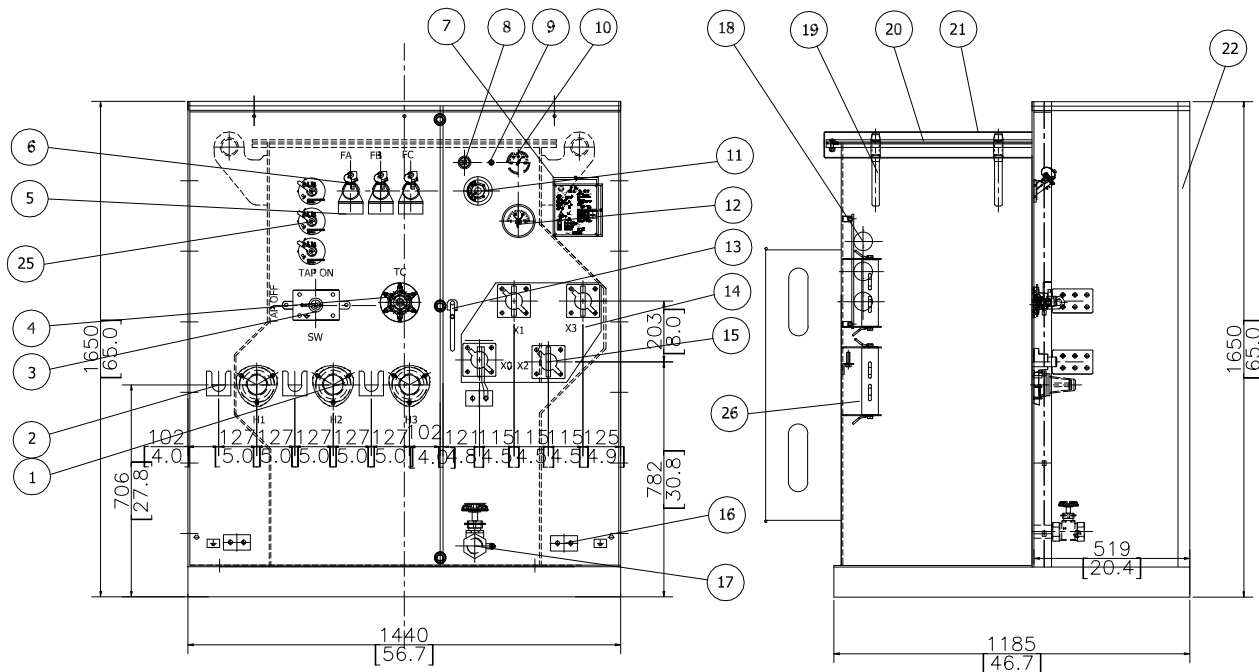

GROUND PAD
STAINLESS STEEL

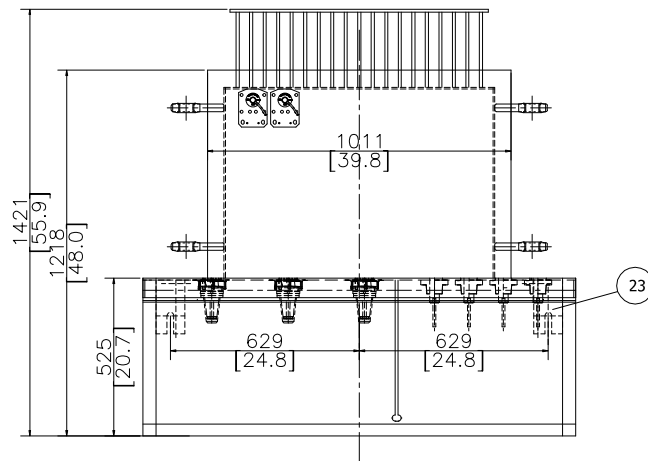

NAMEPLATE

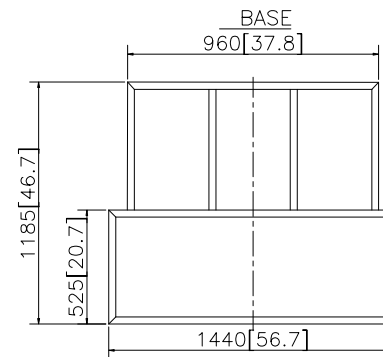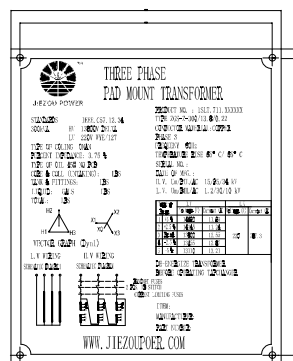

TECHNICAL DATA	
RATING	300kVA
PRIMARY VOLTAGE	13800 DELTA V
SECONDARY VOLTAGE	220WYE/127V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	COPPER
INSULATION LEVEL(KV)	H.V BIL 95 X.V BIL 30
COOLING METHOD	ONAN
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	3600W
NO LOAD LOSSES	460W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	MUNSELL GREEN 7 GY3.29/15
CORE FORM	THREE-PHASE THREE-COLUMN

ITEM	WEIGHT
TANK & ACCESORIES	785Kg
TOTAL OIL WEIGHT	660L
TOTAL WEIGHT	2010Kg

26	18KV UNDER-OIL ARRESTER	3
25	UNDER-OIL ARRESTER DISCONNECTOR	3
24	GROUND STRAP COPPER	1
23	FOUNDATION TIE DOWN CLAMP, Steel	2
22	HINGED DOOR	2
21	RAIN COVER	1
20	FLIP TOP COVER	1
19	LIFTING LUG	4
18	ELSP FUSE	3
17	1.0" DRAIN/SAMPLING VALVE	1
16	CSA GROUND BRACKET ASSY	3
15	750-1000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
14	LV BUSHING 6HOLE, 1000 AMP-30 BIL	4
13	FIAT PADLOCK DOOR AND LOCK C/A 3 PENTAHEAD BOLTS IN STAINLESS	1
12	OIL THERMOMETER GAUGE	1
11	OIL LEVEL GAUGE	1
10	PRESSURE RELIEF VALVE	1
9	VACUUM PRESSURE GAUGE	1
8	1.0" UPPER FILL PLUG	1
7	NAMEPLATE	2
6	BAYONET FUZE HOLDER-FLAPPER V.	3
5	BAYONET DRIP TRAY	3
4	TAP CHANGER 3PH	1
3	TWO POSITION LOADBREAKER SWITCH	1
2	PARKING STAND BRACKET	3
1	HV BUSHING, 200A, 15KV	3
ITEM	DESCRIPTION	QTY

OPTIONAL TRANSFORMER PARTS LIST

DWG. NAME
General Assembly Drawing

FIRST ANGLE PROJECTION SCALE 1 PROJECT: MVBA20070



REV. NO.



0





DRAWN: [blank] CHECKED: [blank] CHECKED: [blank] APPROVED: [blank]
 Like: [blank] Jack: [blank] Sam: [blank]

ON
GMD



JZP.3PD.00300.13800.480

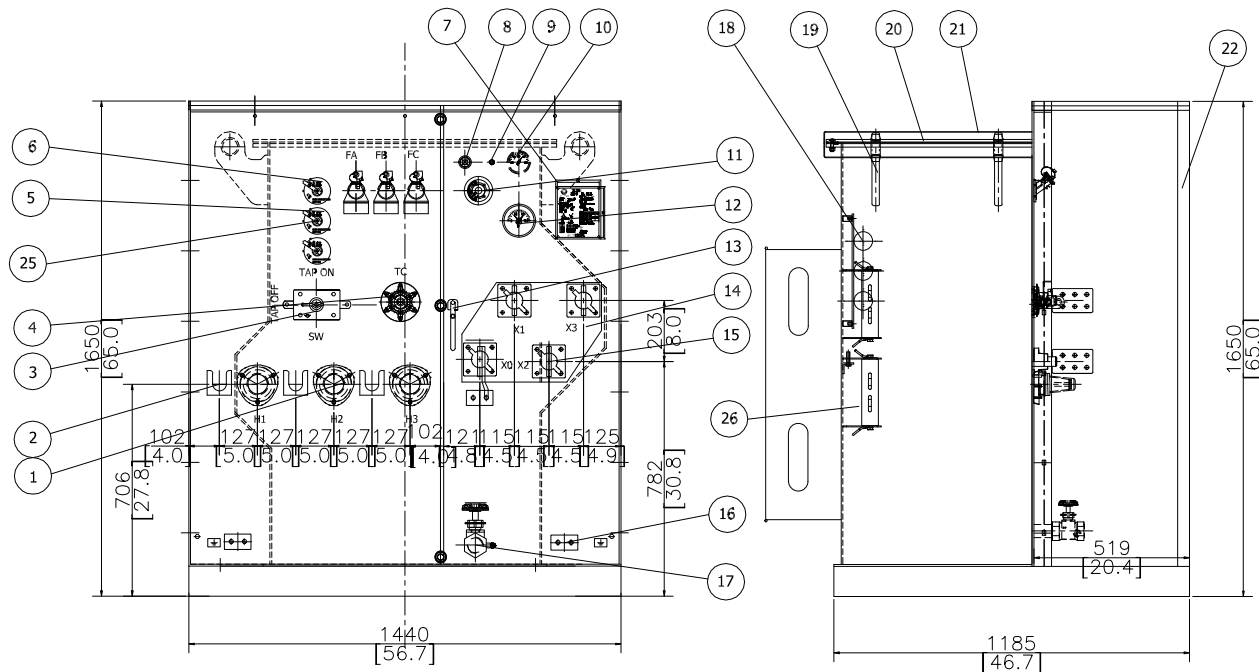

GROUND PAD
STAINLESS STEEL

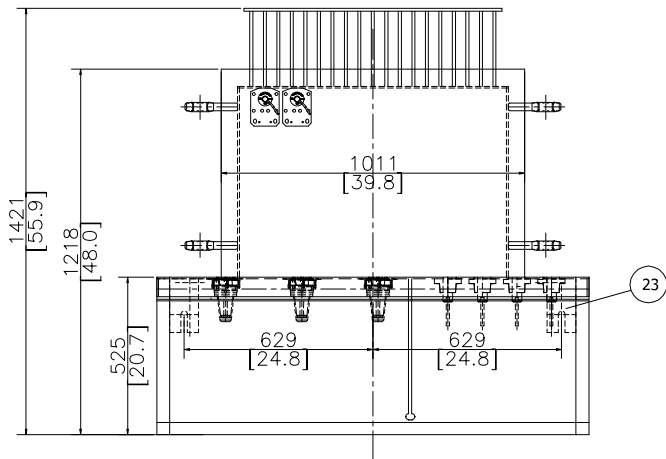

NAMEPLATE

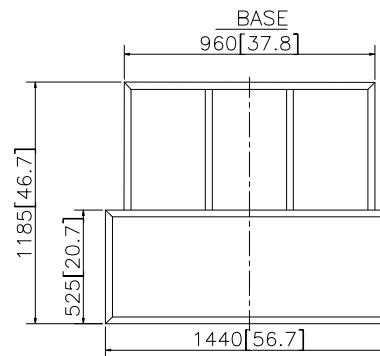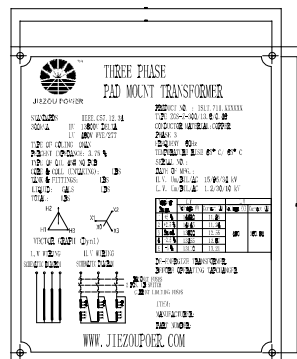

TECHNICAL DATA	
RATING	300kVA
PRIMARY VOLTAGE	13800 DELTA V
SECONDARY VOLTAGE	480WYE/277V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	COPPER
INSULATION LEVEL(kV)	H.V BIL 95 X.V BIL 30
COOLING METHOD	ONAN
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	3600W
NO LOAD LOSSES	460W
IMPEDANCE	3.5-4.5%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	MUNSELL GREEN 7 GY3.29/15
CORE FORM	THREE-PHASE THREE-COLUMN

ITEM	WEIGHT
TANK & ACCESORIES	785Kg
TOTAL OIL WEIGHT	660L
TOTAL WEIGHT	2010Kg

26	18KV UNDER-OIL ARRESTER	3
25	UNDER-OIL ARRESTER DISCONNECTOR	3
24	GROUND STRAP COPPER	1
23	FOUNDATION TIE DOWN CLAMP, Steel	2
22	HINGED DOOR	2
21	RAIN COVER	1
20	FLIP TOP COVER	1
19	LIFTING LUG	4
18	ELSP FUSE	3
17	1.0" DRAIN/SAMPLING VALVE	1
16	CSA GROUND BRACKET ASSY	3
15	750-4000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
14	LV BUSHING 6HOLE, 1000 AMP-30 BIL	4
13	FIAT PADLOCK DOOR AND LOCK C/A 3 PENTAHEDRAL BOLTS IN STAINLESS	1
12	OIL THERMOMETER GAUGE	1
11	OIL LEVEL GAUGE	1
10	PRESSURE RELIEF VALVE	1
9	VACUUM PRESSURE GAUGE	1
8	1.0" UPPER FILL PLUG	1
7	NAMEPLATE	2
6	BAYONET FUZE HOLDER-FLAPPER V.	3
5	BAYONET DRIP TRAY	3
4	TAP CHANGER 3PH	1
3	TWO POSITION LOADBREAKER SWITCH	1
2	PARKING STAND BRACKET	3
1	HV BUSHING, 200A, 15KV	3
ITEM	DESCRIPTION	QTY

OPTIONAL TRANSFORMER PARTS LIST

DWG. NAME
General Assembly Drawing

300/13.8/0.48

DRAWN	CHECKED	CHECKED	APPROVED
Jack	Jack	Sam	








FIRST ANGLE PROJECTION SCALE 1 PROJECT: MVBA20070



JIEZOU POWER

REV. NO.

0

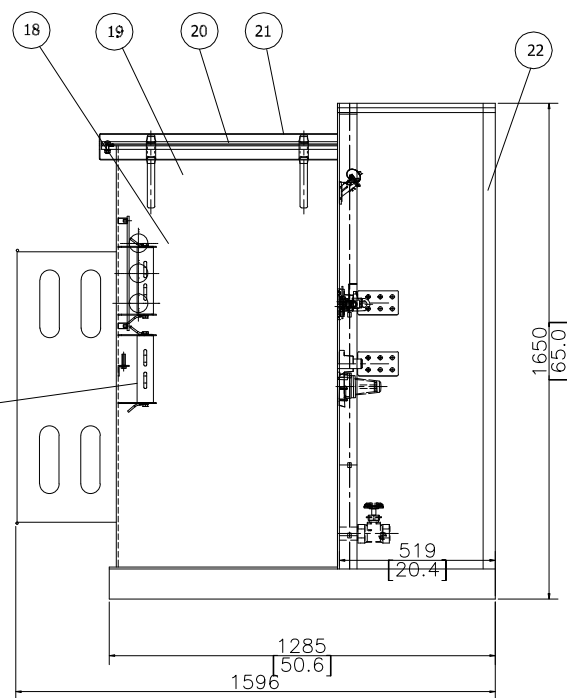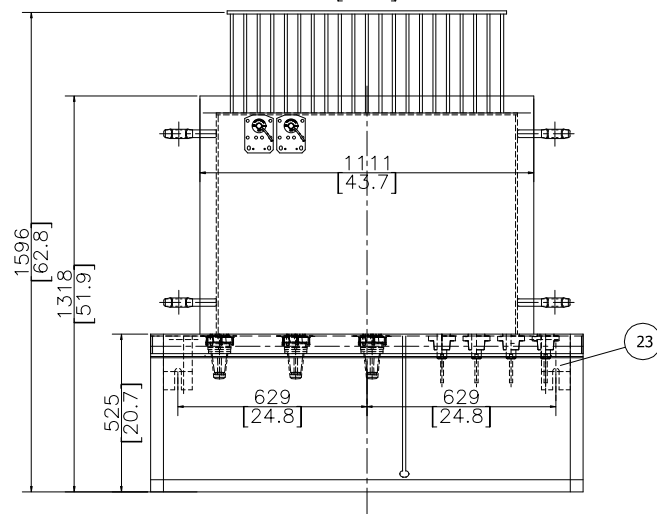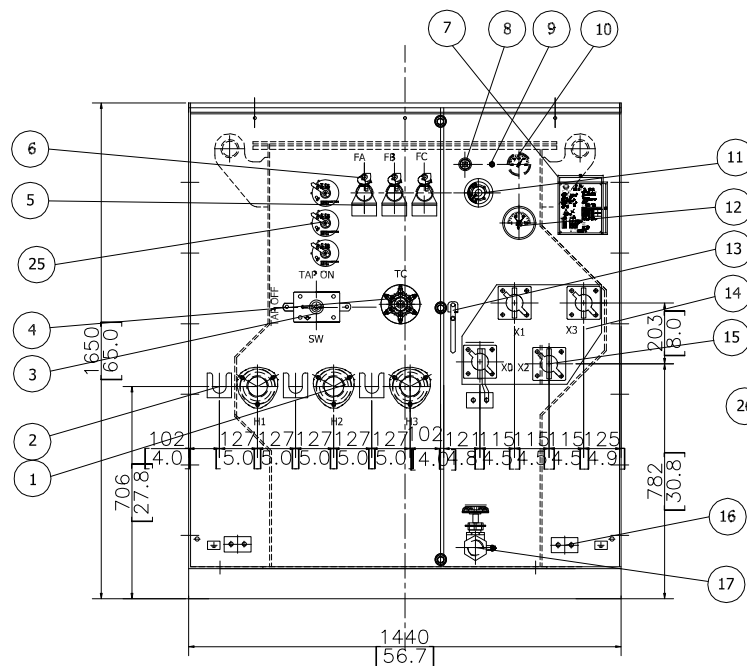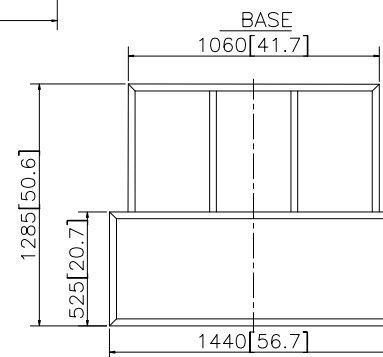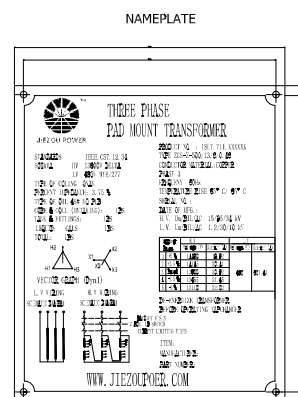GROUND PAD
STAINLESS STEEL

TECHNICAL DATA	
RATING	500kVA
PRIMARY VOLTAGE	13800 DELTA V
SECONDARY VOLTAGE	480WYE/277V
FREQUENCY	60Hz
VECTOR GROUP	Dyn1
WINDING MATERIAL	COPPER
INSULATION LEVEL(KV)	H.V BIL 95 X.V BIL 30
COOLING METHOD	ONAN
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	5400W
NO LOAD LOSSES	680W
IMPEDANCE	4-6%
ALTITUDE	≤1000m
No. OF TAPPOSITION	5
COLOR	MUNSELL GREEN 7 GY3.29/15
CORE FORM	THREE-PHASE THREE-COLUMN

ITEM	WEIGHT
TANK & ACCESORIES	850Kg
TOTAL OIL WEIGHT	840L
TOTAL WEIGHT	2450Kg

26	18KV UNDER-OIL ARRESTER	3
25	UNDER-OIL ARRESTER DISCONNECTOR	3
24	GROUND STRAP COPPER	1
23	FOUNDATION TIE DOWN CLAMP, Steel,	2
22	HINGED DOOR	2
21	RAIN COVER	1
20	FLIP TOP COVER	1
19	LIFTING LUG	4
18	ELSP FUSE	3
17	1.0" DRAIN/SAMPLING VALVE	1
16	CSA GROUND BRACKET ASSY	3
15	750-4000 PADMOUNT LV PLATE, 304L S.S. 3/16in	1
14	LV BUSHING 6HOLE, 1000 AMP-30 BIL	4
13	FIAT PADLOCK DOOR AND LOCK C/A 3 PENTAHEAD BOLTS IN STAINLESS	1
12	OIL THERMOMETER GAUGE	1
11	OIL LEVEL GAUGE	1
10	PRESSURE RELIEF VALVE	1
9	VACUUM PRESSURE GAUGE	1
8	1.0" UPPER FILL PLUG	1
7	NAMEPLATE	2
6	BAYONET FUZE HOLDER-FLAPPER V.	3
5	BAYONET DRIP TRAY	3
4	TAP CHANGER 3PH	1
3	TWO POSITION LOADBREAKER SWITCH	1
2	PARKING STAND BRACKET	3
1	HV BUSHING, 200A, 15KV	3
ITEM	DESCRIPTION	QTY

OPTIONAL TRANSFORMER PARTS LIST

DWG. NAME
General Assembly Drawing

Z-500/13.8/0.48

DRAWN	CHECKED	CHECKED	APPROVED
Jack	Jack	Sam	

FIRST ANGLE PROJECTION SCALE 1 PROJECT: MVBA20070



JIEZOU POWER

REV.
NO.

0